

# **SHURE®**

## **AD1**

### **Axient**

### **Digital**

### **Transmitter**



## **SHURE AD1 Axient Digital Transmitter User Guide**

[Home](#) » [Shure](#) » SHURE AD1 Axient Digital Transmitter User Guide 

### **Contents**

- [1 SHURE AD1 Axient Digital Transmitter](#)
- [2 Product Specifications](#)
- [3 Product Usage Instructions](#)
- [4 IMPORTANT SAFETY INSTRUCTIONS](#)
- [5 FEATURES](#)
- [6 AD1 Transmitter Overview](#)
- [7 Transmitter Controls](#)
- [8 Home Screen Display](#)
- [9 Battery Installation](#)
- [10 Shure SB900A Rechargeable Battery](#)
- [11 Menu Parameters](#)
- [12 Menu Parameter Descriptions](#)
- [13 IR Sync](#)
- [14 Setting the Frequency Manually](#)
- [15 Updating Firmware](#)
- [16 Wearing the Bodypack Transmitter](#)
- [17 Specifications](#)
  - [17.1 Input Connector Diagrams](#)
- [18 LICENSING INFORMATION](#)
- [19 Frequently Asked Questions](#)
- [20 Documents / Resources](#)
  - [20.1 References](#)
- [21 Related Posts](#)



## SHURE AD1 Axient Digital Transmitter



### Product Specifications

- **Model:** AD1 Axient Digital Bodypack Transmitter
- **Audio Quality:** Impeccable
- **RF Performance:** High with wide-tuning and encryption
- **Power Options:** AA batteries or SB900A rechargeable battery
- **Connector Options:** TA4 or LEMO3
- **Construction:** Durable metal

### Product Usage Instructions

#### Transmitter Overview:

The AD1 transmitter is designed to deliver impeccable audio quality and RF performance. It features wide-tuning, High Density (HD) mode, and encryption for secure communication.

#### Transmitter Controls:

- **RF Antenna:** For RF signal transmission.
- **Display:** View menu screens and settings. Press any control button to activate the backlight.
- **Infrared (IR) Port:** Align with the receiver IR port during an IR Sync for automated transmitter tuning and setup.

- **Control Buttons:** Use to navigate through parameter menus and change settings.
- **Battery Compartment:** Requires two AA batteries or Shure SB900A rechargeable battery.

## IMPORTANT SAFETY INSTRUCTIONS

1. READ these instructions.
2. KEEP these instructions.
3. HEED all warnings.
4. FOLLOW all instructions.
5. DO NOT use this apparatus near water.
6. CLEAN ONLY with dry cloth.
7. DO NOT block any ventilation openings. Allow sufficient distances for adequate ventilation and install in accordance with the manufacturer's instructions.
8. DO NOT install near any heat sources such as open flames, radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat. Do not place any open flame sources on the product.
9. DO NOT defeat the safety purpose of the polarized or grounding type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wider blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. PROTECT the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. ONLY USE attachments/accessories specified by the manufacturer.
12. USE only with a cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
13. UNPLUG this apparatus during lightning storms or when unused for long periods of time.
14. REFER all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. DO NOT expose the apparatus to dripping and splashing. DO NOT put objects filled with liquids, such as vases, on the apparatus.
16. The MAINS plug or an appliance coupler shall remain readily operable.
17. The airborne noise of the Apparatus does not exceed 70dB (A).
18. Apparatus with CLASS I construction shall be connected to a MAINS socket outlet with a protective earthing connection.
19. To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.
20. Do not attempt to modify this product. Doing so could result in personal injury and/or product failure.
21. Operate this product within its specified operating temperature range.



This symbol indicates that dangerous voltage constituting a risk of electric shock is present within this unit.



This symbol indicates that there are important operating and maintenance instructions in the literature accompanying this unit.

## WARNING

- Battery packs may explode or release toxic materials. Risk of fire or burns. Do not open, crush, modify, disassemble, heat above 140°F (60°C), or incinerate.
- Follow instructions from manufacturer
- Only use Shure charger to recharge Shure rechargeable batteries
- **WARNING:** Danger of explosion if battery incorrectly replaced. Replace only with same or equivalent type.
- Never put batteries in mouth. If swallowed, contact your physician or local poison control center
- Do not short circuit; may cause burns or catch fire
- Do not charge or use battery packs other than Shure rechargeable batteries
- Dispose of battery packs properly. Check with local vendor for proper disposal of used battery packs.
- Batteries (battery pack or batteries installed) shall not be exposed to excessive heat such as sunshine, fire or the like

**WARNING:** Danger of explosion if incorrect battery replaced. Operate only with AA batteries.

**Note:** Use only with the included power supply or a Shure-approved equivalent.

### AD1 Axient Digital Bodypack Transmitter

AD series bodypack transmitters deliver impeccable audio quality and RF performance with wide-tuning, High Density (HD) mode, and encryption. The transmitter features durable metal construction, AA or SB900A rechargeable power (with dockable charging), and TA4 or LEMO3 connector options.

## FEATURES

### Performance

- 20 Hz to 20 kHz range with flat frequency response
- Automatic input staging optimizes gain setting
- AES 256-bit encryption-enabled for secure transmission
- >120 dB dynamic range
- 100 meter (300 feet) line-of-sight operating range
- Selectable modulation modes optimize performance for spectral efficiency
  - Standard – optimal coverage, low latency
  - High density – dramatic increase in max system channel count
- Built-in tone generator and RF markers to facilitate walk-testing
- Switchable Power Levels = 2/10/35 mW (region dependent)
- Frequency Diversity selection using two bodypacks

### Design

- TA4 or LEMO3 audio connector option
- Backlit LCD with easy to navigate menu and controls
- Rugged metal construction
- Flexible ¼ wave antenna
- Menu and power lockout

## Power

- Over 8 hours continuous use with 2 x AA alkaline batteries
- Shure SB900A lithium-ion rechargeable battery provides extended battery life, precision metering, and zero memory effect
- External charging contacts for docked charging

## Included Components

|                           |                  |
|---------------------------|------------------|
| AA alkaline batteries (2) | 80B8201          |
| ¼ wave antenna            | Varies by Region |
| Threaded TAF4 adapter     | WA340            |
| Zipper bag                | 26A13            |
| Belt clip                 | 44A12547         |

## Optional Accessories

|  |             |
|--|-------------|
| Bodypack rechargeable lithium-ion battery        | SB900A      |
| Y-Cable for bodypack transmitters                | AXT652      |
| LEMO Y-cable for bodypack transmitters           | AXT652LEMO3 |
| Instrument cable                                 | WA302       |
| Replacement belt clip                            | 44A12547    |
| Instrument cable with right angle 1/4" connector | WA304       |
| Mute Switch for Bodypack                         | WA661       |
| Mute Switch for 2 Bodypacks                      | WA662       |

## AD1 Transmitter Overview

1. RF Antenna  
For RF signal transmission.
2. Display  
View menu screens and settings. Press any control button to activate the backlight.
3. Infrared (IR) Port  
Align with the receiver IR port during an IR Sync for automated transmitter tuning and setup.
4. Control Buttons  
Use to navigate through parameter menus and to change settings.
5. Battery Compartment  
Requires two AA batteries or Shure SB900A rechargeable battery.
6. AA Battery Adapter

Use to secure AA batteries. Remove when using a Shure SB900A battery.

7. SMA Connector

Connection point for RF antenna.

8. Power Switch

Powers the unit on or off.


9. Power LED

- Green = unit is powered on
- Red = low battery, Mute Mode enabled, input overload, or battery error (see Troubleshooting)

10. Input Jack


Connects to a 4-Pin Mini Connector (TA4F) microphone or instrument cable.

**Note:** A LEMO connector model variation of this transmitter is available.

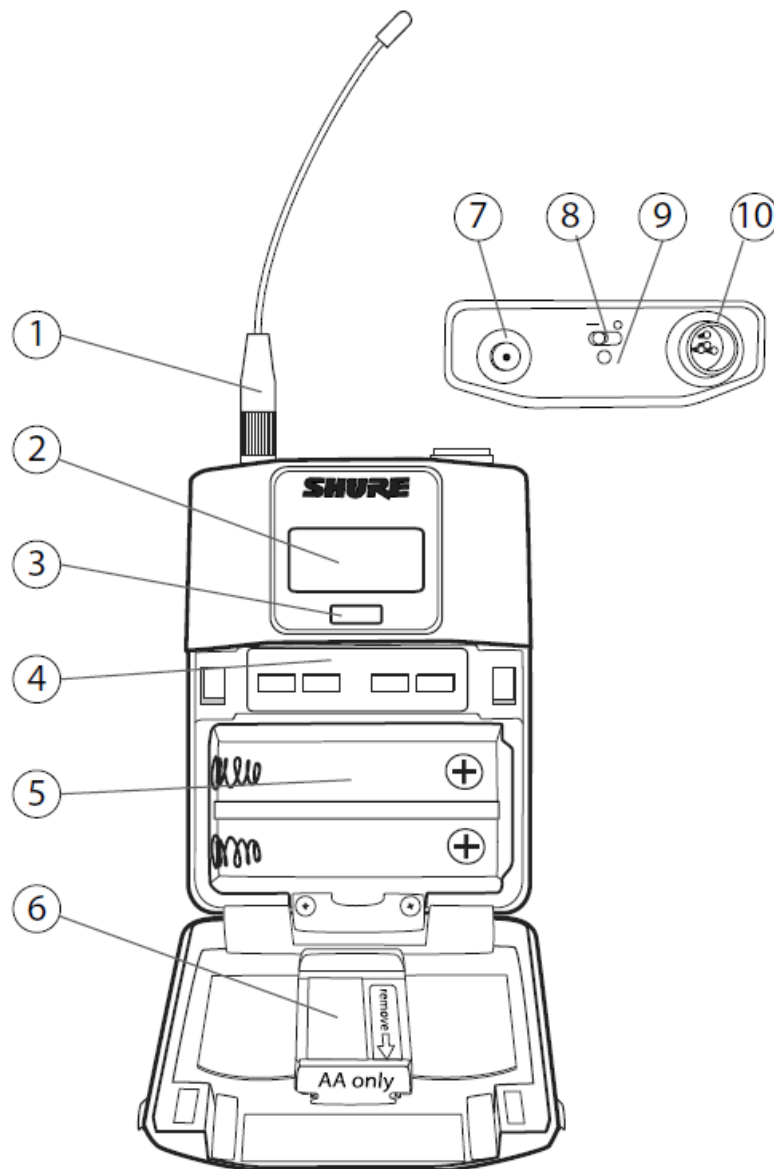

## Transmitter Controls

Use the controls to navigate through parameter menus and change values.

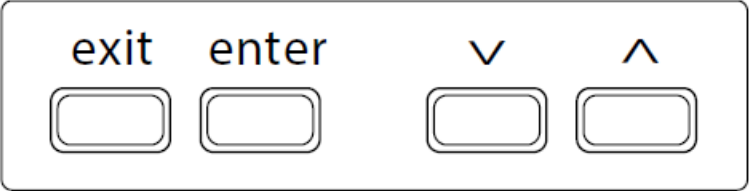

|       |   |
|-------|---|
| exit  | Acts as a 'back' button to return to previous menus or parameters without confirming a value change |
| enter | Enters menu screens and confirms parameter changes  |
| v ^   | Use to scroll through menu screens and to change parameter values                                   |

**Tip:** Use the following shortcuts for quick setup:

- Hold the ^ button while powering on to lock or unlock the transmitter controls.
- Hold the exit button while powering on to enter the Safe Start menu.

**Locking the Interface**

Lock transmitter interface controls to prevent accidental or unauthorized changes to parameters. The lock icon appears on the home screen when the interface lock is enabled.


1. From the Utilities menu, navigate to Locks and select one of the following lock options:
  - None: The controls are unlocked
  - Power: The power switch is locked
  - Menu: The menu parameters are locked
  - All: The power switch and menu parameters are locked
2. Press enter to save.

**Tip:** To quickly unlock a transmitter: Press enter twice, select None, and press enter.

**Home Screen Display**

The home screen shows transmitter information and status. There are four pieces of information that you can choose to see on the home screen. Use the arrow buttons to select one of the following choices:


- Name
- Frequency Setting
- Group (G) and Channel (C)
- Device ID

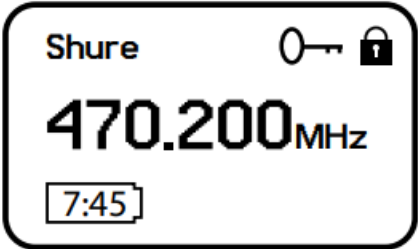

The following icons indicate transmitter settings:

|            |   |
|------------|---|
|            | Battery runtime in hours and minutes or bar display   |
|            | Key: Displayed when encryption is enabled   |
|            | Lock: Displayed when controls are locked. Icon will flash if access is attempted to a locked control (power or menu). |
| <b>STD</b> | STD: Standard Transmission Mode   |
| <b>HD</b>  | HD: High Density Transmission Mode  |
|            | RF Mute Engaged: Displayed when RF output is muted  |

Battery Installation

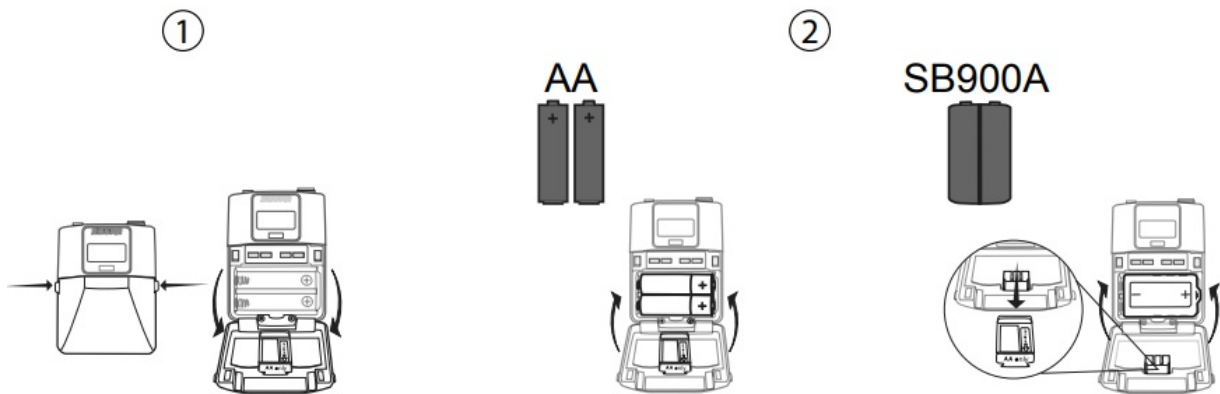

| ① Accessing the Battery Compartment  | ② Installing Batteries   |
|--|--|
| <p>Press the side tabs on the bodypack and open the battery door as shown to access the battery compartment.</p> | <ul style="list-style-type: none"><li>• <b>AA Batteries:</b> Place batteries (note polarity markings) and AA Adaptor as shown and close the door</li><li>• <b>Shure SB900A Battery:</b> Place battery as shown (note polarity markings). Remove the AA adaptor and set it aside. Close the door to secure the battery.</li></ul> <p><b>Note:</b> If using AA batteries, set the battery type using the transmitter menu.</p> |

Setting the AA Battery Type

To ensure accurate display of transmitter runtime, set the battery type in the transmitter menu to match the installed AA battery type.


**Note:** If a Shure SB900A rechargeable battery is installed, selecting a battery type is not necessary and the battery type will display Shure.

1. Navigate to the Utilities and select Battery.
2. Use the ▼ ▲ buttons to select the installed battery type:




- Alkaline = Alkaline
- NiMH = Nickel Metal Hydride
- Lithium = Lithium Primary

3. Press enter to save.

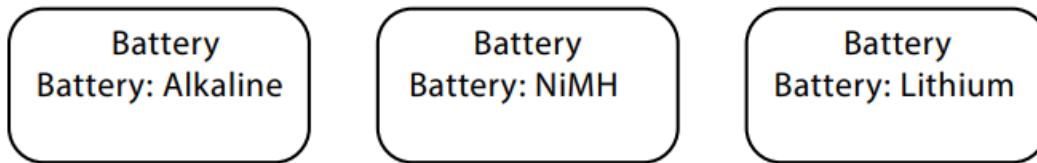

### AA Battery Installation

Fully insert the batteries as shown to ensure proper battery contact and to allow the door to latch securely.

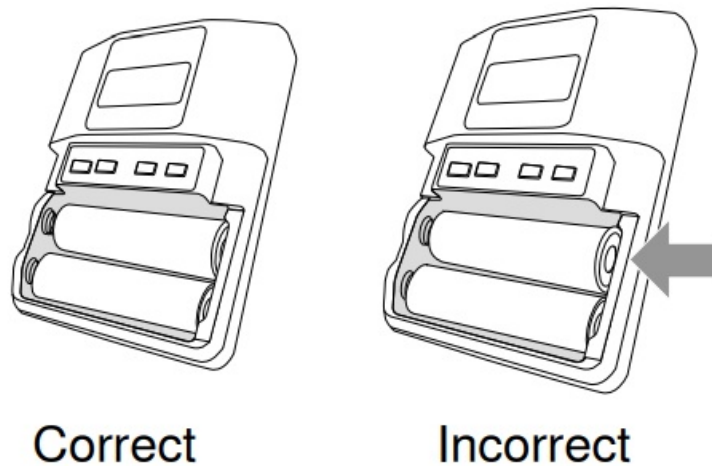

### Shure SB900A Rechargeable Battery

Shure SB900A lithium-ion batteries offer a rechargeable option for powering the transmitters. Batteries quickly charge to 50% capacity in one hour and reach full charge within three hours. Single chargers and multiple bay chargers are available to recharge the Shure batteries.

**Caution:** Only charge Shure rechargeable batteries with a Shure battery charger.

### Shure SB900A Runtime

|               |               |               |
|---------------|---------------|---------------|
| 2 mW          | 10 mW         | 35 mW         |
| Up to 9 hours | Up to 9 hours | Up to 5 hours |


### Checking Battery Info

When using a Shure rechargeable battery, the receiver and transmitter home screens display the number of hours and minutes remaining.

Detailed information for the battery is displayed Battery menu of the transmitter: Utilities > Battery

- **Battery:** The chemistry type of for the installed battery (Shure,Alkaline, Lithium, NiMH)

- **Bars:** Indicates the number of bars displayed
- **Time:** Battery runtime
- **Charge:** Percentage of charge capacity
- **Health:** Percentage of current battery health
- **Cycle Count:** Total of the number of charging cycles for the installed battery
- **Temperature:** Battery temperature reported in Celsius and Fahrenheit

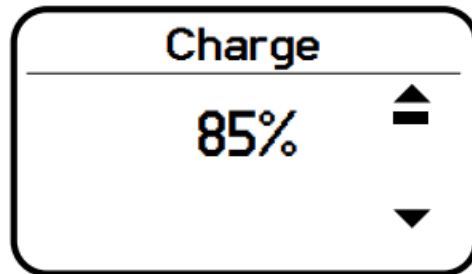

## Important Tips for Care and Storage of Shure

### Rechargeable Batteries

Proper care and storage of Shure batteries results in reliable performance and ensures a long lifetime.

- Always store batteries and transmitters at room temperature
- Ideally, batteries should be charged to approximately 40% of capacity for long-term storage
- Periodically clean the battery contacts with alcohol to maintain ideal contact
- During storage, check batteries every 6 months and recharge to 40% of capacity as needed

For additional rechargeable battery information, visit [www.shure.com](http://www.shure.com).

### AA Batteries and Transmitter Runtime

Transmitters are compatible with the following AA battery types:

- Alkaline
- Nickel Metal Hydride (NiMH)
- Lithium Primary







A 5-segment battery indicator representing the charge level of the transmitter battery is displayed on the screens of the transmitter and receiver.

The following tables contain the approximate remaining transmitter runtime in hours:minutes.







**Note:** Battery runtimes vary by manufacturer, battery age, and environmental conditions.

### AA Batteries and Transmitter Runtime







#### Alkaline

| Battery Indicator   | Approximate Runtime Remaining<br>(hours:minutes) |
|---|--|
|  | 8:00 - 6:00                                      |
|  | > 4:00   |
|  | > 1:45   |
|  | ≅ 1:45   |
|  | ≅ 0:45   |
|  | ≅ 0:15   |

#### NiMH (2700 mAh)

| Battery Indicator   | Approximate Runtime Remaining<br>(hours:minutes) |
|---|--|
|    | 11:00 - 8:00                                     |
|  | > 5:00   |
|  | > 2:00   |
|  | ≅ 2:00   |
|  | ≅ 0:45   |
|  | ≅ 0:15   |

#### Lithium Primary (3500 mAh)


| Battery Indicator   | Approximate Runtime Remaining<br>(hours:minutes) |
|---|--|
|  | 14:00 - 10:00                                    |
|  | > 6:00   |
|  | > 2:00   |
|  | ≅ 2:00   |
|  | ≅ 0:45   |
|  | ≅ 0:15   |

## Menu Parameters

The Main menu organizes the available transmitter parameters into three sub-menus:

- Radio
- Audio
- Utilities


**Tip:** Use the arrow buttons to scroll between the sub-menus.

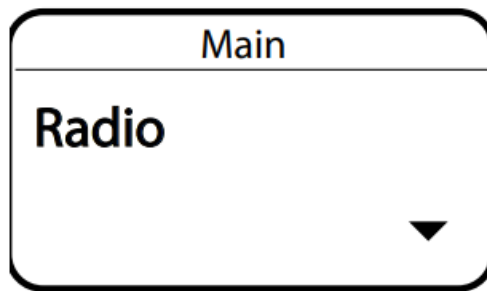

### Tips for Editing Menu Parameters

- To access the menu options from the home screen, press the enter button. Use the arrow buttons to access additional menus and parameters.
- A menu parameter will blink when editing is enabled
- To increase, decrease or change a parameter, use the arrow buttons
- To save a menu change, press enter
- To exit a menu without saving a change, press exit

## Menu Map

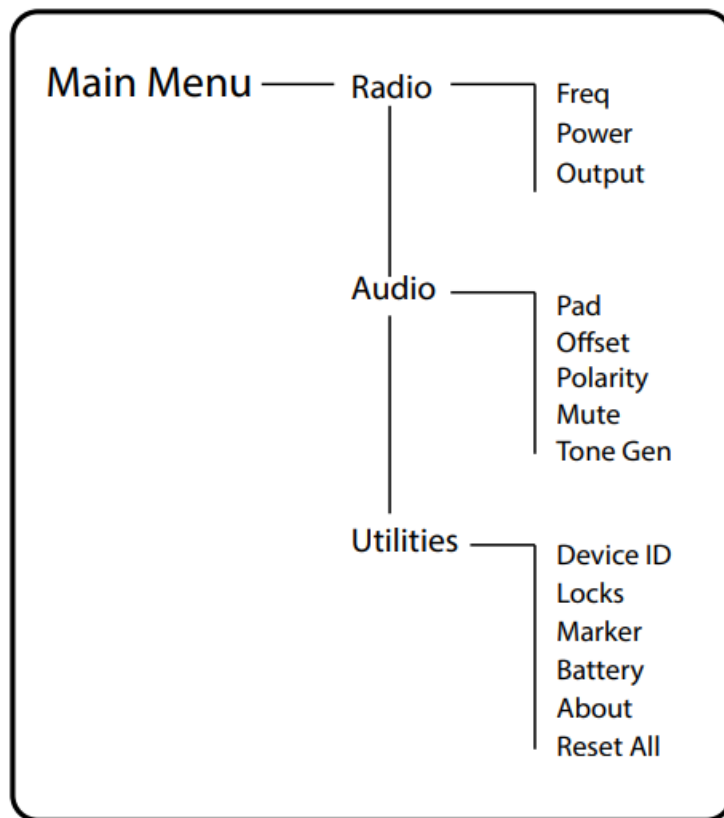

## Menu Parameter Descriptions

### Radio Menu

#### Freq

Press the enter button to enable editing of a group (G:) channel (C:) or frequency (MHz). Use the arrow buttons to adjust the values. To edit the frequency, press the enter button once to edit the first 3 digits, or twice to edit the second 3 digits.

#### Power

Higher RF power settings can extend the range of the transmitter.

**Note:** Higher RF power settings decrease battery runtime.

#### Output

Sets the RF output to On or Mute.

- **On:** RF signal is active
- **Mute:** RF signal is inactive

### Audio Menu

#### Pad

Adjust the pad to avoid overloading the audio input. Select -12 dB or Off.

#### Offset

Adjust Offset level to balance mic levels when using two transmitters or when assigning multiple transmitters to receiver slots. Adjustment range: -12 dB to +21 dB.

#### Polarity

Selectable polarity assignment for the audio input connector:

- **Pos:** Positive pressure on microphone diaphragm produces positive voltage on pin 2 (with respect to pin 3 of XLR output) and the tip of the TRS output.
- **Neg:** Positive pressure on microphone diaphragm produces negative voltage on pin 2 (with respect to pin 3 of XLR output) and the tip of the TRS output.

## Mute

When enabled, the power switch is configured as a mute switch for the audio:

- **Power switch on:** Audio signal on
  - **Power switch off:** Audio signal muted
- Exit mute mode to return the power switch to its normal functionality.

## Tone Gen

Transmitter will generate a continuous test tone:

- **Freq:** The tone can be set to 400 Hz or 1000 Hz.
- **Level:** Adjusts the output level of the test tone.

## Utilities Menu

### Device ID

Assign a device ID of up to 9 letters or numbers.

### Locks

Locks the transmitter controls and power switch.

- **None:** The controls are unlocked
- **Power:** The power switch is locked
- **Menu:** The menu parameters are locked
- **All:** The power switch and menu parameters are locked

### Marker

When enabled, press the enter button to drop a marker in Wireless Workbench.

### Battery

Displays battery information:

- **Battery Life:** Runtime reported in bar display and time (hours:minutes)
- **Charge:** Percentage of charge capacity
- **Health:** Percentage of current battery health
- **Cycle Count:** Total of the number of charging cycles for the installed battery
- **Temperature:** Battery temperature reported in Celsius and Fahrenheit

### About

Displays the following transmitter information:

- **Model:** Displays the model number
- **Band:** Displays the tuning band of the transmitter
- **FW Version:** Installed firmware
- **HW Version:** Hardware version
- **Serial Num:** Serial number

### Reset All


Restores all transmitter parameters to factory settings.

### IR Sync

Use IR Sync to form an audio channel between the transmitter and receiver.

**Note:** The receiver band must match the band of the transmitter.

1. Select a receiver channel.
2. Tune the channel to an available frequency using group scan or manually turn to an open frequency.
3. Power on the transmitter.
4. Press the SYNC button on the receiver.
5. Align the IR windows between the transmitter and the receiver so that the IR LED illuminates red. When complete, Sync Success! appears. The transmitter and receiver are now tuned to the same frequency.

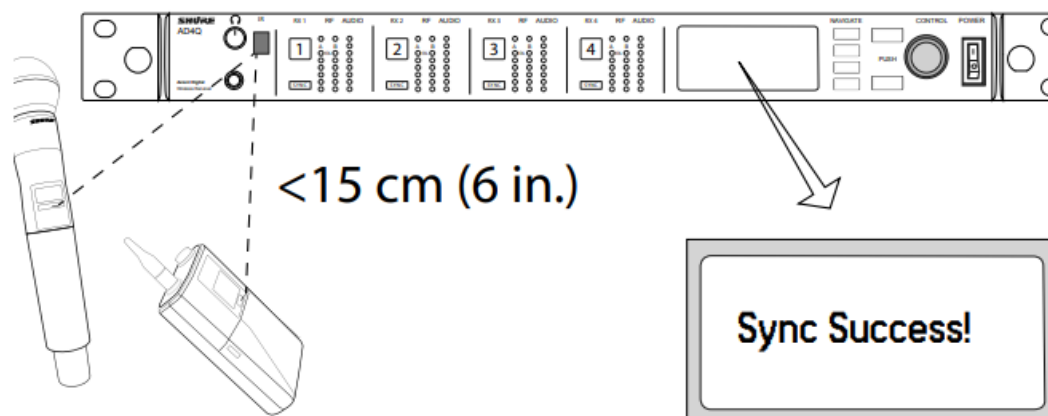


### Note:

Any change to the encryption status on the receiver (enabling/disabling encryption) requires a sync to send the settings to the transmitter. New encryption keys for the transmitter and receiver channel are generated on every IR sync, so to request a new key for a transmitter, perform an IR sync with the desired receiver channel.

### Setting the Frequency Manually

The transmitter can be manually tuned to a specific group, channel, or frequency.

1. Navigate to the Radio menu and select Freq.
2. Scroll to select G: and C: to edit the group and channel, or select the frequency parameter (MHz). When editing the frequency, press enter once to edit the first 3 digits, or twice to edit the last 3 digits.
3. Use the  $\wedge$   $\vee$  buttons to adjust the group, channel, or frequency.
4. Press enter to save, and then press exit when finished.

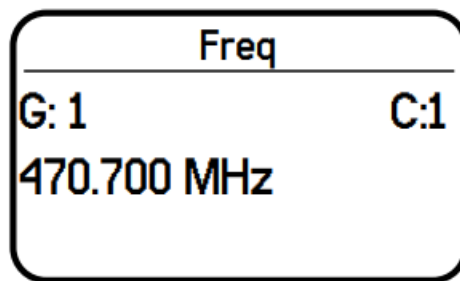

## Updating Firmware

Firmware is embedded software in each component that controls functionality.

Periodically, new versions of firmware are developed to incorporate additional features and enhancements. To take advantage of design improvements, you can upload and install new versions of the firmware by using the Shure Update Utility. The Shure Update Utility is available for download from <http://www.shure.com/>.

### Firmware Versioning

When performing an update, first download firmware to the receiver, and then update transmitters to the same firmware version to ensure consistent operation.

The firmware numbering for Shure devices uses the following format:

MAJOR.MINOR.PATCH (e.g., 1.2.14). At a minimum, all devices on the network (including transmitters), must have the same MAJOR and MINOR firmware version numbers (e.g., 1.2.x).

## Updating the Transmitter


1. Download the firmware to the receiver.
2. Access the following menu from the receiver:  
Device Configuration > Tx Firmware Update.
3. Align the IR ports between the transmitter and the receiver.  
IR ports must be aligned for the entire download, which can take 50 seconds or longer.  
**Tip:** The red alignment LED will turn on when the alignment is correct.
4. Press ENTER on the receiver to begin the download to the transmitter.  
The receiver will display the progress of the update as a percentage.

## Wearing the Bodypack Transmitter

Clip the transmitter to a belt or slide a guitar strap through the transmitter clip as shown. For best results, the belt should be pressed against the base of the clip.


**Tip:** The clip can be removed and rotated 180 degrees to increase mounting options.



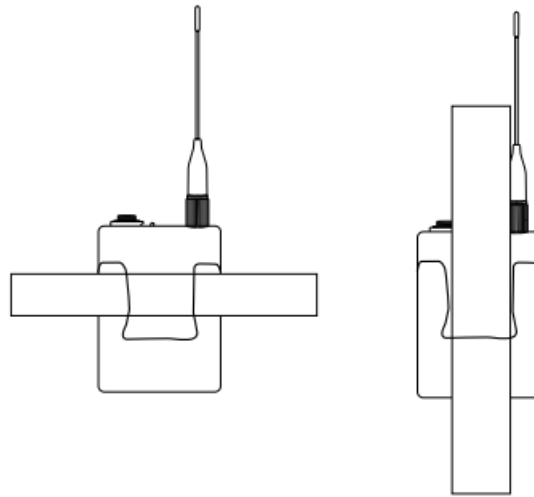

### RF Mute

RF Mute prevents transmission of the audio by suppressing the RF signal while allowing the transmitter to remain on. The home screen displays RF MUTED in this mode.

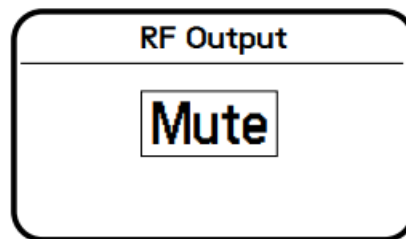


1. From the Radio menu, navigate to Output.
2. Choose one of the following options:
  - **On:** RF signal is active
  - **Mute:** RF signal is disabled
3. Press enter to save.

Turning the transmitter off and on or replacing the battery will restore Output to On.

### Safe Start

Power on in Safe Start mode to prevent interference with other devices.  
Hold the exit button while powering on your device until the Safe Start menu appears.

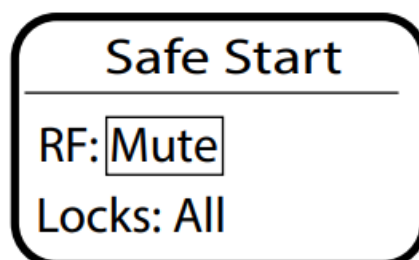

### Safe Start menu options:

- **RF:** Mute or On
- **Locks:** None, Pwr, Menu, All

Use the navigation buttons to make changes.


**Tip:** To exit the Safe Start menu, cycle the power or momentarily remove the battery.

**Note:** Previous settings for locks and RF will be retained when the transmitter is powered on in Safe Start.

### Input Overload

The OVERLOAD message appears when the audio input experiences a high-level signal. The power LED turns red as an additional indicator of an overload. Reduce the input signal or enable the input pad to remove the overload condition.


**Tip:** To enable the input pad, navigate to Audio > Pad and select -12 dB.

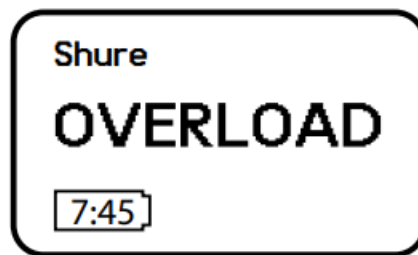

### Matching Audio Levels with Offset

When linking two or more transmitters to a receiver, there may be a difference in volume levels between microphones or instruments. If this occurs, use the Offset function to match the audio levels and eliminate audible volume differences between transmitters. If using a single transmitter, set Offset to 0 dB.

1. Turn on the first transmitter and perform a sound check to test the audio level. Turn off the transmitter when finished.
2. Turn on the second transmitter and perform a sound check to test the audio level. Repeat for any additional transmitters.
3. If there is an audible difference in the sound level between the transmitters, navigate to the Offset menu (Audio > Offset) in the transmitter to increase or decrease the Offset in realtime to match the audio levels

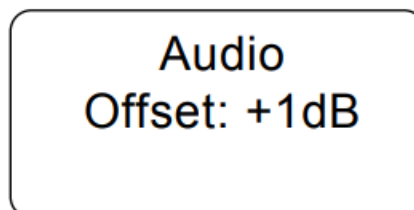


### Tone Generator

The transmitter contains an internal tone generator that produces a continuous audio signal. The tone is helpful when conducting a sound check or for troubleshooting the audio signal chain. The level of the tone is adjustable from -60 dB to 0 dB and the frequency can be set to 400 Hz or 1000 Hz.

**Tip:** Always start with the level set to -60 dB to avoid overloading speakers or headphones.

1. From the Audio menu select Tone Gen.
2. Set the frequency to 400 Hz or 1000 Hz.
3. Select Level and use the arrow buttons adjust the value between -60 dB and 0 dB.

Turn off the tone by selecting Off from the menu or by cycling the transmitter power.

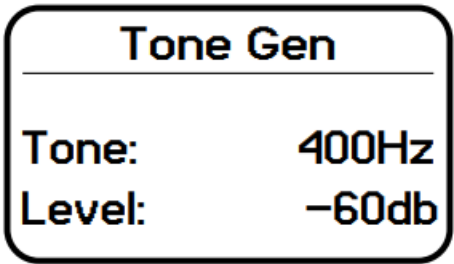

**Specifications**

**Mic Offset Range**

-12 to 21 dB (in 1 dB steps)

**Battery Type**

Shure SB900A Rechargeable Li-Ion or LR6 AA batteries 1.5 V

**Battery Runtime**

@ 10 mW

|              |               |
|--------------|---------------|
| Shure SB900A | up to 9 hours |
| alkaline     | up to 8 hours |

See Battery Runtime Chart

**Dimensions**

86 mm x 66 mm x 23 mm (3.4 in. x 2.6 in. x 0.9 in.) H x W x D

**Weight**

155 g (5.0 oz.), without batteries

**Housing**

Cast Metal

**Operating Temperature Range**

-18°C (0°F) to 50°C (122°F)

**Note:** Battery characteristics may limit this range.

**Storage Temperature Range**

-29°C (-20°F) to 74°C (165°F)

**Note:** Battery characteristics may limit this range.

**Audio Input**

**Connector**

4-Pin male mini connector (TA4M) or Lemo Connector

**Configuration**

Unbalanced

**Impedance**

|                                  |                |
|----------------------------------|----------------|
| 4-Pin male mini connector (TA4M) | 910 k $\Omega$ |
| Lemo Connector                   | 8.2 k $\Omega$ |

**Maximum Input Level**

1 kHz at 1% THD

|         |                   |
|---------|-------------------|
| Pad Off | 8.5 dBV (7.5 Vpp) |
| Pad On  | 20.5 dBV (30 Vpp) |

**Preamplifier Equivalent Input Noise (EIN)**

System Gain Setting  $\geq +20$   
-120 dBV, A-weighted, typical

**RF Output****Connector**

SMA

**Antenna Type**

1/4 wave

**Impedance**

50  $\Omega$

**Occupied Bandwidth**

<200 kHz

**Channel-to-Channel Spacing**

|                   |         |
|-------------------|---------|
| Standard Mode     | 350 kHz |
| High Density Mode | 125 kHz |

varies by region

**Modulation Type**



Shure Axient Digital Proprietary

**Power**

2 mW, 10 mW, 35 mW

See Frequency Range and Output Power table, varies by region

Input Connector Diagrams

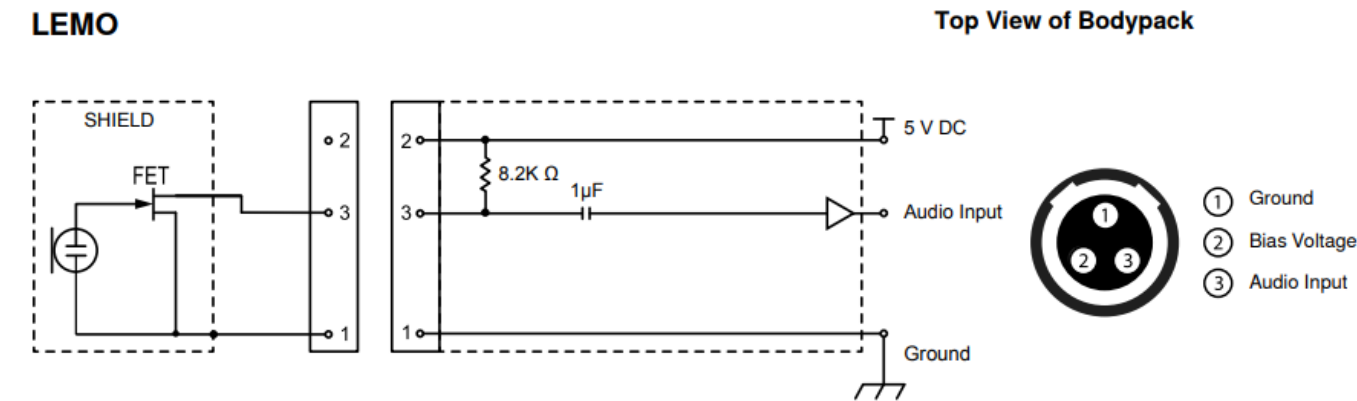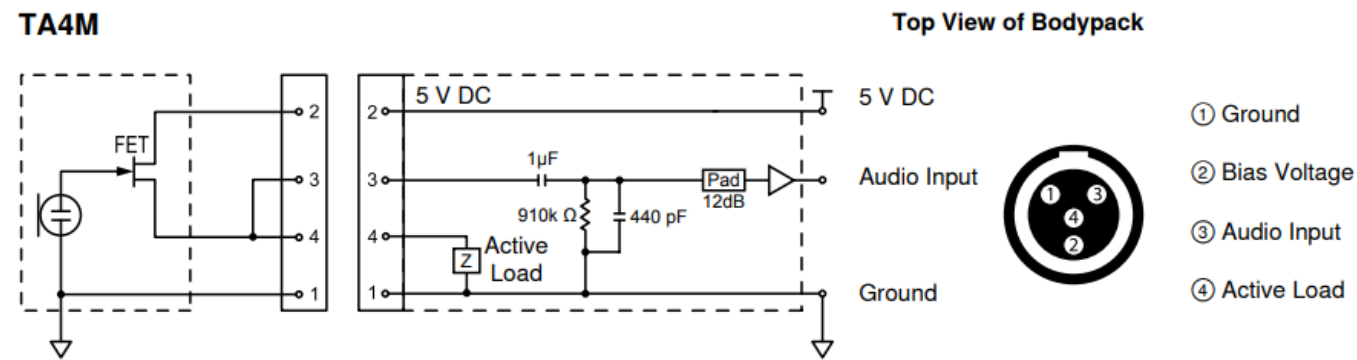

Frequency Bands and Transmitter RF Power

| Band  | Frequency Range (MHz) | RF Power (mW)*** |
|-------|-----------------------|------------------|
| G53   | 470 to 510            | 2/10/35          |
| G54   | 479 to 565            | 2/10/20          |
| G55†  | 470 to 636*           | 2/10/35          |
| G56   | 470 to 636            | 2/10/35          |
| G57   | 470 to 616*           | 2/10/35          |
| G62   | 510 to 530            | 2/10/35          |
| H54   | 520 to 636            | 2/10/35          |
| K53   | 606 to 698*           | 2/10/35          |
| K54△  | 606 to 663**          | 2/10/35          |
| K55   | 606 to 694            | 2/10/35          |
| K56 ◇ | 606 to 714            | 2/10/35          |
| K57△  | 606 to 790            | 2/10/35          |
| K58   | 622 to 698            | 2/10/35          |
| L54   | 630 to 787            | 2/10/35          |
| R52   | 794 to 806            | 10               |
| JB    | 806 to 810            | 2/10             |
| X51   | 925 to 937.5          | 2/10             |
| X55   | 941 to 960            | 2/10/35          |

- with a gap between 608 to 614 MHz.
- with a gap between 608 to 614 MHz and a gap between 616 to 653 MHz.
- power delivered to the antenna port.

†operation mode varies according to region. In Brazil, High Density mode is used.

△Output power limited to 10 mW above 608 MHz.

◇ Korea defines power as conducted (ERP) which is 1dB less than declared in table.

## LICENSING INFORMATION

Licensing: A ministerial license to operate this equipment may be required in certain areas. Consult your national authority for possible requirements. Changes or modifications not expressly approved by Shure Incorporated could void your authority to operate the equipment. Licensing of Shure wireless microphone equipment is the user's responsibility, and licensability depends on the user's classification and application, and on the selected frequency. Shure strongly urges the user to contact the appropriate telecommunications authority concerning proper licensing, and before choosing and ordering frequencies.

### Australia Warning for Wireless

This device operates under an ACMA class licence and must comply with all the conditions of that licence including operating frequencies. Before 31 December 2014, this device will comply if it is operated in the 520-820 MHz frequency band.

**WARNING:** After 31 December 2014, in order to comply, this device must not be operated in the 694-820 MHz band.

## Certifications

Certified under FCC Part 15 and FCC Part 74.

Certified in Canada to RSS-210.

FCC ID: DD4AD1G55, DD4AD1G57, DD4AD1K53, DD4AD1K54, DD4AD1X55. IC: 616A-AD1G55, 616A-AD1K53.

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation of this device is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Meets essential requirements of the following European Directives:

- WEEE Directive 2002/96/EC, as amended by 2008/34/EC
- RoHS Directive 2011/65/EU

**Note:** Please follow your regional recycling scheme for batteries and electronic waste. This product meets the Essential Requirements of all relevant European directives and is eligible for CE marking.

Hereby, Shure Incorporated declares that the radio equipment is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

<http://www.shure.com/europe/compliance>

## Authorized European representative:

### Shure Europe GmbH

Headquarters Europe, Middle East & Africa

- Department: EMEA Approval  
Jakob-Dieffenbacher-Str. 12 75031 Eppingen, Germany
- Phone: +49-7262-92 49 0
- Fax: +49-7262-92 49 11 4
- Email: [EMEAsupport@shure.de](mailto:EMEAsupport@shure.de)

## Information to the user

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

### Canada Warning for Wireless

This device operates on a no-protection, no-interference basis. Should the user seek to obtain protection from other radio services operating in the same TV bands, a radio licence is required. For further details, consult Innovation, Science and Economic Development Canada's document Client Procedures Circular CPC-2-1-28, Voluntary Licensing of Licence-Exempt Low-Power Radio Apparatus in the TV Bands.

This device operates on frequencies shared with other devices. Consult the Federal Communications Commission White Space Database

Administration website to determine available channels in your area prior to operation.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation of this device is subject to the following two conditions:

(1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

## Frequently Asked Questions

### Q: What type of batteries does the AD1 transmitter use?

**A:** The AD1 transmitter can use either two AA batteries or the Shure SB900A rechargeable battery for power.

### Q: How do I sync the AD1 transmitter with a receiver?

**A:** Use the Infrared (IR) Port on the transmitter to align with the receiver IR port during an IR Sync for automated tuning and setup.

### Q: Can I use the AD1 transmitter with instruments?

**A:** Yes, the transmitter supports instrument connections with options like the Instrument cable and LEMO Y-cable for bodypack transmitters.

## Documents / Resources



### [SHURE AD1 Axient Digital Transmitter](#) [pdf] User Guide

K54, DD4AD1K54, AD1 Axient Digital Transmitter, AD1, Axient Digital Transmitter, Digital Transmitter, Transmitter

## References

- [User Manual](#)

### [Manuals+ Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.