




# SHUTTLE SPCEL02 Industrial Edge Computer Owner's Manual

[Home](#) » [Shuttle](#) » SHUTTLE SPCEL02 Industrial Edge Computer Owner's Manual 

## *Shuttle*<sup>®</sup> EDGE PC Barebone SPCEL02 PRODUCT SPECIFICATIONS

### Contents

- [1 ROBUST INDUSTRY PC WITH VESA/DIN-RAIL MOUNT](#)
- [2 Front and Back Panel](#)
- [3 REQUIRED COMPONENTS](#)
- [4 ACCESSORIES INCLUDED](#)
- [5 OPTIONAL ACCESSORIES FROM SHUTTLE](#)
- [6 SHUTTLE EDGE PC BAREBONE SPCEL02 — SPECIFICATIONS](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)

### ROBUST INDUSTRY PC WITH VESA/DIN-RAIL MOUNT

The Shuttle Edge PC SPCEL02 is a fanless IPC barebone in a robust 450 ml metal chassis and intended for DIN-Rail or VESA mounting. It is flexible in use and designed for maintenance-free 24/7 operation at ambient temperatures of up to 40°C. Inside there is an Intel Celeron “Elkhart Lake” processor with slots for RAM module, M.2 SSD card and WLAN card. The small housing offers an amazing variety of connections, including dual LAN, COM port and Digital I/O. This product is targeted at professional applications such as edge computing (IoT gateway), automation, digital signage, control, data logging and video surveillance.



## INDUSTRIAL DESIGN

- Rugged aluminum chassis (blue-green)
- Weight: 970/1200 g net/gross
- Dimensions: 120 x 75 x 51 mm (WDH), 450 ml
- Mounting: VESA (100×100 & 50×50 mm) & DIN Rail
- Supports 24/7 Nonstop Operation
- Operating temperature: 0 ... 40°C (20-80% RH, non-condensing)

## OPERATING SYSTEM

- An operating system is not included
- Supports Windows 10, Windows 11 and Linux (all 64-bit)

## PROCESSOR

- Intel Celeron J6412 “Elkhart Lake”, 4-core, 2.0~2.6 GHz, TDP: 10 W
- Soldered System-on-Chip processor (SoC)
- Passive Cooling

## MEMORY/STORAGE/M.2 slots

- One 260-pin SO-DIMM slot supports up to 32GB DDR4-3200 RAM
- One M.2-2242/2280 M slot supports M.2-SSDs with SATA interface
- One M.2-2230 E slot supports M.2 WLAN modules with 2 ext. antennas

**Note:** If a M.2 WLAN module is installed, then the M.2-SSD card is limited to M.2-2242 format

## CONNECTORS

- 1x HDMI 2.0b
- 2x USB 3.2 Gen2 Type A
- 1x USB 2.0 Type A
- 2x 2.5G RJ45 LAN-Ports (Intel 226V)
- Digital Input/Output (4+4)
- 1x COM (RS232/422/485)
- DC Input
- Power Button
- Power LED

## DC INPUT

- DC-Input supports 12-24V DC wide range voltage (the power source used should support at least 65W output wattage)
- 3-pin terminal connector with terminal block – the third pin “IGN” acts as input for the car ignition lock which enables delayed on/off switching of the Edge PC

- Adapter cable for external power adapter included (supports 5.5/2.5 mm DC plug), Note: the power adapter is not included

## **OTHER**

- Hardware TPM 2.0 module Infineon SLB9670VQ2
- EMC certifications: CE, FCC Class A, VCCI
- Safety certifications: CB/IEC62368-1:2014/2018, cTUVus/UL623681:2019
- Other: RoHS, EN 50155 OT1, EN 50121-3-2, MIL-STD-810G
- Warning of hot surface: risk of burns!

## **OPTIONAL SHUTTLE ACCESSORIES**

- WLAN kit with Intel AX200 module supports WiFi 6 and Bluetooth 5.2, including two 10-cm antenna cables and two external antennas
- Additional 2.5" bay for SATA drive (SSD or HDD)
- Power Adapter 90W / 19V with 5.5/2.5 mm DC plug

## **MODELS OF THE SPCELxx/SPCNVxx EDGE PC SERIES**

Product UPC-Code	PoE Function	Operating Temperature	SoC Processor (soldered)	Front I/O	Rear I/O	Mounting	DC-Input
SPCEL02 8879930072 12	—	0 ... 40 °C	Intel Celeron J6412 (4-core, 2.0-2.6 GHz, 10 W)	1x HDMI 2.0 , 2x USB 3.2, 1x USB 2.0 2x 2.5G LAN	COM (RS232/422/485)D IO: 4x in, 4x out	VESA mount & DIN-Rail	12-24 V DC Power adapter not included
SPCEL02P Coming Soon	PoE(PD) 1)						
SPCEL03 8879930072 29	—	-20 ... 60 °C 2)	Intel Atom x6413E (4-core, 1.5-3.0 GHz, 9 W)				
SPCEL12 8879930072 43	—	0 ... 40 °C	Intel Celeron J6412 (4-core, 2.0-2.6 GHz, 10 W)	2x HDMI 2.0 , 1x DP 2x USB 3.2, USB 2.0 2.5G LAN	2.5G LAN, 2x Audio Nano SIM (opt. 4G) Micro-SD card reader	VESA mount	12-20 V DC Power adapter is included
SPCNV03 Coming Soon	—	-20 ... 55 °C 1)	NVIDIA Jetson Orin Nano 8 GB RAM, 40 TOPS AI-Perf.	1x HDMI 1.4b, 2x USB 3.2, 1x USB 2.0 2.5G+1G LAN	COM (RS232/422/485)D IO: 4x in, 4x out	VESA mount & DIN-Rail	12-24 V DC Power adapter not included
SPCNV13 Coming Soon			NVIDIA Jetson Orin NX (w. fan) 16 GB RAM, 100 TOPS AI-Perf.				

1) SPCEL02P: The PoE feature allows this Edge PC to be powered over the LAN cable and thus it becomes a "Powered Device" (PD).

2) SPCEL03: at ambient temperatures >40°C, the RAM memory module and SSD card must support the extended temperature range (-40...+85 °C)

## Front and Back Panel



1. HDMI 2.0b port

2. 2.5G LAN port (RJ45, Intel 226V)
3. 2x USB 3.2 Gen 2 port (Type-A)
4. 2.5G LAN port (RJ45, Intel 226V)
5. 3-pin DC-in connector supports 12-24V DC \*)
6. LED indicator for power state
7. USB 2.0 (Type A)
8. Power button

\*) DC connector: In this photo the supplied pluggable terminal block is already installed. It uses screw terminals to clamp connecting wires (–/+ ) coming from the power source. The third pin “IGN” acts as input for the car ignition lock which enables delayed on/off switching of the Edge PC.



*Photo with optional WLAN kit*


9. 2x perforation for external WLAN antenna
10. COM port supports RS232/RS422/RS485
11. Digital I/O (4x Input, 4x Output)

Bottom side



12. Four rubber feet

13. Rating label

 **Warning** of hot surface: risk of burns!






## REQUIRED COMPONENTS

The following components need to be added to make it a fully-configured Edge PC




**Shuttle Edge PC Barebone SPCEL02**





	<p><b>Memory Module (RAM)</b> Supports one SO-DIMM memory module (260-pin) DDR4-3200, max. 32 GB</p>
<p>M.2-2242 L: 42 mm</p>  <p>M.2-2280 L: 80 mm</p> 	<p><b>M.2 SSD card (SATA)</b> supports one M.2-2242 SSD card with SATA interface (not PCIe/ NVMe) Note: A longer M.2-2280 card is also supported, if no WLAN module is installed.</p>
	<p><b>Power Source</b> DC input supports 12-24 V DC The power source should support ≥65W As a power source, use e.g. a DIN Rail power supply, a car battery, or a standard power adapter with a 2.5/5.5 mm DC-plug.</p>
	<p><b>Operating System</b> Windows 10/11 or Linux (64-bit only)</p>

## ACCESSORIES INCLUDED

	<p><b>DIN-Rail clip</b> The clip can be mounted on the underside of the Edge PC . The Edge PC can then be mounted on a standard 35 mm DIN-Rail, e.g. inside equipment racks. <b>Note:</b> The black mounting plate also supports 50×50 mm VESA mounting.</p>
	<p><b>VESA Mount</b> Supports 100×100 mm VESA mounting</p>
 <p>Adapter cable supports 2.5/5.5 mm DC-plug</p>	<p><b>DC-Input connector including cable adapter</b> The pluggable terminal block uses screw terminals to clamp connecting wires (-/+) coming from the power source. You can use the supplied adapter cable to connect a standard power adapter with a 2.5/5.5 mm DC-plug.</p>

## OPTIONAL ACCESSORIES FROM SHUTTLE

	<p>WLAN Kit WLN-M3 Wi-Fi 6 WLAN card including two external antennas. Note: If a WLAN module is installed, then the M.2-SSD card is limited to M.2-2242 format (with 42 mm length).</p>
	<p>Power Adapter PE90 Input: 100-240 VAC, 50-60Hz AC-Plug: angled Schuko plug (3-pin with earthing contact) Output: 19 VDC, max. 90W DC-Plug: 5.5/2.5 mm</p>
	<p>2.5" bay for storage drive (coming soon) Additional drive bay is attached to the Edge PC and supports one 2.5" hard disk or SSD drive with SATA interface</p>

## SHUTTLE EDGE PC BAREBONE SPCEL02 — SPECIFICATIONS

FANLESS AND SILENT	<p>Completely fanless, virtually noiseless Large aluminium heatsink Passive cooling through convective heat transfer Ideal for noise-sensitive environments Fanless means less dust inside the case and thus virtually no maintenance required.</p>
24/7 NONSTOP OPERATION	<p>This device is approved for 24/7 permanent operation.</p>
CHASSIS	<p>Rugged chassis made of aluminium Colour: turquoise (blue-green) Dimensions: 120 x 75 x 51 mm (WxDxH) , 460 ml (Height: ca. 53 mm including rubber feet) Weight: 720/970 g net (without/with accessories) and 1.2 kg gross</p>
OPERATION POSITIONS	<p>1) Mounted on a DIN-Rail, e.g. inside equipment racks 2) Vertical, e.g. VESA-mounted behind an appropriate monitor (supports 50×50 and 100×100 mm VESA standard) 3) Standing on its rubber feet like a desktop PC</p>
OPERATING SYSTEM	<p>This system comes without operating system. It is compatible with: – Windows 10/11 (64-bit) – Linux (64-bit)</p>



PROCESSOR	<p>Intel® Celeron® Prozessor J6412, Quad Core  CPU clock frequency: 2.0 GHz, max. Turbo frequency: 2.6 GHz  Code name: "Elkhart Lake"  10 nm process, FCBGA1493 package (soldered)  CPU cores / Threads: 4 / 4  L2 Cache: 1.5 MB  Thermal Design Power (TDP): 10 W  System-on-Chip processor (SoC) with integrated graphics processor, no additional chipset required</p>
PROCESSOR COOLING	Fanless cooling system with passive heat sink, virtually noiseless
INTEGRATED GRAPHICS	<p>The Graphics Processing Unit (GPU) is integrated in the processor.  Intel® UHD Graphics (Intel Gen 10), graphics frequency: 400~800 MHz  Execution Units (EU): 16, Shader: 128  Max. Shared Memory (graphics memory): 8 GB  Supports DirectX 12, Intel Quick Sync Video, Shared Memory  Codec Support in Hardware: h265 (8-/10-bit), h264, VP8, VP9, AVC (only decoding: AV1, VC-1)</p>
UEFI FIRMWARE	<p>16 MB Flash ROM with AMI UEFI BIOS Firmware  Based on the Unified Extensible Firmware Interface (UEFI)  Supports Wake-on-LAN (WOL) from S3, S4, S5 ACPI states  Supports boot up from external flash memory cards (USB or SD card)  Hardware TPM v2.0: Infineon SLB9670VQ2</p>
MEMORY SUPPORT	<p>1x SO-DIMM slots with 260 pins  Supports DDR4-3200 (PC4-25600) SDRAM at 1.2V  Supports one RAM module with max. 32 GB capacity  Supports one unbuffered DIMM module (no ECC)</p>
M.2 SLOT FOR SSD CARDS	<ul style="list-style-type: none"> <li>– M.2-2242/2280 slot with SATA interface</li> <li>– supports SSD cards in M.2-2242 format (length: 42 mm)</li> <li>– only supports SSD cards in M.2-2280 format (length: 80 mm) if no WLAN card is installed</li> <li>– only supports SSD cards with SATA interface (not PCIe/NVMe)</li> </ul>
M.2-2230 SLOT FOR WLAN CARDS	<p>Interfaces: PCI-Express X1 and USB 2.0  Supports M.2 cards with a width of 22 mm and a length of 30 mm (type 2230)  Supports WLAN expansion cards (optional Shuttle accessory: WLN-M3)  Note: If a M.2 WLAN module is installed, then the M.2-SSD card is limited to M.2-2242 format with 42 mm length</p>
DUAL 2.5G LAN	<p>Dual network with two RJ45 ports with two status LEDs each  Used network chips: 2x Intel i226-V Ethernet Controller (PCIe)  Supports 100 / 1.000 / 2.500 MBit/s operation  Supports WAKE ON LAN (WOL)  Supports network boot by Preboot eXecution Environment (PXE)</p>
FRONT PANEL CONNECTORS	<ul style="list-style-type: none"> <li>– Power Button</li> <li>– Power LED</li> <li>– HDMI 2.0b digital video and audio output</li> <li>– 2x USB 3.2 Gen 2 Type A (max. 10 Gbps)</li> <li>– USB 2.0 Type A</li> <li>– 2x 2.5G network port (LAN, RJ45)</li> <li>– DC input supports 12-24 V (3-pin Euroblock) [2]</li> </ul>
BACK PANEL CONNECTORS	<ul style="list-style-type: none"> <li>– Serial Port supports RS232/422/485 (D-Sub)</li> <li>– Digital I/O ports (2x5-pin connector with 4 inputs and 4 outputs) [1] – 2x perforated 6.5 mm holes for optional WLAN antennas</li> <li>DC Input</li> </ul>

DC-INPUT CONNECTOR	<p>DC-Input connector (3-pin Euroblock) supports a wide voltage range: 12-24V DC. Required output wattage of the power source: =65 W</p> <p>The pin "IGN" acts as input for the car ignition lock which enables delayed on/off switching of the Edge PC.</p> <p>The supplied adapter cable supports standard power adapters with 5.5 / 2.5 mm DC plug.</p> <p>A power adapter is not included in the scope of delivery. For further information see [2]</p>
SUPPLIED ACCESSORIES	<ul style="list-style-type: none"> <li>– Multi-language user guide (EN, DE, FR, ES, JP, RU, SC, TC)</li> <li>– Driver DVD (Windows 11, 64-bit)</li> <li>– Bracket #1 supports 100 x 100 mm VESA mounting standard</li> <li>– Bracket #2 supports 50 x 50 mm VESA mounting standard</li> <li>– DIN-Rail Clip for 35-mm DIN-Rail mounting (in combination with bracket #2)</li> <li>– Seven screws M3 x 6 mm (5x black and 2x silver)</li> <li>– Two thermal pads for a single-side or double-side RAM module</li> <li>– 3-pin Phoenix connector for the DC-input port</li> <li>– DC adapter cable (connects the Phoenix connector to a 2.5 / 5.5 mm coaxial DC plug of a power adapter)</li> </ul> <p>Note: A power adapter is not included in the scope of delivery.</p>
OPTIONAL ACCESSORIES	<p>1) WLN-M3: WLAN kit including Wi-Fi 6 card (M.2-2230), 2x antenna cable (10 cm), 2x external antennas</p> <p>2) PE90: Power Adapter (19V / 90W)</p> <p>3) Coming soon: additional 2.5" bay for a hard disk or SSD with SATA interface</p>
ENVIRONMENTAL SPECIFICATIONS	<p>Operating temperature range: 0 – 40 °C (32 – 104 °F)</p> <p>Relative humidity range: 20 – 80 % (non-condensing)</p> <p>Warning: Never touch the heatsink during or just after operation, as it can get very hot during normal operation. Be sure to wait for the heatsink to cool off before touching it.</p>
CERTIFICATIONS / COMPLIANCE	<p>EMI: CE, FCC Class A, VCCI</p> <p>Safety: CB/IEC62368-1:2014/2018, cTUVus/UL62368-1:2019</p> <p>Other: RoHS, Energy Star, ErP, RoHS, EN 50155 OT1, EN 50121-3-2, MIL-STD-810G</p> <p>This device is classed as a technical information equipment (ITE) in class B and is intended for use in living room and office. The CE-mark approves the conformity by the EU directives:</p> <p>(1) 2014/30/EU relating to electromagnetic compatibility (EMC)</p> <p>(2) 2014/35/EU relating to Electrical Equipment designed for use within certain voltage limits (LVD)</p> <p>(3) 2009/125/EC relating to eco design requirements for energy-related products (ErP)</p>

#### Footnotes:

**[1] The Digital I/O connection (DIO)** with 2x5 pins has 4 inputs and 4 outputs for digital signals in addition to the ground (C = Common).

Technical features

– Isolation Voltage: 2500 Vrms

4x Digital Outputs:

– Voltage Rating: 0...30 V (Open collector, pull-up)

– Output Current: max. 30 mA

4x Digital Inputs:

– Logical 0: 0-3 V or close to ground


– Logical 1: 5-30V or open

Please contact Shuttle Support Hotline for further questions: [support@shuttle.eu](mailto:support@shuttle.eu)

**[2] The DC input connector** is designed as a 3-pin Euroblock with pluggable terminal block which uses screw terminals to clamp connecting wires (-/+) coming from the power source. The permissible input voltage range is

12-24 V and the power source should support an output wattage of at least 65 W. You can use the supplied adapter cable to connect a standard power adapter with a 2.5/5.5 mm DC-plug, such as the Shuttle accessory PE90.

The third pin “IGN” acts as input for the car ignition lock which enables delayed on/off switching of the Edge PC.

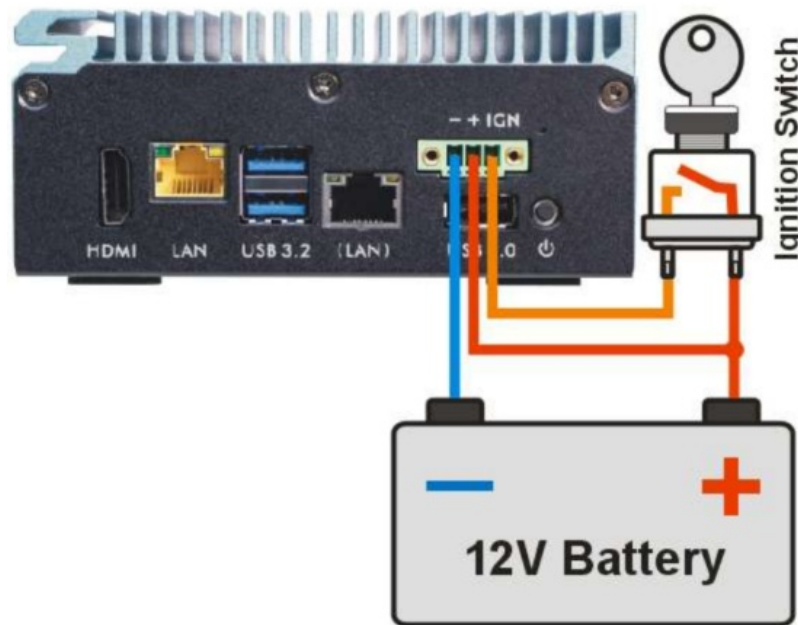

The switch-on delay (0, 5, 10, 30, 60 sec.) and switch-off delay (0, 1, 3, 5, 10, 30, 60, 90, 120, 240, 360 min.) can be set in the BIOS setup under the “NVR Power Delay” menu item on the “Advanced” tab. You can enter the BIOS setup program by pressing the “Del” key shortly after switching on the PC.



© 2024 Shuttle® Computer Handels-GmbH — All information subject to change without notice. Optional components and accessories are not included. Pictures for illustration purposes only.

**Shuttle Computer Handels GmbH**  
**Fritz-Strassmann-Str. 5**  
**25337 Elmshorn**  
**Germany**

**Tel. +49 (0) 4121-47 68 60**


**Fax +49 (0) 4121-47 69 00**

[sales@shuttle.eu](mailto:sales@shuttle.eu)

[WWW.SHUTTLE.EU](http://WWW.SHUTTLE.EU)



**Documents / Resources**



[SHUTTLE SPCEL02 Industrial Edge Computer](#) [pdf] Owner's Manual  
SPCEL02 Industrial Edge Computer, SPCEL02, Industrial Edge Computer, Edge Computer, Computer

References

- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.