

SiFENE AMR512S Compact Centrifugal Juicer Extractor User Manual

Home » SiFENE » SiFENE AMR512S Compact Centrifugal Juicer Extractor User Manual

SiFENE AMR512S Compact Centrifugal Juicer Extractor User Manual



Contents

- 1 Product Specification
- 2 Precautions For Safe Use
- 3 What's included
- 4 Use Of Product
- **5 Operating Instructions**
- **6 Maintenance**
- 7 Fault Analysis and

Elimination

- 8 High Yield Fruit & Veges
- 9 Important Information
- 10 Warranty
- 11 Documents / Resources
 - 11.1 References
- **12 Related Posts**

Product Specification

• Model: AMR512S

Rated voltage: 120V-

Rated power: 350W

• Rated frequency: 60HZ

• Continual juicing time: ≤2 MIN.

• Time interval: 22 MIN.

• Net weight: 3.74LB

• Unit size(D*W*H): 8.94 6.69 11.42 IN

Precautions For Safe Use

- Make sure the product has an input voltage of 120V-60Hz before use.
- Disconnect the power supply before dismantling, assembling or adjusting any part.
- The product has Y type connection. If your power cord is damaged, please email us at support@sifene.com
 for o replacement.
- Before use, check whether any parts such as the power cable or the plug is damaged and, if it is, stop using the product and contact our customer service department promptly
- If product maintenance is necessary after use, contact our customer service department directly. It is dangerous to dismantle the product by yourself.
- Before connecting the power supply, make sure the detach able parts such as the juice strainer and the top cover are all properly installed:
- When the product is running, never put hands or sharp articles into its feed opening, replace the pushing rod with any object, or have eyes close to the feed opening as this may cause accidents to happen.
- Keep the juice strainer and motor wheels away from the opera- tor's body and other hard foreign matters when the product is running to avoid personal injuries and product damage.
- Turn off and unplug the appliance before using, assembling, removing parts, and cleaning. When unplugging,
 pull it from the socket by holding it instead of pulling it out through the power cord
- · After juicing, do not dismantle the detachable parts of the prod- uct until the motor and the juice strainer have

both stopped and the power supply has been disconnected.

- Operate with the rated operating time strictly: Juice continually for 1 minute each time at most. After end of any function above, stop for 2 minutes to end a cyde. Stop for 15 to 20minutes after 3 successive cycles and start again after the motor has cooled down. This practice can prolong life of the product.
- The juicer stops during juicing may be caused by the overheating protection of the motor. Please turn "0" and unplug, then wait for 3 minutes and restart it again
- To avoid deformation and damage caused by heat, do not disin- fect any accessories in hot water above 176 or microwave overs. Parts of the juicer in contact with food materials should be clean, hygienic, reliable and in compliance with relevant food hygiene certification.
- Do not place main unit of the product into water or other liquids, or flush out with water or other liquids (it can be wiped with a soft cloth).
- Do not clean the product with steel wool, abrasive cleansers, or corrosive liquids (such as gasoline or acetone).
- Put the product in a place out of reach of children. Use or play of the product by persons with disabled limbs, sensory or mental disorders, or by persons without relevant experience or knowl- edge (including children) is forbidden.
- Do not process any fruits or vegetables with cores, hard seeds or shells or thick skins until their cores, hard seeds or shells or thick skins have been removed.
- This product is suitable for individuals or families only.

What's included



- 2. Juicer cover
- 3. Juice strainer
- 4. Middle ring
- 5. Juice Flowing Nozzle
- 6. Interlocking safety arm
- 7. Motor base
- 8. Knob switch.
- 9. Pulp container
- 10. Brush

Use Of Product

The product is designed with a dual-action safety system and can only run after all parts are correctly installed. Install and use the product following the steps below.

Step 1Install middle ring on the body. Proper installation is required



Step 2 Insert the juice strainer into the middle ring and attach it to the motor wheel.



Step 3
Install the pulp collector.



Step 4Put the juicer cover right above on the body and properly install it as per the direction indicated on the header.



Step 5Put the pulling rod inside the two grooves of the header until completely in place, or the product will not work normally



Step 6 Complete



Operating Instructions



Clean the parts in contact with food materials thoroughly before using the product for the first time (see the content of "Maintenance")

- P: The fastest speed, reach maximum speed instantly and recover after release.
- **0:** For stopping
- **1:** A low-speed gear for processing soft fruits and vegetables such as watermelon, tomato, cucumber and strawberry.
- 2: A high-speed gear for processing all fruits and vegetables (see "Juicer Recipe" for the selection of fruits, vegetables and gears)

Maintenance

- 1. Make the power switch off before cleaning the product.
- 2. Clean the product promptly after use.
- Exterior of main unit of the product may be wiped with a wet cloth.
 Do not place the main unit of the product into water or other liquids, or flush it with water or other liquids.
- 4. Put the product in a dry place without direct ultraviolet rays.
- 5. Make sure the product is dean and dry before keeping it.
- 6. Clean the detachable parts following the steps below

Step 1 Take down the pushing rod.



Step 2Pull open the interlocking safety arm from right direction and fake off the juicer cover.



Step 3Remove the middle ring. Note: The juicer strainer can be only remove after middle ring removed from motor base.



Step 4Clean with water the pulp container, middle ring, juicing screen, and juice cup succes- sively.




Fault Analysis and Elimination

Fault	Possible couse	Elimination
After the power supply is connected and the switch is turned on, the product does not run.	 The middle ring is not correctly installed The top cover is nat correctly installed. The top cover contact has fractured 	 Install the middle ring correctly. Install the top cover correctly. Replace the top cover.
There is a bad smell from the motor the first few times using the product .	It is normal.	Fthe bad smell still exists after the product has been used several time s, contact us customer service
The product stops automatically while in use.	 The voltage is too low There are too many food materia Is in the product. The pushing rod is pushed too vi olently. The motor is under temperature protection 	 Check whether the voltage is too low. Disconnect the power supply an d remove the surplus food mater ials. Gently push the pushing rod Please turn "O and unplug, then wait for 2-5 minutes and restart i t again.
There is a lot of residues in juice	 The juice strainer is damaged. There is a lot of residues in the middle ring 	 Replace the juice strain- er. Clean the middle ring
The product has abnormal vibratio n or big noise.	 The juice strainer is not correctly installed. resulting in poor runnin g balance. The product is not steadily p lac ed or the foot pad has fallen off. The voltage is too high. There are m any food materi- ols in the product 	 Install the juice strainer correctly. Place the product steadily or inst all the foot pad correctly. Check whether the voltage is too high. Disconnect the power supply and remove the surplus food materials
There is very little juice.	 There are too many residue in the e middle ring The pushing rod is pushed too violently 	 Clean the middle ring Gently push the pushing rod,

The cutter holder is seized.	The cutter holder is wound or seize d by food materials	Disconnect the power supply, take out the food materials and cut them into smaller blocks.
Juicer smells like it's burning.	 The juicer motor is designed wit h Automatic Overload Protectio n to protect itself from overheating If the motor should overheat, it may emit a burning smell. 	 Turn the power off for up to 3 minutes, allowing the machine to cool down or reset. Juicing in smaller batches using a more gentle pressure to push produce down the chute in order to protect the motor

High Yield Fruit & Veges

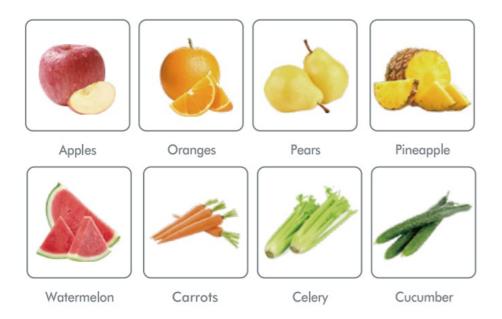

Important Information

- Using high juice yield fruit for a better juicing outcome (Refer to Quick Start Guide and User Manual
- The juicer motor is designed with Automatic Overload Protection to protect itself from overheating. If the motor should overheat, it may emit a burning smell If this occurs, turn the power off for up to 2 minutes, allowing the machine to cool down or reset.

Warranty



2-4 Years Limited Warranty

Motor: 4-year warranty.

Normal accessories: 2-year warranty.

With lifelong technical support and 24/7 customer service

Your purchase comes with o 100% satisfaction guarantee from SIFENE

SIFENE supports free replacement for any problems or refund for any dissatisfaction under warranty. We will take care of all quali- ty-related issues with a replacement or full refund including any return shipping costs. If your product is defective and under warranty, please contact us at Email: support@sifene.com

More SIFENE Products

If you're happy with this juicer, the line doesn't stop here. Check out https://sifene.com/ for a line of all our beautiful and thoughtfully designed appliances. They might be right at home in your kitchen, too!

NEED HELP? CONTACT US!

CUSTOMER SUPPORT

Email: support@sifene.com
Web: https://sifene.com/



Documents / Resources





<u>SiFENE AMR512S Compact Centrifugal Juicer Extractor</u> [pdf] User Manual AMR512S Compact Centrifugal Juicer Extractor, AMR512S, Compact Centrifugal Juicer Extractor, Centrifugal Juicer Extractor, Extractor

References

User Manual

Manuals+