

 **nuova
SIMONELLI®**
**v3 Flow Gateway
Original Cable**



Simonelli v3 Flow Gateway Original Cable Instructions

[Home](#) » [Simonelli](#) » Simonelli v3 Flow Gateway Original Cable Instructions 

Contents

- [1 Simonelli v3 Flow Gateway Original Cable](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Introduction](#)
- [5 Quick Start installation procedure](#)
- [6 Prerequisite site requirements](#)
- [7 Safety instructions](#)
- [8 Equipment required](#)
- [9 Installation procedure](#)
- [10 Appendix](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)
- [12 Related Posts](#)

 **nuova
SIMONELLI®**

Simonelli v3 Flow Gateway Original Cable



Product Information

Specifications:

- Compatible with Simonelli and Sanremo espresso machines
- Internet of Things (IoT) device for real-time visibility of espresso production parameters
- Cloud-based data transmission for processing and analysis
- Includes Flow Gateway, Flow Gateway power supply, and flow meter cable(s)
- **Tools required:** Cable ties, high-strength double-sided foam tape, tools for accessing espresso machine covers

Product Usage Instructions

Quick Start Installation Procedure:

1. Connect the flow meter cable(s) to the espresso machine flow meters, marking the end of each cable for identification
2. Mount the Flow Gateway near the espresso machine
3. Route and secure the flow meter cable(s) to the Flow Gateway
4. Connect the Flow Gateway to power
5. Set up the Internet connection for data transmission
6. Confirm proper operation of the Flow Gateway
7. Installation is complete!

Prerequisite Site Requirements:

- Ensure safety precautions are followed
- Meet mounting requirements to avoid exposure to heat, water, or steam

Installation Procedure:

1. **Connect the flow meter cable(s) to the espresso machine flow meters:**

1. Disconnect the espresso machine's plug connector from the flow meter terminals
2. Connect the female connector on the flow gateway cable to the flow meter terminals
3. Connect the corresponding male connector on the flow gateway cable to the coffee machine's flow meter connector

2. Mount the Flow Gateway:

1. Locate the Flow Gateway in a suitable location near the espresso machine
2. If needed, secure it using the provided din rail and black mounting bracket with high-strength foam tape

FAQ:

Q: What do I do if there is an unused connection on the flow meter cable?

A: If there is a spare connector, connect the spare male and female plugs and secure the cable out of the way.

Introduction

- Flow integrates with a range of commercial espresso machines, providing cloud-based and real-time visibility of espresso production parameters.
- It achieves this via an Internet of Things (IoT) device installed near the espresso machine which collects the signal from the espresso machine's built-in flow meters then transmits this data to the cloud for processing and analysis.

Quick Start installation procedure

Flow Gateway installer

1. Connect the flow meter cable(s) to the espresso machine flow meters (mark the end of the cable connected to group 1/2 so you know which cable is which when you plug them into the Flow Gateway)
2. Mount the Flow Gateway
3. Route the flow meter cable(s) to the Flow Gateway and secure the cable
4. Connect the Flow Gateway power
5. Setup the Internet connection
6. Confirm the Flow Gateway operation
7. Installation complete!

Prerequisite site requirements

- Please ensure your site meets all the [Flow Gateway V3 Networking Requirements](#)
- Corporate Wi-Fi network which is accessible from the location of the espresso machine
- A suitable mounting location for the Flow Gateway near the espresso machine (usually under the counter)
- **Nb.** The supplied flow meter cable is 3 meters long, so depending on the routing of the cable within the espresso machine, this allows for installing the Flow Gateway approximately 1.5-2 meters away from the espresso machine
- AC power outlets near the location of the espresso machine (usually under the counter):
- **Nb.** The Flow Gateway power supply cable is 1.5 meters long

Error loading the extension!

Safety instructions

- The Flow Gateway must be installed by a technician with the appropriate levels of certification to perform work inside of a commercial espresso machine.
- The maximum ambient temperature that the Flow Gateway is designed to operate in is 40°C (104°F). Ensure it is installed in a location where the ambient temperature does not exceed this.
- Do not open the Flow Gateway, there are no serviceable parts inside. For all hardware faults return the Flow Gateway to a Flow Coffee authorised distributor.

Mounting requirements

- Locate the Flow Gateway in a location that will not be affected by excessive heat, and where it will not come into direct contact with water or steam.
- If the Flow Gateway is located where it may be disturbed, or if it is installed on the wall or underside of a counter, secure the Flow Gateway using the supplied din-rail and black mounting bracket that screws to the back of the Flow unit. Fix the din-rail to the desired mounting location using high-strength double-sided foam tape (eg. 3M VHB Double Sided Foam Adhesive). Then clip the unit(now fitted with the black mounting clip) to the din-rail.
- The Flow Gateway is not suitable for mounting on the underside of overhead kitchen cabinets (where it may be exposed to steam or excessive heat from equipment on the countertop below it).

Error loading the extension!

Equipment required

Equipment required (per espresso machine)

- 1x Flow Gateway



- 1x Flow Gateway power supply



- 1x or 2x Two group head flow meter cable
 - Cable which connects the Flow Gateway to the espresso machine's flow meters.
 - One cable is required for a 1-2 group head machine, and two cables for a 3-4 group head machine.



Tools and consumables

- Cable ties
- High-strength double-sided foam tape – eg. 3M VHB Double Sided Foam Adhesive
- Tools for removing the appropriate covers from the espresso machine to access the flow meters

Error loading the extension!

Installation procedure


Connect the flow meter cable(s) to the espresso machine flowmeters

The espresso machine has a flow meter per group head. The flow meter cable has a female and male plug per group head to allow it to connect in parallel with the espresso machine's connection.

For each flow meter

1. Disconnect the espresso machine's plug connector from the flow meter terminals.
2. Connect the female connector on the flow gateway cable to the flow meter terminals.
3. Connect the corresponding male connector on the flow gateway cable to the coffee machine's flow meter

connector.

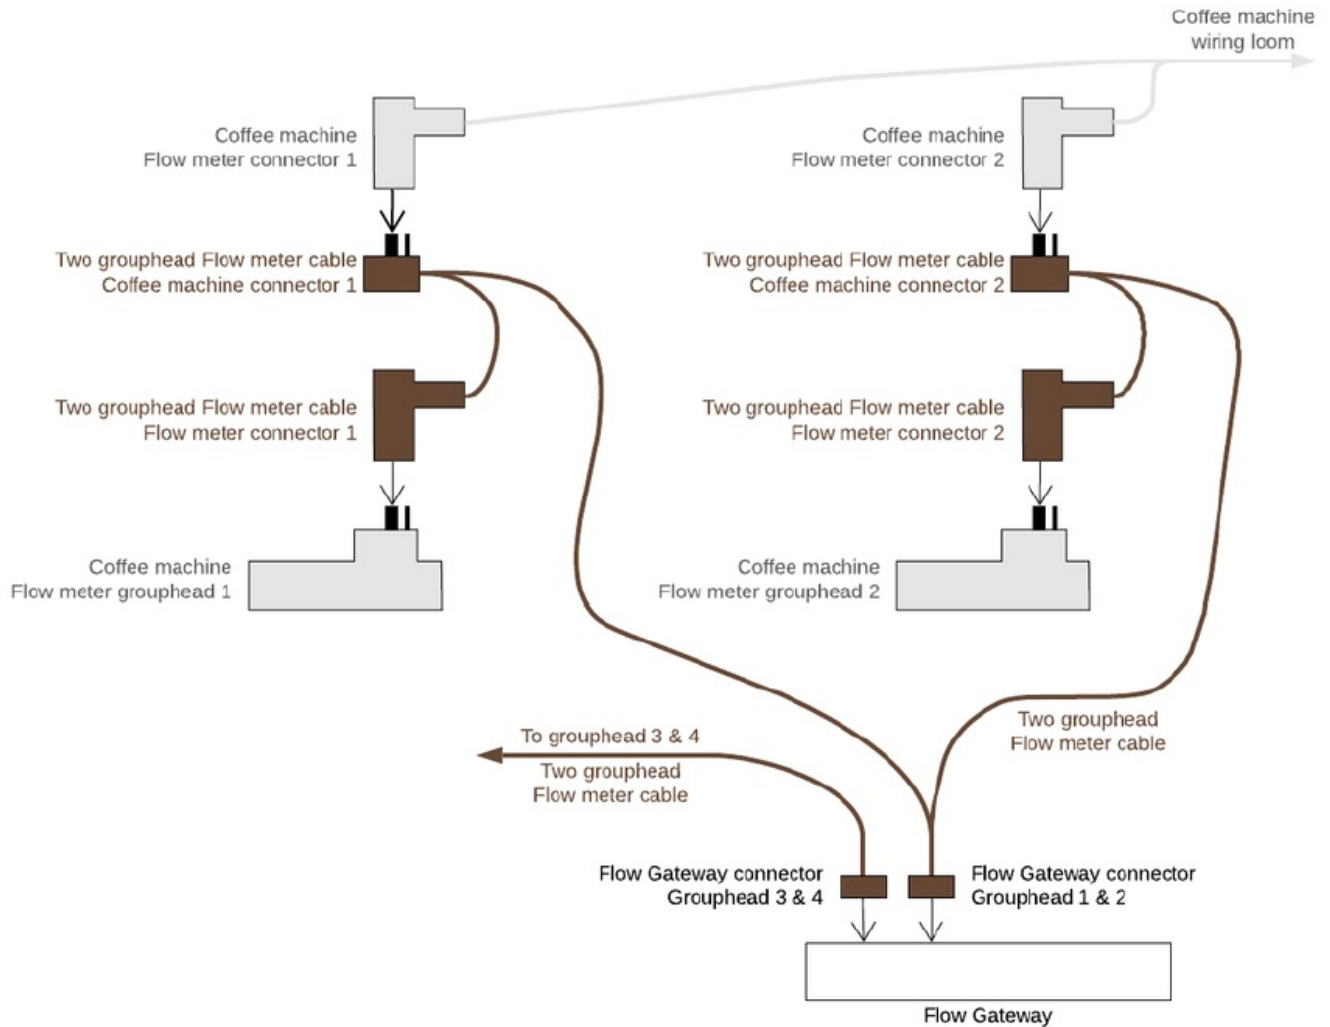

Unused connection

If there is a spare connector on the flow meter cable after all group heads have been connected (ie. when two cables are used for a 3-group head espresso machine), connect the spare male and female plugs then secure the cable out of the way.



Mount the Flow Gateway

1. Locate the Flow Gateway near the espresso machine in a location that will not be affected by excessive heat, and where it will not come into direct contact with water or steam (usually under the counter is the most appropriate location). Ensure the chosen location is within reach of the flow meter cable and AC power outlets.
2. If the Flow Gateway is located where it may be disturbed, or if it is installed on the wall or underside of a counter, secure the Flow Gateway using the supplied din rail and black mounting bracket that screws to the back of the Flow unit. Fix the din-rail to the desired mounting location using high-strength double-sided foam tape (eg. 3M VHB Double Sided Foam Adhesive). Then clip the unit(now fitted with the black mounting clip) to the din-rail.

Route the flow meter cable(s) to the Flow Gateway and secure the cable

1. Route the cable(s) through the service hole in the bottom of the espresso machine then to where the Flow Gateway will be located.
2. Secure the cable(s) inside the espresso machine so that cannot touch any hot components like water piping or the boiler, and so that it cannot be dislodged if it is pulled from outside of the espresso machine.
3. Plug the flow meter cable(s) into the Flow Gateway (take note of which cable is connected to groupheads 1/2 and which cable is connected to groupheads 3/4. Plug into the corresponding ports on the Flow Gateway).

Connect the Flow Gateway power

1. Install the Flow Gateway power supply, secure the cable, and press the power button. NB: not to be confused with the reset button.
2. The screen will illuminate when the power has been turned on.

Setup the Internet connection

1. Install the 'ESP BLE Provisioning' app on your mobile phone.




ESP BLE Provisioning
Utilities

• **Google Play Store:** [ESP BLE Provisioning - Apps on Google Play](#)

• **Apple App Store:** [ESP BLE Provisioning](#)

2. Turn on the Flow gateway device.

3. The screen is a touch screen. Slide your finger across the screen from right to left, until the screen shows 'begin device provisioning'.



4. Click on 'Begin Device Provisioning'. A QR Code will appear on the screen.

5. Open the ESP Provisioning App, click on Provision Device, and scan the QR Code on the Flow Gateway.

Available connections will appear on the screen, and you need to click on the appropriate network you want to connect to.

6. At this point, you will be asked for the password for the wifi network. Enter the password and click 'provision'.

7. you will see that the gateway is connected to the WiFi network when the device rolls back to the home screen and displays 'Flow Cloud Online' as per below.



Confirm the Flow Gateway operation

Run each group head on the espresso machine, ensuring that the correct group head indicator number on the screen of the Flow Gateway illuminates green while the group head is running.



IT IS EXTREMELY IMPORTANT TO MAKE SURE YOU HAVE THE POWER PACK PLUGGED INTO THE FLOW DEVICE. The flow device has a battery back up which allows you to power up the device and configure it without plugging the power cord into the device. If you do not plug the power pack into the device, the battery will drain within a couple of hours and then power down. It is essential to check this before the completion of the installation.

Installation complete!
Error loading the extension!


Appendix

Network connectivity troubleshooting

Qr Code scan fails.

The QR code can be light-sensitive. If the App is having trouble scanning the QR code, hold the unit in a slightly darker environment e.g under the bench.

Documents / Resources

| | |
|--|--|
|  | <p>Simonelli v3 Flow Gateway Original Cable [pdf] Instructions</p> <p>v3 Flow Gateway Original Cable, v3 Flow, Gateway Original Cable, Original Cable, Cable</p> |
|--|--|

References

- [✖ Confluence](#)
- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.