



KLEPS 2
Clamp
Type Test
Probe



SKS KLEPS 2 Clamp Type Test Probe Owner's Manual

[Home](#) » [SKS](#) » SKS KLEPS 2 Clamp Type Test Probe Owner's Manual 

Contents

- [1 SKS KLEPS 2 Clamp Type Test Probe](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 FAQs](#)
- [5 Product](#)
- [6 drawing](#)
- [7 technical data](#)
- [8 CONTACT INFORMATION](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)



SKS KLEPS 2 Clamp Type Test Probe



Product Information

Specifications:

- **Product:** KLEPS 2 Clamp-type Test Probe
- **Connection:** Solder connection
- **Rated Voltage Measurement Cat.:** 30 VAC / 60 VDC O (2)
- **Rated Current:** 6 A
- **Housing Material:** PA
- **Inflammability Class:** V-2 (UL 94)
- **Clamp Type:** Contact hook, gold plated
- **Clamping Range:** Up to 2 mm

Product Usage Instructions

1. Preparation:

Ensure the actuator button is removed before soldering. Identify the cable to be connected.

2. Soldering:

Solder the cable to the solder connection point on the miniature clamp-type test probe.

3. Cable Connection:

Once soldered, connect the cable to the probe. Press the actuator button back on until it engages securely.

FAQs

- **Q: What is the maximum diameter of wires that can be used with KLEPS 2?**
 - A: KLEPS 2 is designed for wires up to a maximum diameter of 2 mm.
- **Q: What is the rated voltage and current for KLEPS 2?**
 - A: The rated voltage measurement category according to IEC 61010 is 30 VAC / 60 VDC O (2), and the rated current is 6 A.

Product

description

- **KLEPS 2**
 - Miniature clamp-type test probe with solder connection. Gold-plated sprung bronze contact hook for wires up to a maximum diameter of 2 mm. Remove actuator button for soldering, when cable is connected, press back on until it engages.

operating instruction


BA202

- article-no. / *colour
 - 9314671xx


00
black


01
red

drawing

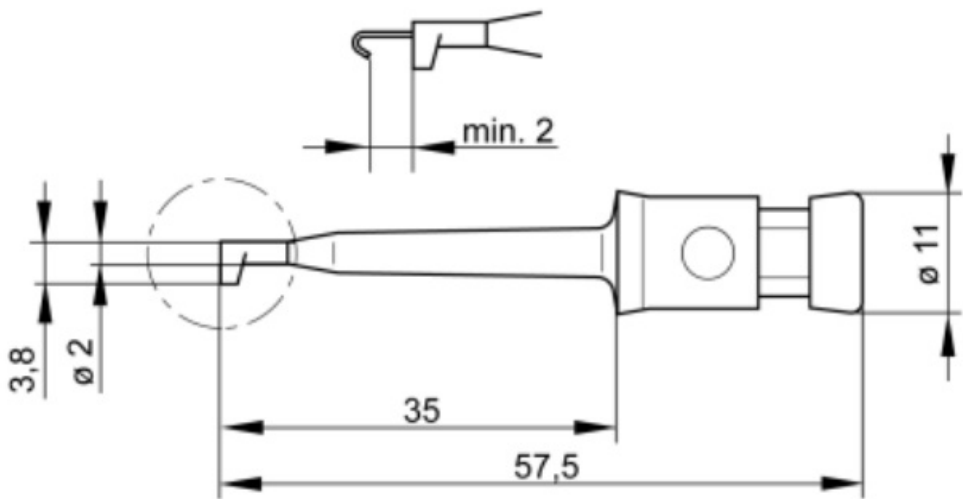

technical data

connection	solder connection
rated voltage	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O (2)
rated current (consider derating curve)	6 A
housing material	PA
temperature range acc. To IEC61010 ⁽¹⁾	-25 °C to +70 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	V-2
clamp type	contact hook, gold-plated
clamping range	max. Ø 2 mm

MORE INFO

1. contact the manufacturer for applications at deviating temperature ranges


2. without rated measurement category, for other circuits that are not directly connected to mains

- stand: 21.06.2022
- stand: 21.06.2022
- Downloaded from [Arrow.com](https://www.arrow.com).

CONTACT INFORMATION

- SKS Kontakttechnik GmbH
- Neue Schichtstraße 14
- D-09366 Niederdorf
- Phone +49-37296-930-300
- Fax +49 37296-930-301
- www.sks-kontakt.de
- info@sks-kontakt.de

Documents / Resources

	SKS KLEPS 2 Clamp Type Test Probe [pdf] Owner's Manual BA202, 9314671xx, KLEPS 2 Clamp Type Test Probe, KLEPS 2, Clamp Type Test Probe, Type Test Probe, Test Probe, Probe
--	---

References

-  [Kontakt.de](https://www.kontakt.de)
-  [Startseite](#)
-  [TCPDF](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.