



SKS MSEB-2610 Hirschmann T&M Sockets User Manual

[Home](#) » [SKS](#) » SKS MSEB-2610 Hirschmann T&M Sockets User Manual 



SKS Kontakttechnik GmbH



HIRSCHMANN
Test & Measurement

A BRAND OF SKS

MSEB-2610 Hirschmann T&M Sockets
User Manual



Contents

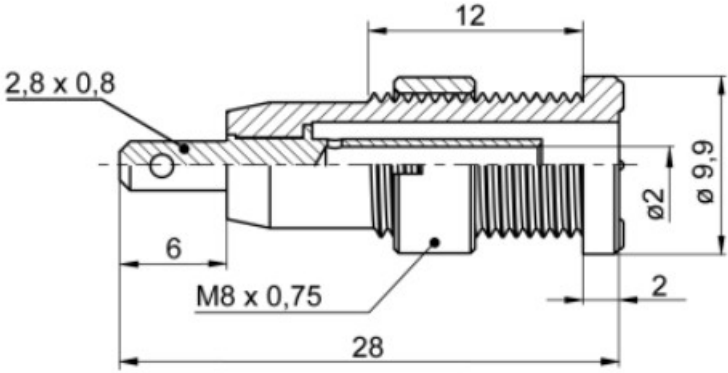
[1 MSEB 2610 F 2,8 Au](#)

[2 Documents /
Resources](#)

[2.1 References](#)

[3 Related Posts](#)

MSEB 2610 F 2,8 Au

Product	MSEB 2610 F 2,8 Au
description	Miniature safety built-in socket, 2mm diameter, gold-plated brass. Flat push-on Connection 2.8×0.8mm complying with DIN 46244. For installation into the switch- panels and equipment Chassis till 8mm wall thickness. Installation hole: 8mm diameter
operating instruction	BA254
article-no. / *colour	9754557xx ● 00 black ● 01 red ● 02 blue ● 03 yellow ● 04 green ● 05 brown ● 06 gray ● 07 white ● 09 violet Au
drawing	
	
technical data	
connection	flat connector 2.8 x 0.8 mm
rated voltage(1)	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current (consider derating curve)	10 A
material socket	brass, gold plated
housing material	PA
temperature range acc. To IEC61010 (2)	-25 °C to +70 °C
flammability class acc. to UL 94 (only valid for basic materials of housing)	V-2
standard	IEC 61010



1. for normal environmental conditions -5°C to +40°C
2. contact the manufacturer for applications at deviating temperature ranges stand: 12.07.2019

Documents / Resources

	SKS MSEB-2610 Hirschmann T&M Sockets [pdf] User Manual MSEB-2610 Hirschmann T M Sockets, MSEB-2610, Hirschmann T M Sockets, MSEB-2610 Sockets, F28Au
---	---

References

-  [PALI.COM](#)  [Германия и Мы](#)
-  [Startseite](#)
-  [TCPDF](#)