

Smallrig F60 Follow Focus Modular Instruction Manual

Home » SmallRig » Smallrig F60 Follow Focus Modular Instruction Manual



Contents

- 1 What's Included
- 2 Two Methods to Adjust Focus
- **3 Optional Accessories**
- **4 Palm Support Attachment**
- 5 15mm Quick Release Arm
- **6 Preparation Before Attaching the Follow Focus Onto the Cage**
- 7 Side / Top Mounting the Follow Focus
- 8 Easily Adjust the Mounting Method According to the Lens
- 9 Adjustable AB Stop Mechanism
- 10 Changing Gear Mounting From the Right to Left Side
- 11 Damping Adjustment
- 12 Forward / Reverse Rotation Switching
- 13 Marker Ring Replacement Procedure
- 14 Dual Rod Clamp Installation and Adjustment
- 15 Documents / Resources
- **16 Related Posts**


What's Included




- 1. Modular Follow Focus F60
- 2. Quick Release Arm
- 3. Silicone Gear
- 4. Φ15mm Rod
- 5. Rod Clamp (with NATO rail)
- 6. Snap-on Gear Ring
- 7. Palm Support
- 8. Allen Wrench
- 9. Carrying Bag

Two Methods to Adjust Focus

Friction Driven

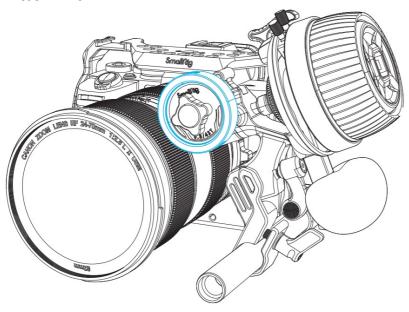



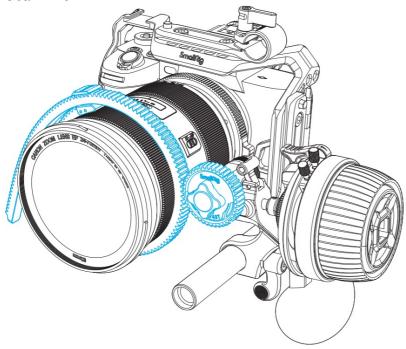

Optional Accessories

• Rod Clamp



• Quick Release Plate




• Silicone Gear




• Focus Adapter Par



Palm Support Attachment

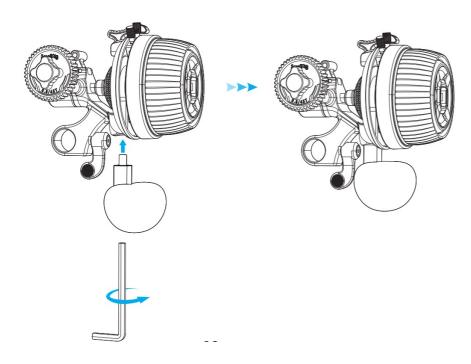


15mm Quick Release Arm

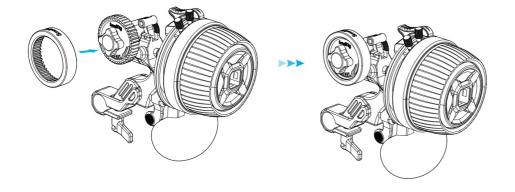


Preparation Before Attaching the Follow Focus Onto the Cage


Step 1

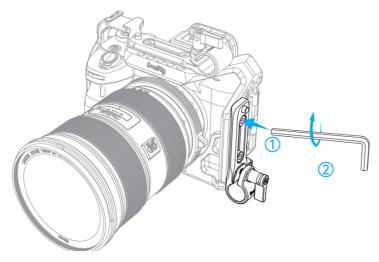

Attach 15mm Rod Clamp (with NATO Rail)





Insert 15mm Rod

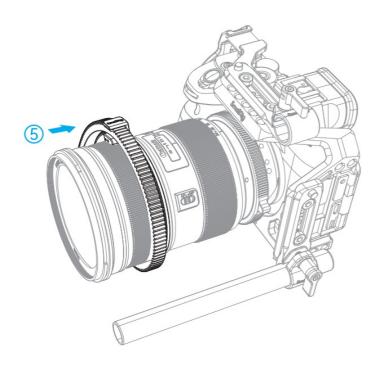

Attach Snap-on Gear Ring


Side / Top Mounting the Follow Focus

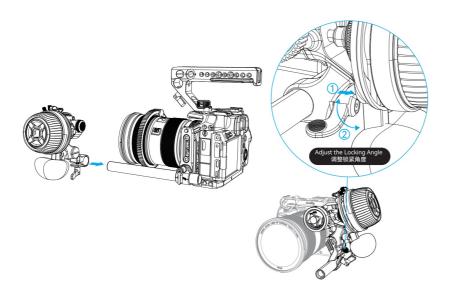

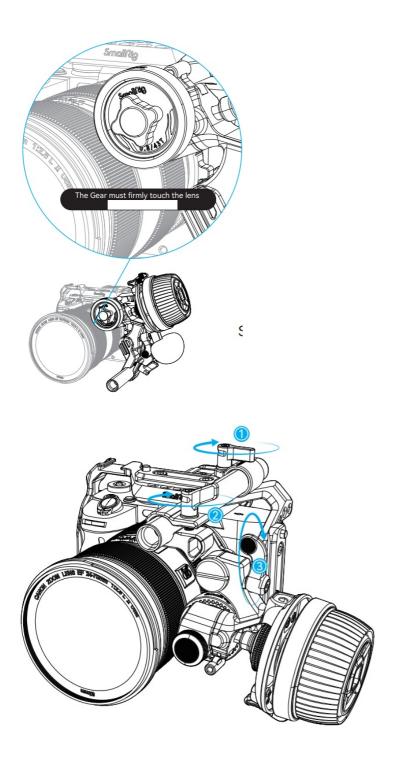


Steps for Mounting the Follow Focus on Top


Easily Adjust the Mounting Method According to the Lens

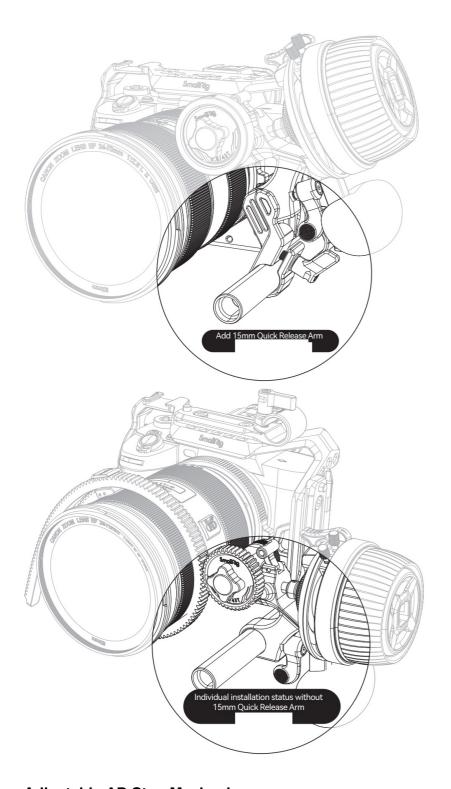


Adjustable AB Stop Mechanism

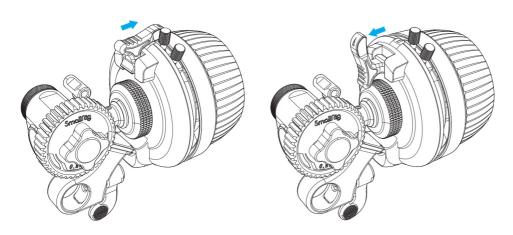


Changing Gear Mounting From the Right to Left Side

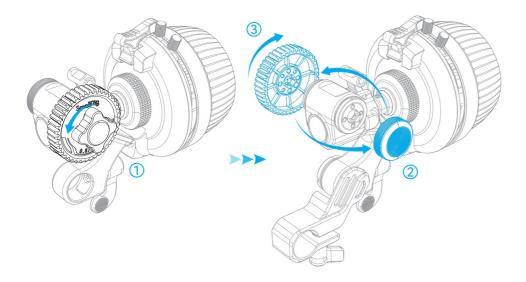


Damping Adjustment

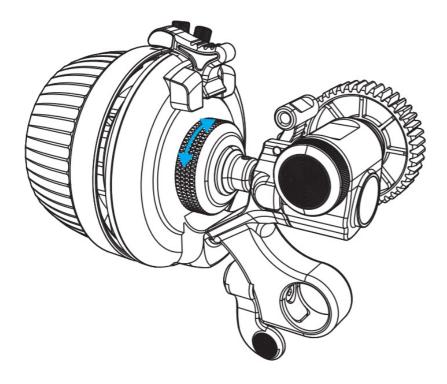


Forward / Reverse Rotation Switching

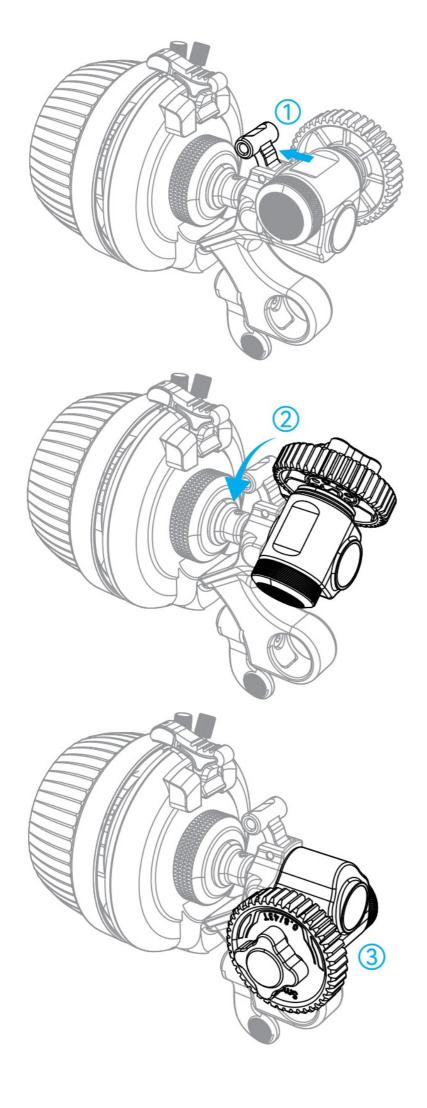

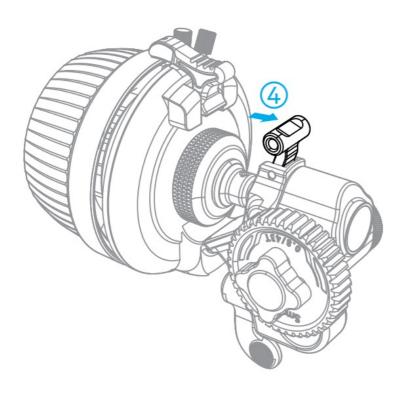


Marker Ring Replacement Procedure

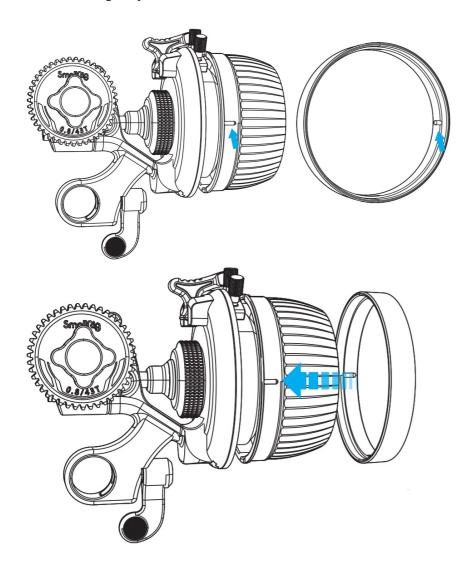


Note: Align with the slot


Dual Rod Clamp Installation and Adjustment

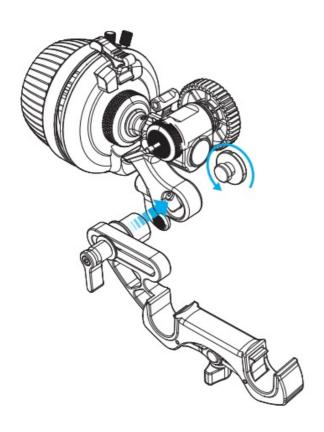


Locking and Adjusting Lever

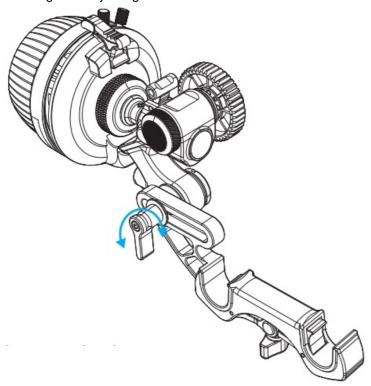


Tilt angle is adjustable

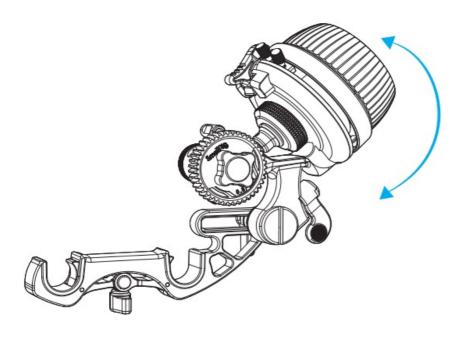

Horizontal positioning is adjustable

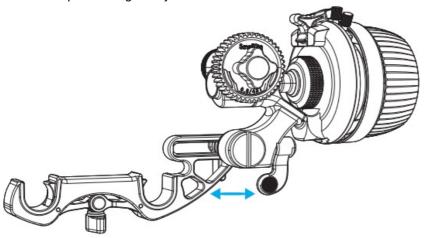

Attach Rod Clamp ID:4151

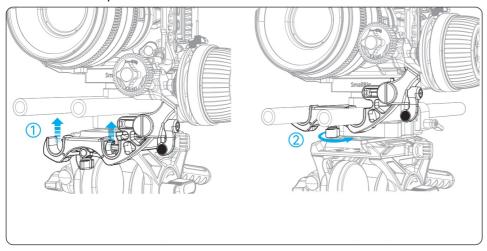

For more methods, please scan the code for details.

operating instructions





Documents / Resources



<u>Smallrig F60 Follow Focus Modular</u> [pdf] Instruction Manual F60 Follow Focus Modular, F60, Follow Focus Modular, Focus Modular, Modular

Manuals+,