

SmartAVI SM-DPN-4Q Advanced KVM Switch User Guide

Home » SmartAVI » SmartAVI SM-DPN-4Q Advanced KVM Switch User Guide





Contents

- 1 SM-DPN-4Q Advanced KVM
- **Switch**
- **2 EDID LEARN**
- **3 SYSTEM CONTROL**
- **4 HARDWARE INSTALLATION**
- **5 TECHNICAL SPECIFICATIONS**
- **6 WHAT'S IN THE BOX**
- 7 Documents / Resources
 - 7.1 References
- **8 Related Posts**

SM-DPN-4Q Advanced KVM Switch



QUAD HEAD 4-PORT
DISPLAYPORT KVM SWITCH WITH USB 2.0 SHARING
Quick Start Guide
A full Manual can be downloaded from www.smartavi.com/SM-DPN-4Q/

EDID LEARN

The KVM is designed to learn a connected monitor's EDID upon power up. In the event of connecting a new monitor to the KVM, a power re-cycle is required.

SYSTEM CONTROL

There are three ways to control the SM-DPN:

Keyboard HotKeys, RS-232 Serial Commands, and Front Panel Buttons.

The settings for the serial connection are as follows:

Baud rate: 115200; Data Bits: 8; Parity: None; Stop Bits: 1; Flow Control: None.


The following commands can be used:

Command	HotKey	RS-232
Switch KVM	[CT][CT][#] <cr></cr>	//m[#] <cr></cr>
Audio Only	[CT][CT]a[#] <cr></cr>	//a[#] <cr></cr>
KM Only	[CT][CT]c[#] <cr></cr>	//c[#] <cr></cr>
USB Only	[CT][CT]u[#] <cr></cr>	//u[#] <cr></cr>
Learn EDID	[CT][CT]e <cr></cr>	//e <cr></cr>
SW Reset	[CT][CT]r	//r <cr></cr>
Status Query	N/A	//?? <cr></cr>
Current HK Trigger	[Alt][Alt][Alt]x 0 <cr></cr>	//hk <cr></cr>
Current HK Trigger	[HK][HK] x[1 2 3] <cr></cr>	N/A

Chart Key

[CT] = Ctrl

<CR> = Carriage Return (Enter Key)

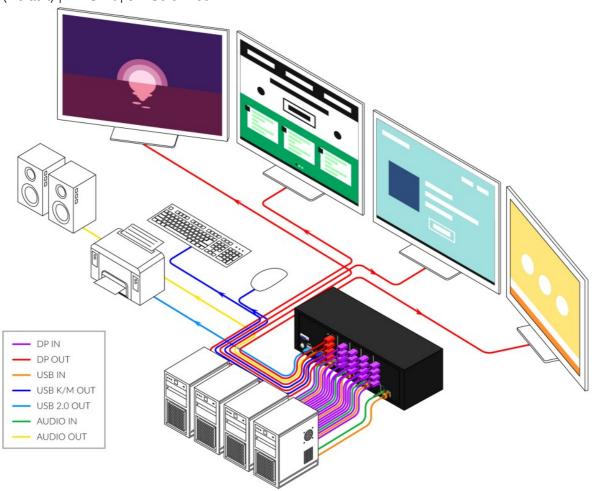

HARDWARE INSTALLATION

- 1. Ensure that power is turned off or disconnected from the unit and the computers.
- 2. Use DP cables to connect the DP output ports from each computer to the corresponding DP IN ports of the unit.
- 3. Use a USB cable (Type-A to Type-B) to connect a USB port on each computer to the respective USB ports of the unit.
- 4. Optionally connect a stereo audio cable (3.5mm to 3.5mm) to connect the audio output of the computers to the AUDIO IN ports of the unit.
- 5. Connect monitors to the DP OUT console ports of the unit using DP cables.
- 6. Connect a USB keyboard and mouse in the two USB console ports.
- 7. Optionally connect stereo speakers to the AUDIO OUT port of the unit.
- 8. Finally, power on the KVM by connecting a 12VDC power supply to the power connector, and then turn on all the computers.

Note: You can connect up to 4 computers to the 4 port KVM.

TECHNICAL SPECIFICATIONS

VIDEO		
Format	DisplayPort	
Maximum Pixel Clock	165 MHz	
Input Interface	(16) DisplayPort	
Output Interface	(4) DisplayPort	
Resolution	3840 x 2160 @ 30 Hz	
DDC	5 volts p-p (TTL)	
Input Equalization	Automatic	
Input Cable Length	Up to 20 ft.	
Output Cable Length	Up to 20 ft.	
USB		
Signal Type	USB 2.0, 1.1, and 1.0 w/ internahub	
Input Interface	(4) USB Type B	
Output Interface	(2) USB 1.1 Type A for KVM Devices (2) USB 2.0 Type A Transparent	
AUDIO	<u>'</u>	
Input	(4) 3.5 mm Stereo Audio	
Output	(1) 3.5 mm Stereo Audio	
POWER		
Power Requirements	12V DC, 2A power adapter with center-pin positive polarity	
ENVIRONMENT	<u>'</u>	
Operating Temp	32° to 104° F (0° to 40° C)	
Storage Temp	-4° to 140° F (-20° to 60° C)	
Humidity	0-80% RH, non-condensing	
CONTROL		
Front Panel	Push Buttons with LED indicators	
RS-232	Via Serial @ 115200 bps	
Hot Keys	Via Keyboard	
OTHER		
Emulation	Keyboard, Mouse and Video	

WHAT'S IN THE BOX

PART NO.	QTY	DESCRIPTION
SM-DPN-4Q-S	1	Quad Head 4-Port DisplayPort KVM Switch with Audio and USB 2.0 Suppor t.
PS12VDC2A	1	12V DC, 2A power adapter with center-pin positive polarity.
	1	Quick Start Guide

NOTICE

The information contained in this document is subject to change without notice. SMART-AVI makes no warranty of any kind with regard to thismaterial, including but not limited to, implied warranties of merchantability and fitness for particular purpose. SMART-AVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material. No part of this document may be photocopied, reproduced, or translated into another language without prior written consent from SMART-AVI, Inc.



Toll Free: (888)-994-7427 Phone: (702) 800-0005 2455 W. Cheyenne Ave, Suite 112 North Las Vegas, NV 89032 smartavi.com

Documents / Resources



<u>SmartAVI SM-DPN-4Q Advanced KVM Switch</u> [pdf] User Guide SM-DPN-4Q Advanced KVM Switch, SM-DPN-4Q, Advanced KVM Switch, KVM Switch, Switch

References

- MI Home SmartAVI
- MI SM-DPN-4Q SmartAVI
- User Manual

Manuals+,