



SMARTAVI SM-DVN-82X Matrix KVM Switch User Guide

[Home](#) » [SmartAVI](#) » SMARTAVI SM-DVN-82X Matrix KVM Switch User Guide 

SMARTAVI SM-DVN-82X Matrix
KVM Switch User Guide



SM-DVN-82X

Matrix KVM Switch





ADVANCED 8-PORT, 2 USERS SINGLE-HEAD DVI-D MATRIX KVM SWITCH WITH AUDIO

Quick Start Guide

A full Manual can be downloaded from

www.smartavi.com/SM-DVN-82-X/

EDID LEARN

The KVM is designed to learn the EDID of the monitor connected to Console 1 upon power up. In the event of connecting a new monitor to the KVM, a power re-cycle is required.

SYSTEM CONTROL

There are three ways to control the SM-DVN-82X: Keyboard HotKeys, RS-232 Serial Commands, and Front Panel Buttons.

The settings for the serial connection are as follows: Baud rate: 115200; Data Bits: 8; Parity: None; Stop Bits: 1; Flow Control: None.

The following commands can be used:

Command	HotKey	RS-232
Switch Control	[CT] [CT] c [#]	// c [u] [#]
Switch View	[CT] [CT] v [#]	// v [u] [#]
Audio Only	[CT] [CT] a [#]	// a [u] [#]
Learn EDID	[CT] [CT] e <CR>	// e <CR>
SW Reset	[CT] [CT] r	// r <CR>
Status Query	N/A	// ?? <CR>
Current HK Trigger	[Alt] [Alt] [Alt] x 0 <CR>	// hk <CR>
Update HK Trigger	[HK] [HK] x [1 2 3] <CR>	N/A

Note—All HotKey and RS-232 commands end with <CR>


Chart Key

[CT] = Ctrl

[u] = User Console to update [1-8] <CR> = Carriage Return (Enter Key)

[HK] = Current Hot Key Trigger


FRONT PANEL

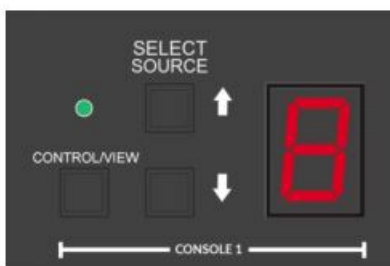

- **Control/View** – Toggle between Control and View mode
- **UP**– Increment channel, loop back to 1 after 8
- **DOWN** – Decrement channel, loop back to 8 after 1
- Press and hold the **Control/View button**, then press the **DOWN** button – disables the display and KM control for that user.

HARDWARE INSTALLATION

1. Ensure that power is turned off or disconnected from the unit and the computers.
2. Use DVI cables to connect the DVI output ports from each computer to the corresponding DVI-D IN ports of the unit.
3. Use a USB cable (Type-A to Type-B) to connect a USB port on each computer to the respective USB ports of the unit.
4. Optionally connect a stereo audio cable (3.5mm to 3.5mm) to connect the audio output of the computers to the AUDIO IN ports of the unit.
5. Connect monitors to the DVI-D OUT console ports of the unit using DVI cables.
6. Connect a USB keyboard and mouse in the two USB console ports.
7. Optionally connect stereo speakers to the AUDIO OUT port of the unit.
8. Finally, power on the Matrix by connecting a 12VDC power supply to the power connector, and then turn on all the computers.

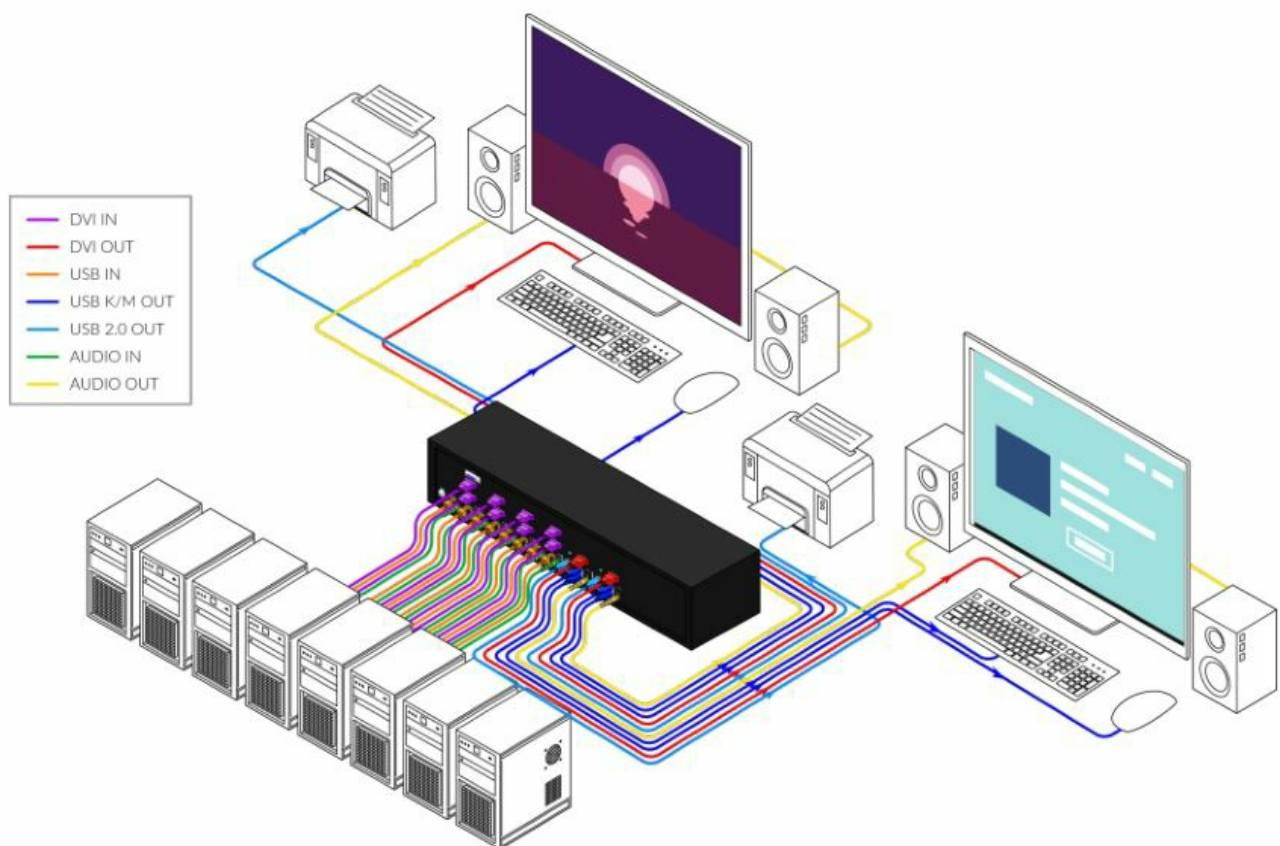

TECHNICAL SPECIFICATIONS

VIDEO	
Format	DVI Dual Link
Maximum Pixel Clock	165 MHz
Input Interface	(8) DVI-D 29-pin (female)
Output Interface	(2) DVI-D 29-pin (female)
Resolution	2560 x 1600 @ 60Hz
DDC	5 volts p-p (TTL)
Input Equalization	Automatic
Input Cable Length	Up to 20 ft.
Output Cable Length	Up to 20 ft.
USB	
Signal Type	USB 1.1 and 1.0 Keyboard and Mouse only.
Input Interface	(8) Keyboard-Mouse
Output Interface	(4) USB 1.1 Type A for KVM Devices; (4) USB 2.0 Type A Transparent
AUDIO	
Input	(8) Connector Stereo 3.5mm Female
Output	(1) Connector Stereo 3.5mm Female
POWER	
Power Requirements	12V DC, 3A power adapter with center-pin positive polarity
ENVIRONMENT	
Operating Temp	32° to 104° F (0° to 40° C)
Storage Temp	-4° to 140° F (-20° to 60° C)
Humidity	0-80% RH, non-condensing
CONTROL	
Front Panel	Push Buttons with LED indicators
RS-232	Via Serial @ 115200 bps
Hot Keys	Via Keyboard
OTHER	
Emulation	Keyboard, Mouse and Video

WHAT'S IN THE BOX

PART NO. QTY DESCRIPTION		
SDVN-82-X	1	8-port, 2 User DVI-D Matrix KVM Switch
PS12VDC3A	1	12V DC, 3A power adapter with center-pin positive polarity.
	1	Quick Start Guide

NOTICE

The information contained in this document is subject to change without notice. SmartAVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for particular purpose. SmartAVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material. No part of this document may be photocopied, reproduced, or translated into another language without prior written consent from SmartAVI, Inc.



Toll Free: (800) AVI-2123

Phone: (702) 800-0005

2455 W. Cheyenne Ave, Suite 112

North Las Vegas, NV 89032

smartavi.com

Contents

[1 Documents /](#)

[Resources](#)

[1.1 References](#)

Documents / Resources

	<p>SMARTAVI SM-DVN-82X Matrix KVM Switch [pdf] User Guide SM-DVN-82X Matrix KVM Switch, SM-DVN-82X, Matrix KVM Switch, KVM Switch, Switch</p>
--	--

References

- [AM Home - SmartAVI](#)
- [User Manual](#)

Manuals+.