

SmartStraps 132 Tow Rope Strap with Hooks Instruction Manual

Home » SmartStraps » SmartStraps 132 Tow Rope Strap with Hooks Instruction Manual

Contents

- 1 SmartStraps 132 Tow Rope Strap with Hooks
- **2 Product Information**
- **3 Product Usage Instructions**
- **4 INSTRUCTIONS**
- 5 Documents / Resources
 - **5.1 References**



SmartStraps 132 Tow Rope Strap with Hooks



Product Information

- The 9,000 LB Tow Strap is a durable and heavy-duty strap designed to tow vehicles up to a weight of 3000 lb (1361 kg). It is manufactured by Winston Products Company and is available on Smartstraps.com. The product comes with installation instructions and warranty information that can be found online on the same website.
- It is important to observe all warnings, instructions, and capacity limitations before using this product. Failure to comply with the instructions and capacity limitations may result in serious personal injury and/or significant property damage.
- The Safe Working Load Limit of the Tow Strap is 3000 lb (1361 kg).

Product Usage Instructions

- 1. Secure one of the ends with a hook to a tow hook, chain plate loophole, or D-ring shackle on the vehicle that will be doing the pulling.
- 2. Repeat the first step on the vehicle that needs pulling.
- 3. When both hook ends are secure to each vehicle you are ready to tow.
- 4. After the pull is complete, inspect and safely store Tow Strap for the next use.

It is recommended to call 1-844-295-9218 for assistance with any problems with the Smartstraps product instead of returning it to the retailer from which it was purchased.

Always follow the usage instructions and observe the Safe Working Load Limit of the Tow Strap to ensure the safe and effective use of the product.

WARNING:

Read and observe all warnings, instructions, and capacity limitations before using this product. Failure to comply with this warning and the associated instructions and capacity limitations may result in serious personal injury and/or significant property damage.

INSTRUCTIONS

- 1. Secure one of the ends with a hook to a tow hook, chain plate loophole, or D-ring shackle on the vehicle that will be doing the pulling.
- 2. Repeat the first step on the vehicle that needs pulling.
- 3. When both hook ends are secure to each vehicle you are ready to tow.
- 4. After the pull is complete, inspect and safely store Tow Strap for the next use.

SAFE WORKING

• LOAD LIMIT 3000 lb (1361 kg)


IF YOU EXPERIENCE ANY PROBLEMS WITH YOUR SMARTSTRAPS PRODUCT DO NOT RETURN THE UNIT TO THE RETAILER FROM WHICH IT WAS PURCHASED. INSTEAD, PLEASE CALL 1-844-295-9218 FOR ASSISTANCE WITH ANY PROBLEMS. WARRANTY INFORMATION IS AVAILABLE UPON REQUEST AND CAN BE FOUND ONLINE AT **SMARTSTRAPS.COM**.

WINSTON PRODUCTS COMPANY

SMARTSTRAPS.COM

WINSTON PRODUCTS, LLC. 30339 DIAMOND PARKWAY CLEVELAND, OH 44139

Documents / Resources

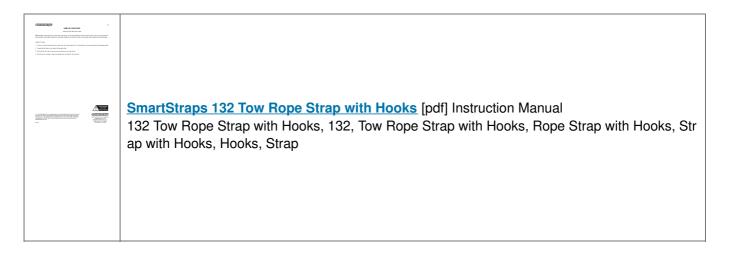

References

• SmartStraps -

Manuals+,