

SNIXWOO C471 Lockable Roof Rails and Cross Bars



SNIXWOO C471 Lockable Roof Rails and Cross Bars Installation Guide

[Home](#) » [SNIXWOO](#) » SNIXWOO C471 Lockable Roof Rails and Cross Bars Installation Guide 

Contents

- [1 SNIXWOO C471 Lockable Roof Rails and Cross Bars](#)
- [2 Product Usage Instructions](#)
- [3 Information](#)
- [4 Crossbars Installation](#)
- [5 PARTS LIST](#)
- [6 INSTALLATION](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)



SNIXWOO C471 Lockable Roof Rails and Cross Bars



Specifications:

- Product Name: Roof Rails Kit
- Model Number: P/N 08L02-TJB-200
- Application: 2019 RDX
- Issue Date: May 2018

Product Usage Instructions

Installation:

1. Remove the left roof molding from the rear of the roof to the front. (Do not reuse.)
2. Remove the six clips from each stud bolt on the roof.
3. Ensure the left roof rail is positioned underneath the front glass molding.
4. Install each cap to the left roof rail with the two retaining tabs.
5. Repeat steps 1 through 4 on the right side of the vehicle.

Use and Care:

Check the roof rail mounting bolts frequently and retighten if necessary to ensure proper installation and safety.

FAQ:


Q: Can I reuse the left roof molding?

A: No, the left roof molding should not be reused during the installation process.

Q: How often should I check the roof rail mounting bolts?

A: It is recommended to check the roof rail mounting bolts frequently and retighten if necessary to maintain secure installation.

Information

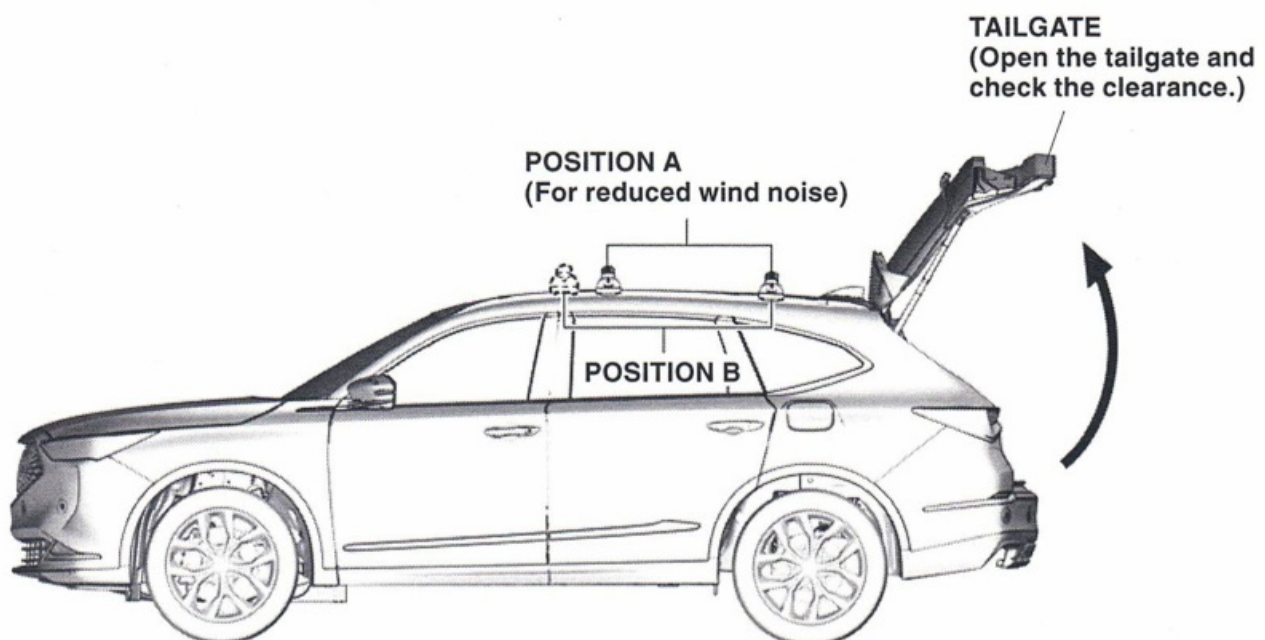


Crossbars Installation


Remove the four covers on each roof rail as shown. Store the covers in a safe place in case the crossbars are removed.

NOTE


Do not remove the front set of covers at this time.

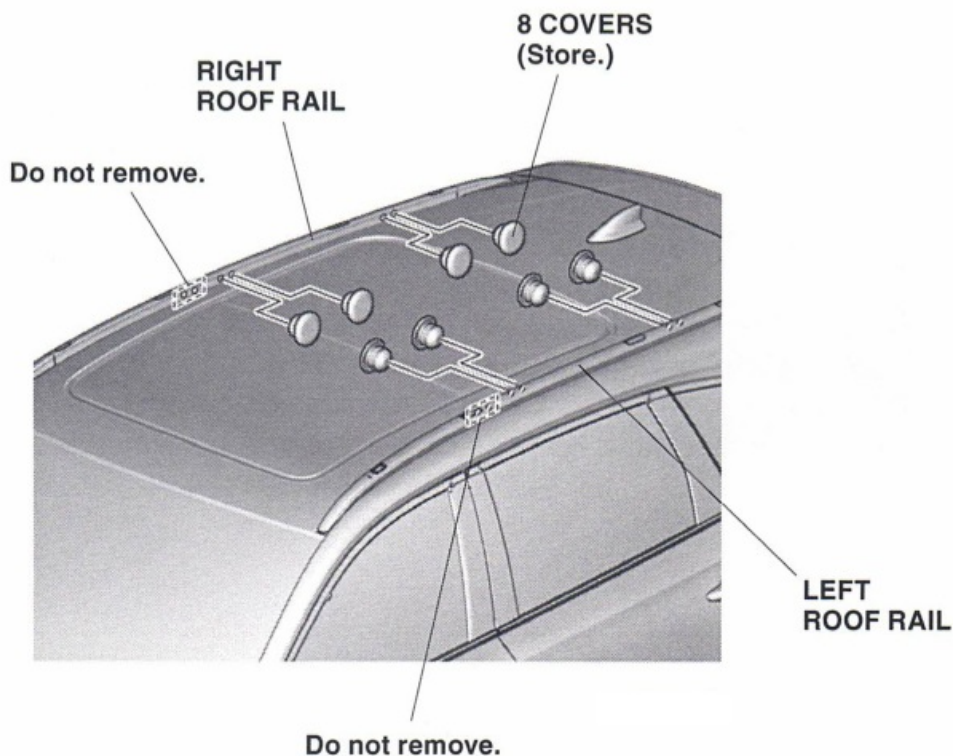


On each crossbar foot, turn the supplied key 90° counterclockwise to unlock the cover. Then, remove them. Identify the front and rear crossbars as shown.

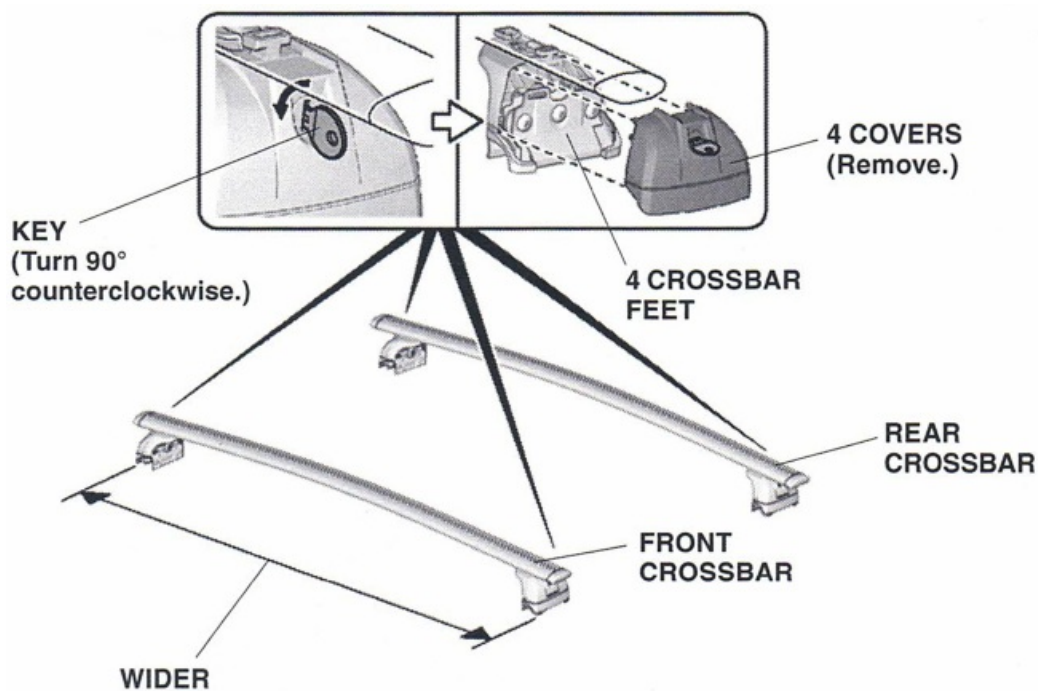


Check the identification marks, and position the front and rear crossbars on the roof rails.

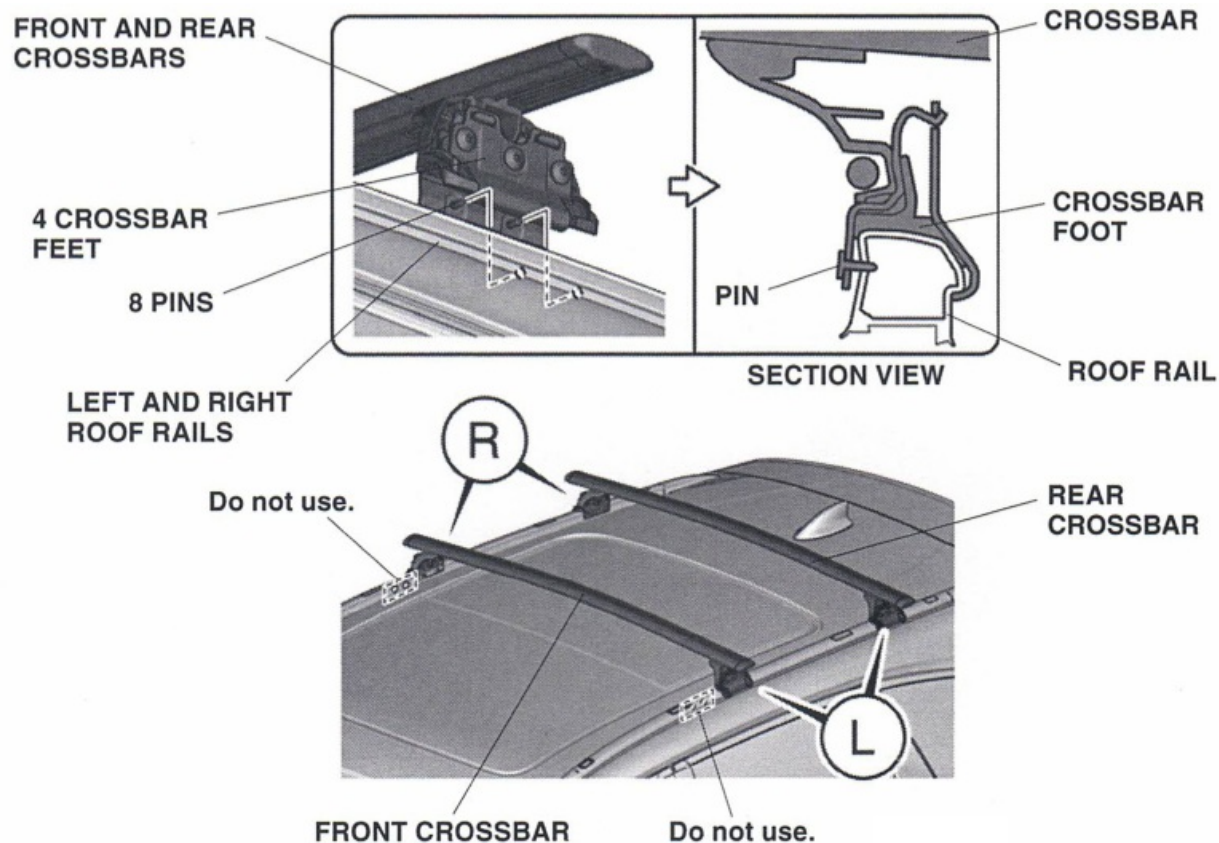


To line up the crossbar pins with the roof rails, you may need to slightly loosen the crossbar screws. Make sure each clamp is fully seated on the roof rail as shown. Loosely tighten each screw, then torque them to 3.0 lb-ft (4 N·m).

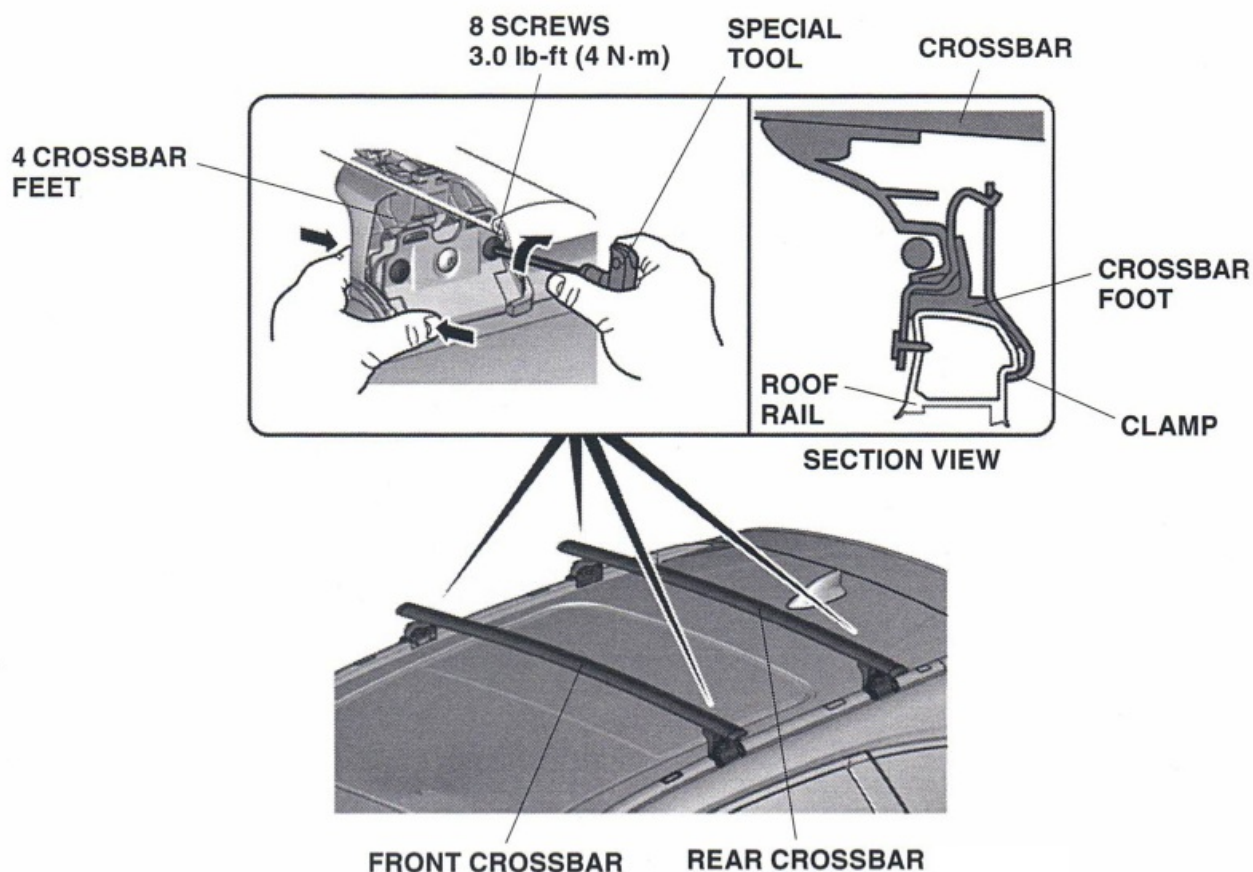

Install the crossbar foot cover to the crossbar foot with firm pressure. Then, rotate the key 90° clockwise, and remove it. Repeat for each crossbar foot.

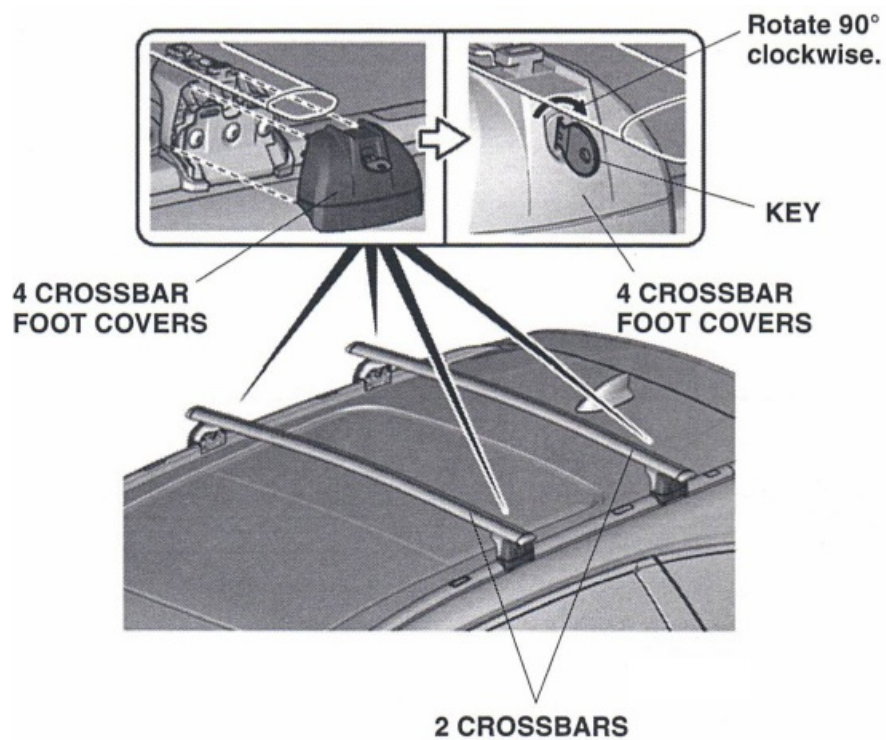

Make sure the crossbars are firmly secured by applying pressure to them as shown. Store the keys and special tool in a safe place.

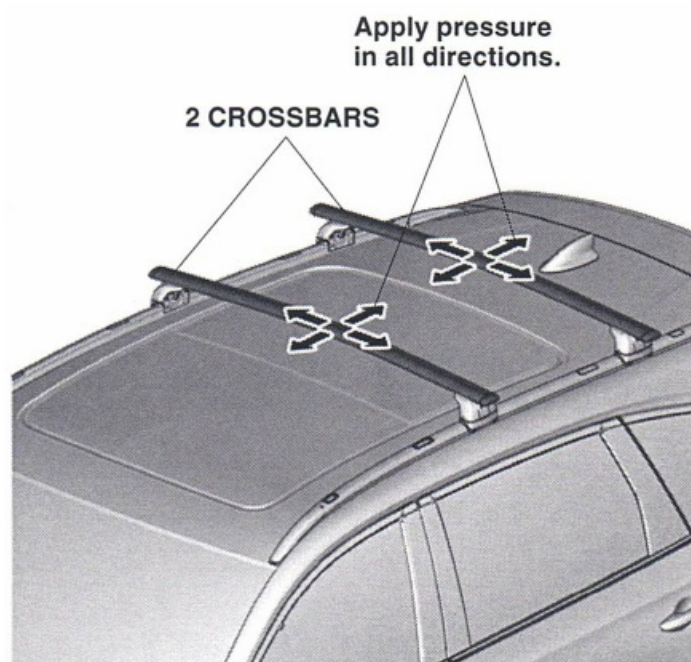

PARTS LIST

Roof Rails Kit
P/N 08L02-TJB-200 P/N 08L02-TJB-200A

Left roof rail



Right roof rail



6 Caps



12 TORX nuts



TOOLS AND SUPPLIES REQUIRED


T-30 TORX bit

Torque wrench

The following tools are available through the Acura Tool and Equipment Program. On the iN, click on: Service > Service Bay > Tool and Equipment Program, then enter the number under "Search." Or, call 888-424-6857.

- Trim Tool Set (T/N SOJATP2014)
- Plastic Trim Tool (T/N SILTRIMTL10)

Illustration of the Roof Rails on the Vehicle

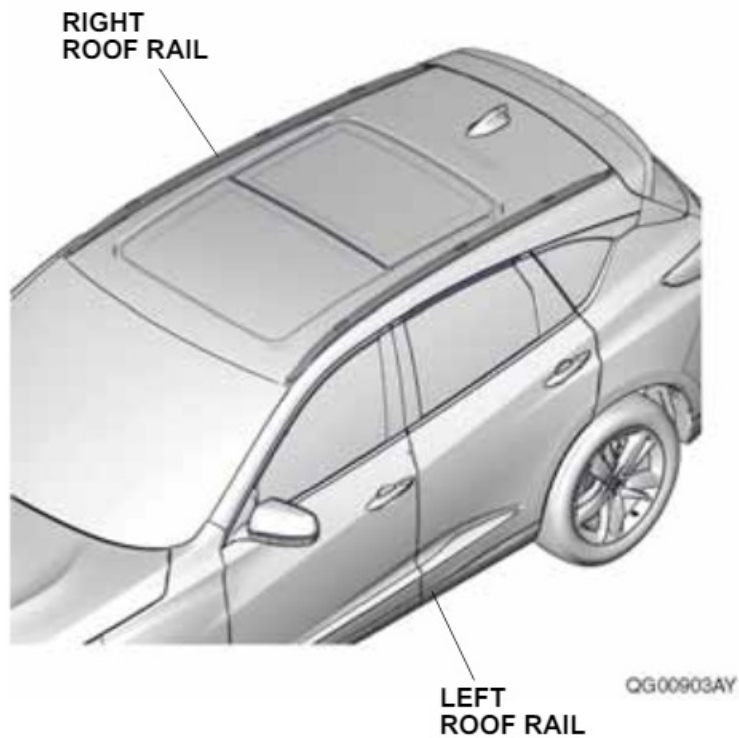

INSTALLATION


Client Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by “do-it-yourselfers.”

NOTE:


- Be extremely careful not to damage the roof and other finished surfaces of the body when installing the roof rails.
- The weight of the cargo must not exceed the maximum weight capacity of 165 lbs (75 kg).

Installing the Roof Rails


1. Remove the left roof molding starting from the rear of the roof, and work your way to the front.

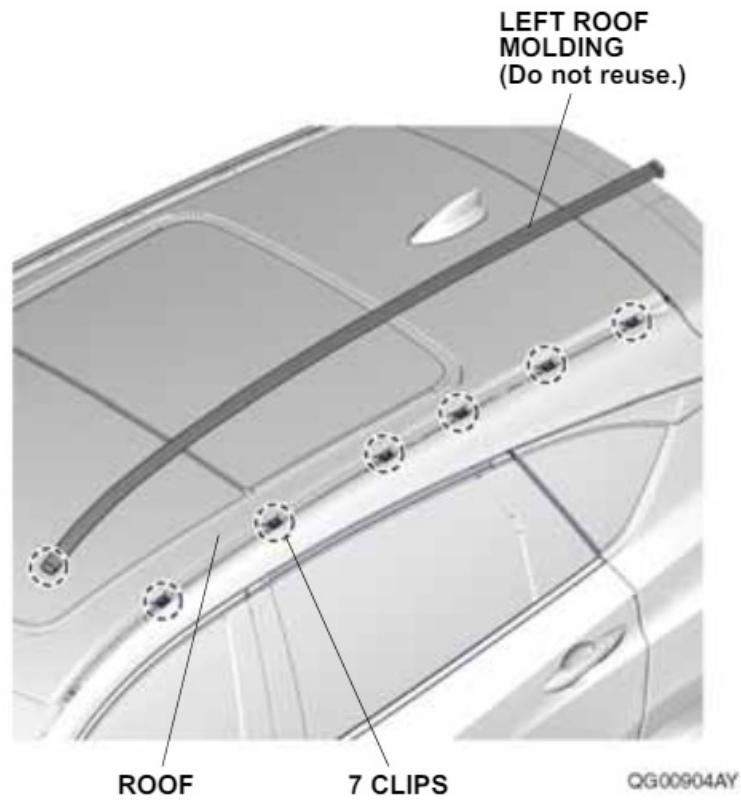


2. Remove the six clips from each stud bolt on the roof.

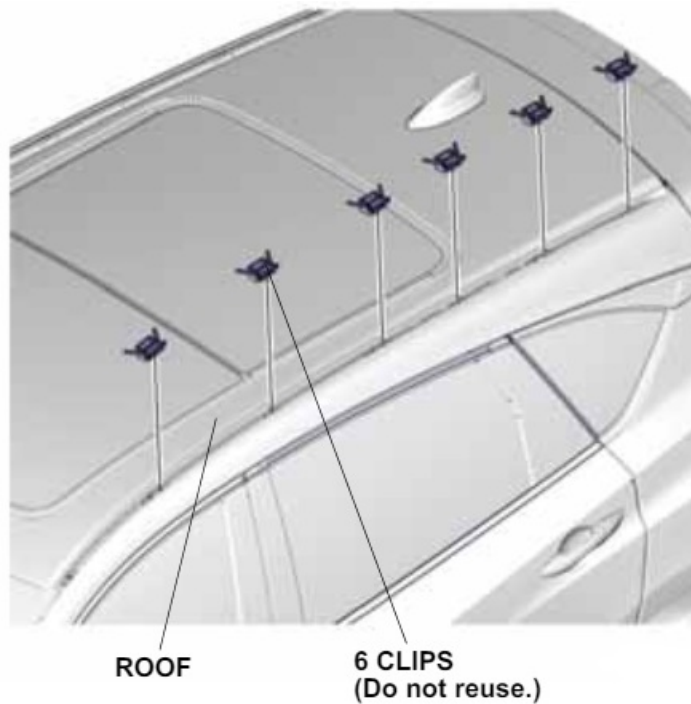

3. Install the left roof rail to the roof with six TORX nuts.
Torque them to 9 lb-ft (12 N·m).
NOTE: Make sure the left roof rail is underneath the front glass molding.

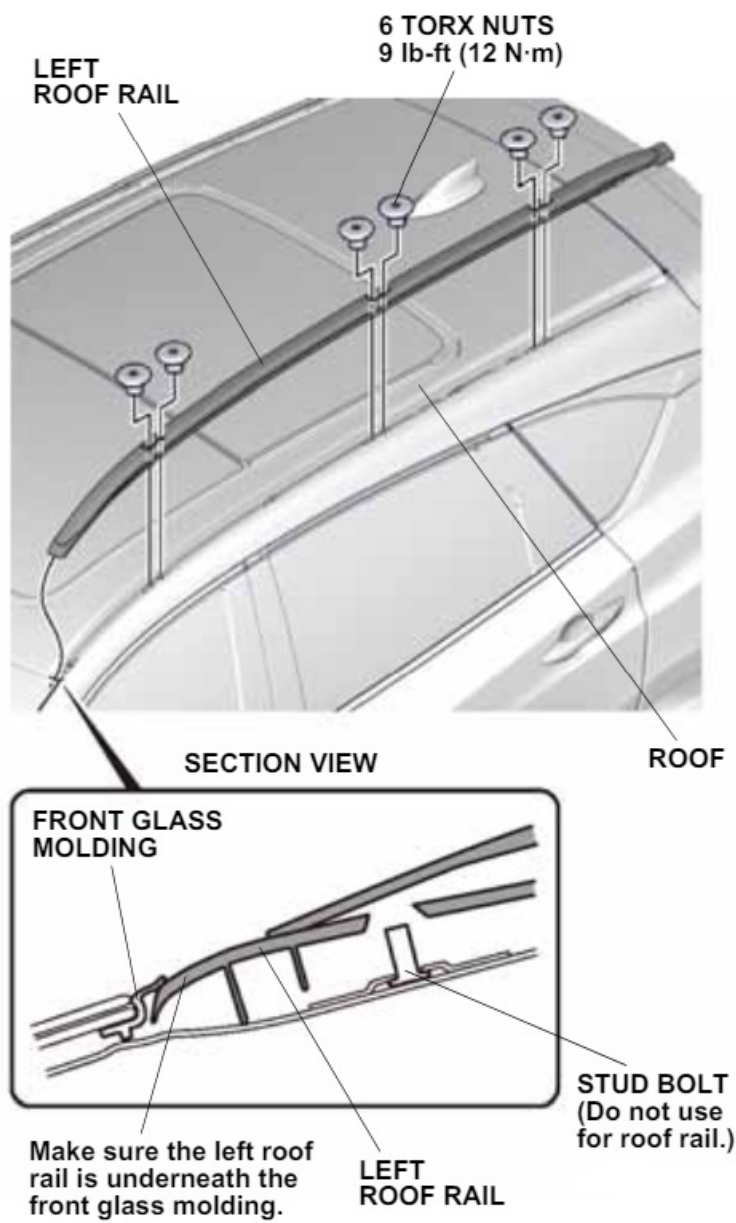

4. Install each cap to the left roof rail with the two retaining tabs.

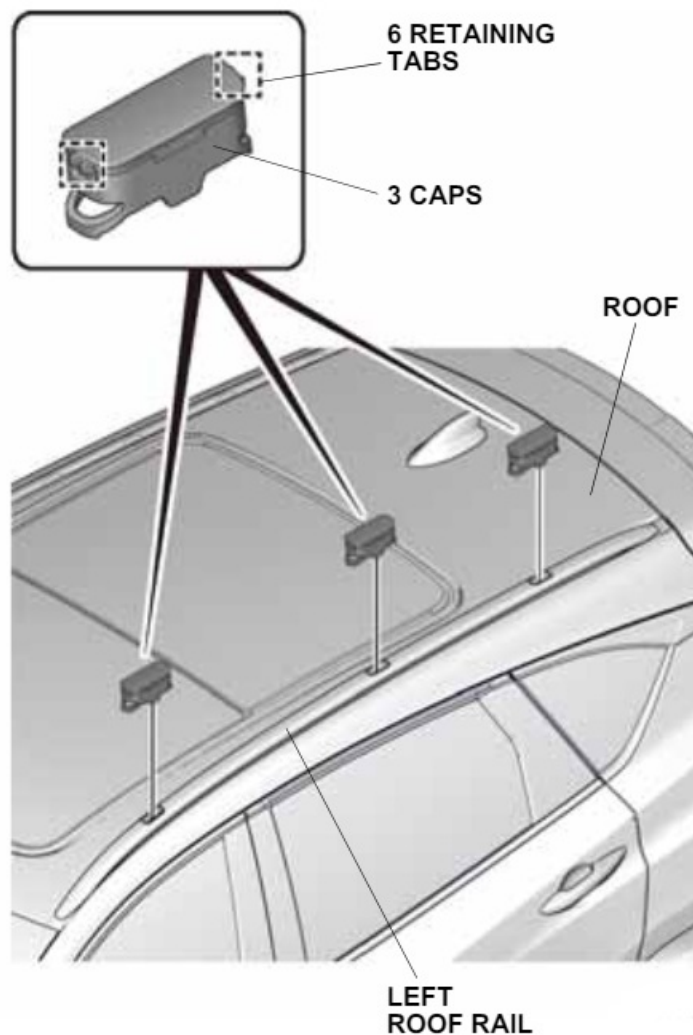

5. Repeat steps 1 through 4 on the right side of the vehicle.



Put a copy of this page in the glove box for your customer.

USE AND CARE

Check the roof rail mounting bolts frequently, and retighten if necessary.

© 2018 American Honda Motor Co., Inc. – All Rights Reserved.

Documents / Resources

<p>C471</p>  <p>Roof Rack</p> 	<p>SNIXWOO C471 Lockable Roof Rails and Cross Bars [pdf] Installation Guide</p> <p>C471, C471 Lockable Roof Rails and Cross Bars, Lockable Roof Rails and Cross Bars, Roof Ra ils and Cross Bars, Rails and Cross Bars, Cross Bars, Bars</p>
--	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.