

Snobos G2 Smart Lock Gateway User Manual

Home » Snobos » Snobos G2 Smart Lock Gateway User Manual





Contents

- 1 GATEWAY G2
- 2 Light Status
- 3 Pair the Gateway with TTlock **APP**
- **4 Limited Warranty**
- **5 Documents / Resources**
 - **5.1 References**

GATEWAY G2

Model:	G2
Dimensions	70mm x 70mm x 26mm
Network:	WiFi 2.4G
IEEE standard:	802.11 b/g/n
Power interface .	Type-C USB
Power input:	DCSV/SOOmA

Light Status



When the gateway is powered on:

● → Light flashes alternately in red and blue: Stand-by mode, ready for pairing

Blue light: Working modeRed light: Network failure


Pair the Gateway with TTlock APP

1. Activate the TTlock APP.




2. Press"


—".

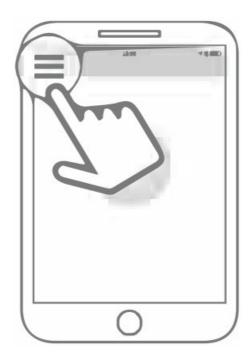


3. Select [Gateway].



4. Select [G2].

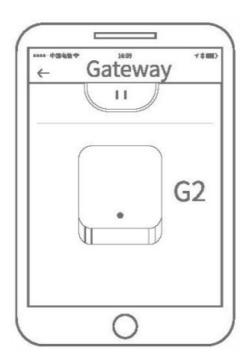

5. Plug in the gateway and power it on, while the light flashes alternately in red and blue.

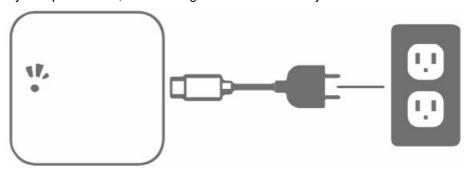

6. Press"

+"sign.



7. Add Gateway.



8. Select the network and fill in the password.



9. Add complete.



▲ Notice: If times out, please power off and try it again.

Limited Warranty

- 1. For any defect in material and workmanship, the original purchaser of the product
 - 1. Can return or ask for a replacement within 7 invoice days.
 - 2. Can ask for a replacement within 15 invoice days.
 - 3. Can ask for free repair in 365 invoice days.
- 2. This warranty does not cover defects caused by modifica- tion, alteration, misuse or physical abuse of the product.



Documents / Resources



Snobos G2 Smart Lock Gateway [pdf] User Manual G2 Smart Lock Gateway, G2, Smart Lock Gateway, Lock Gateway, Gateway

References

User Manual