



SOLUM EL035F5C4C Newton Electronic Shelf Labels Instructions

[Home](#) » [SOLUM](#) » SOLUM EL035F5C4C Newton Electronic Shelf Labels Instructions 

Contents

- [1 SOLUM EL035F5C4C Newton Electronic Shelf Labels](#)
- [2 Product Information](#)
- [3 General Description](#)
- [4 Specification](#)
- [5 Product Handling Precautions](#)
 - [5.1 Product Cleaning](#)
 - [5.2 Battery Replacement](#)
- [6 Battery Handling Guide](#)
- [7 FCC STATEMENT](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)



SOLUM EL035F5C4C Newton Electronic Shelf Labels



Product Information

Specifications

- **Label Dimensions:** 3.52: 3.43 x 1.68 x 0.47 inch (99.58 x 49.19 x 12.15 mm)
- **Display Dimensions:** 3.52: 3.1 x 1.5 inch (81.0 x 37.9 mm)
- **Display Resolution:** 3.52: 384 x 180 Pixel (120dpi)
- **Label Weight:** 3.52: TBD
- **Viewing Angle:** BW (black, white) BWR (black, white, red) BWY (black, white, yellow) BWRY (black, white, red yellow) ** color options are not available for all sizes. See Section 3.XX for full list of options.
- **Battery:** Battery Pack (CR2450 Lithium Battery 2EA)
- **Wireless Communication:** 2.4 GHz Unlicensed ISM band SOLUM proprietary protocol FeliCa NFC Forum Type 3 (13.56MHz) NFC Passive Only
- **Communication Distance:** 98 feet (30m) radius Line of Sight
- **Security:** 128-bit AES Encryption
- **Compliance:** FCC, CE, RoHS
- **Operating Temperature:** Nominal ESLs BWR: 32F ~ 104F (0C ~ 40C) @45~70% RH BWY: 32F ~ 86F (0C ~ 30C) @45~70% RH BWRY: 32F ~ 104F (0C ~ 40C) @45~70% RH Freezer ESLs BW: -13F ~ 31F (-25C ~ 0C)
*freezer ESL must be used in freezer environments
- **Storage Temperature:** 32F ~ 104F (0C ~ 40C) @45~70% RH


Product Handling Precautions

Provisions should be made to protect against any damage to the product caused by improper handling. The purchaser assumes any responsibility for damage to the product caused by improper handling. Product should be stored in a 32F ~ 104F (0C ~ 40C) @45~70% RH environment and should be installed within 90 days of receipt.

Usage Environment

The SOLUM NEWTON Electronic Shelf Labels (ESLs) are designed to be used in environments such as supermarkets, warehouses, and factories. They are used to electronically display key information such as price and product information, eliminating the need for traditional paper labels.

General Description

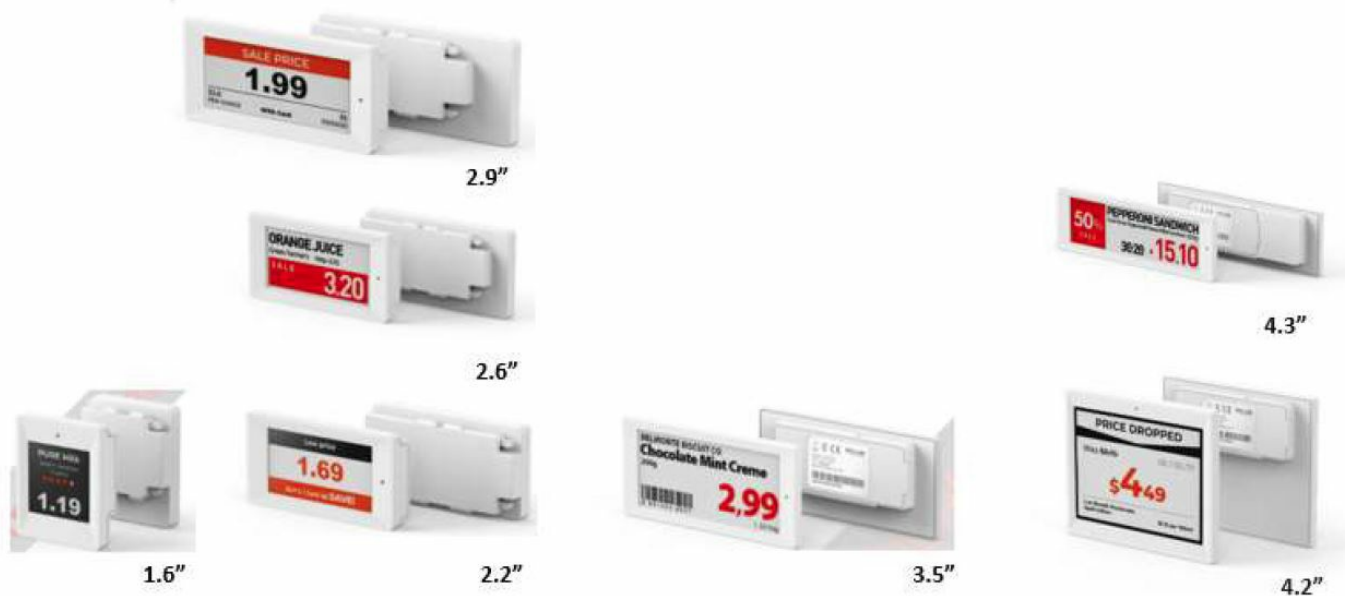

SOLUM NEWTON Electronic Shelf Labels (ESLs) are components to a total SOLUM's ESL System. The SOLUM's ESL System consists of the ESLs, Gateway(s), Server, and optional accessories (such as the Newton Remote Controller) and is used to electronically displays key information such as price and product information, that are traditionally printed or written on paper in environments like supermarkets, warehouses, and factories.




SOLUM's Newton ESLs are the industry leading solutions that provide the longest battery life (up to 13 years), fastest update speed, built in LEDs, built in buttons, IP67 rating for rough environments, multiple pages per ESL, and more to take the operation beyond just displaying information on the ESLs. Newton ESLs come in various sizes and colors to meet all customer use cases. They are battery powered for ease of deployment and wirelessly receive updates from SOLUM Gateway for.

Specification

This section details specification of each ESL by size. ESLs are identified by the diagonal measurement of the display in inches. For example, a 3.52" ESL is referring to an ESL with the diagonal display dimension of 3.52".

Product Specification

| Item | Description |
|--------------------|---|
| Label Dimensions | 3.52": 3.43 x 1.68 x 0.47 inch (99.58 x 49.19 x 12.15 mm) |
| Display Dimensions | 3.52": 3.1 x 1.5inch (81.0 x 37.9 mm) |
| Display Resolution | 3.52": 384 x 180 Pixel (120dpi) |

| Item | Description |
|------------------------|--|
| Label Weight | 3.52": TBD |
| Viewing Angle | Nearly 180° |
| Display Colors |  BW (black, white)  BWR (black, white, red) BWY (black, white, yellow)  BWRY (black, white, red yellow) ** color options are not available for all sizes. See Section 3.XX for full list of options. |
| Battery | Type and quantity of batteries defer based on ESL 3.52": Battery Pack (CR2450 Lithium Battery 2EA) |
| Wireless Communication | 2.4 GHz Unlicensed ISM band SOLUM proprietary protocol FeliCa NFC Forum Type 3 (13.56MHz) NFC Passive Only |
| Communication Distance | 98 feet (30m) radius Line of Sight |
| Security | 128-bit AES Encryption |


| | |
|-----------------------|--|
| Compliance | FCC, CE, RoHS |
| Operating Temperature | Nominal ESLs BWR: 32F ~ 104F (0C ~ 40C) @45~70% RH BWY: 32F ~ 86F (0C ~ 30C) @ 45~70% RH BWRY: 32F ~ 104F (0C ~ 40C) @45~70% RH Freezer ESLs BW: -13F ~ 31F (-25C ~ 0C) *freezer ESL must be used in freezer environments |
| Storage Temperature | 32F ~ 104F (0C ~ 40C) @45~70% RH |

Radio (RF) Specification

| Item | Parameter | Specification | | | Unit | Condition |
|------|--------------------------------------|---------------|-----|-----|------|-------------------------------|
| | | Min | Typ | Max | | |
| Tx | Tx Power | -3 | 0 | 4 | dBm | |
| | [Carrier Frequency Offset and Drift] | -75 | 0 | 75 | kHz | |
| | Tx Current | | – | 8 | mA | total current at max Tx Power |
| Rx | Receiver Sensitivity | -85 | – | – | dBm | PER < 5% |

NFC Specification

| Item | Parameter | Specification | | | Unit | Condition |
|------|---------------|---------------|-----|-----|------|-----------|
| | | Min | Typ | Max | | |
| NFC | Read Distance | – | 0.7 | – | in | |
| | | – | 20 | – | mm | |

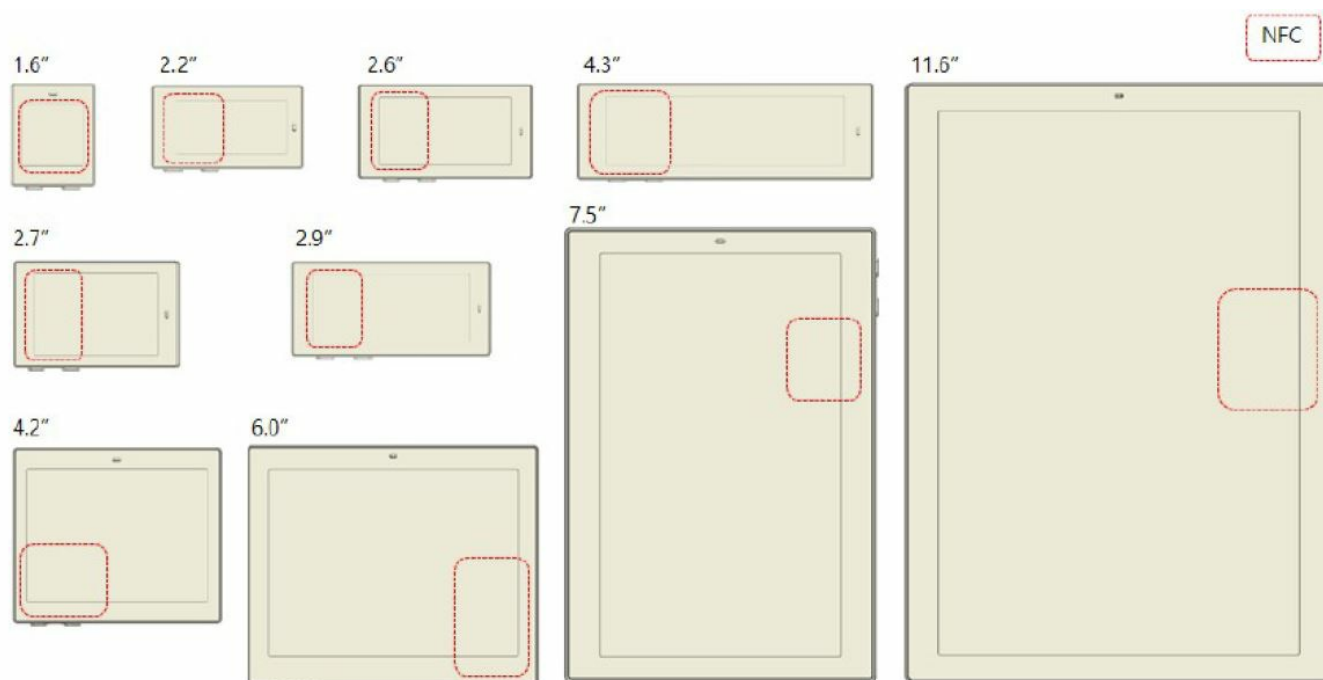

- NFC antenna location shown for each ESL size.

Product Handling Precautions

- Provisions should be made to protect against any damage to the product caused by improper handling. The purchaser assumes any responsibility for damage to the product caused by improper handling.
- Product should be stored in 32F ~ 104F (0C ~ 40C) @45~70% RH environment and should be installed within 90 days of receipt.

Usage Environment

- Take extra caution when using this RF device in the vicinity of other electronic devices and appliances. Most electronic devices and appliances use electromagnetic waves. Electromagnetic waves emitted by this RF device can affect other electronic devices and appliances.
- If using the device in an explosion hazard area, follow all safety regulations, instructions, and signals.

Storage and Use

- Moisture and liquids can damage internal parts and circuit boards if allowed to enter into the device itself.
- Do not place or store the product on a sloped surface. The product may slide and fall off the surface and become damaged.
- Use the product in temperatures ranges of 0°C~40°C/32~104°F(BWR), 0°C~30°C/32~86°F (BWY), 0°C~40°C/32~104°F(BWRY) or -25°C~0°C/- 13~32°F(Freezer). Parts and circuits may be damaged if operated or stored in extreme temperature.
- The display panel needs extra care during handling.
 - Do not apply any impacts on the e-Paper display as it is fragile.
 - Continuous exposure to excessive moisture (over 70% RH) or UV shortens display lifetime.
 - Ghosting image may appear in temperature conditions of less than 15°C/59°F for normal tags and -25°C/-13°F for freezer tags. (If $\Delta L^* > 2$, we call it ghosting phenomenon)
- Avoid areas with strong magnetism or subject to magnetism. Contact between the device and a magnetic object can lead to malfunctions.
- Do not place the product near heat-producing kitchen appliances like a stove or a microwave or in the vicinity of highly pressurized containers.
- External impact to the product, such as from being dropped, can damage the product.
- Twisting and bending the product can damage the exterior casing and the internal components.
- If this product operates abnormally while removing battery or replacing battery, it needs to be discharged by contacting the battery terminals (+) and (-) in the product.
- This product uses the 2.4GHz frequency band for the wireless communication network. Radio communications can be limited or affected by other applications that share the same frequency band, such as WiFi, Bluetooth, Zigbee, etc.
- A prior investigation into the radio environment is strongly required for efficient and smooth installation.
- Frequent communications, updates and screen renewals may reduce battery life time.
- Low temperature environments may reduce battery life.
- FIFO (First In First out)

Product Cleaning

For Spray Cleaning

Steps

1. Lightly spray all surfaces and wait a few seconds.
2. Gently wipe clean using a cloth or tissue.
3. Let the labels dry.

Notes

- Use mild, non-alcoholic detergents or glass cleaner.
- Recommend non-abrasive cloths: Microfiber, Cotton T-shirt, Cotton handkerchief, Cotton tea towel

For Wet Tissue Cleaning



Steps

1. Stand or lay down the labels.
2. Wipe using wet tissues.
3. Let the labels dry.

Battery Replacement

Audience

- Authorized personnel with the following knowledge are allowed to replace the battery:
 - Battery / Electronic assemblies (e.g. circuit board) / Compliance with the instruction

Note: Warranty is voided if battery is replaced by unauthorized personnel.

(When batteries require replacement, please contact the authorized personnel)

Instructions

- Risk of short circuit if battery is incorrectly installed/stored.
- Check that hands are dry before and at all times during the replacement process.
- Keep batteries away from children and infants.
- Do not heat, charge, bend, drop, short-circuit and/or disassemble battery.
- Do not mix together used and new batteries or different battery types.

Note: Battery rarely has minor stain or leak.

Steps

1. Open the battery cover.
2. Take out the batteries.
3. Put in the new batteries.
4. Check the batteries direction.
5. Put back in the battery cover.

Battery Directional

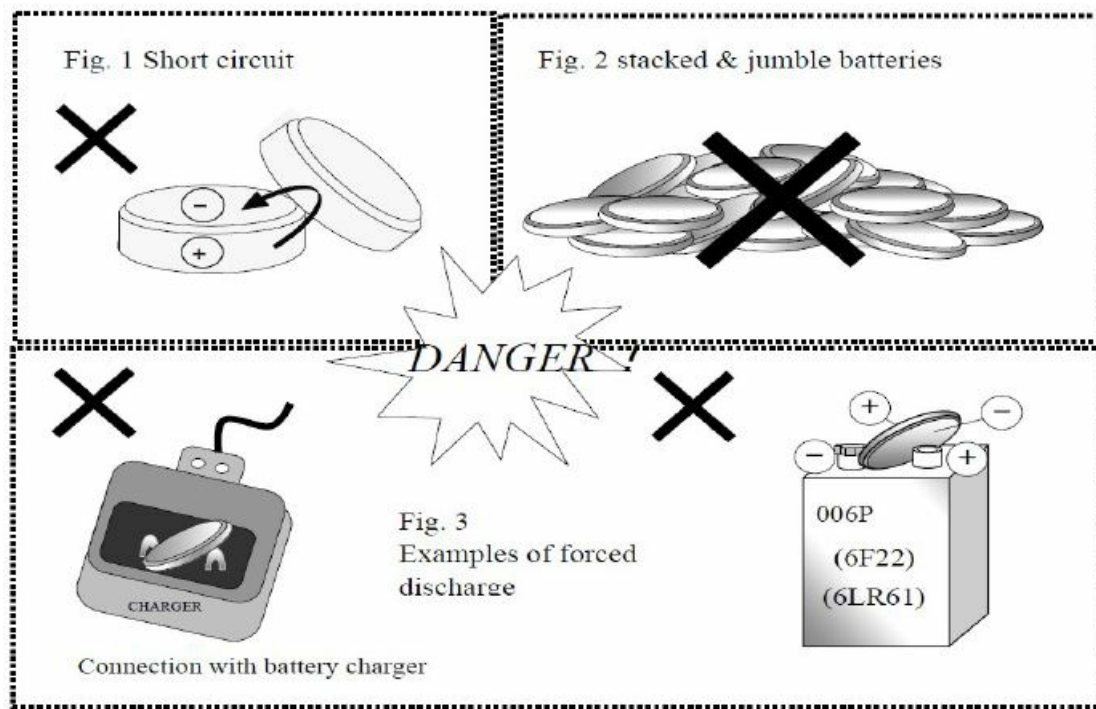


Figure 15. Battery Directional

- **Top:** (+) Positive
- **Bottom:** (-) Negative

Battery Handling Guide

Avoiding hazards in lithium battery handling



1. Do not short circuit (Fig. 1)
 - Direct connection of plus (+) and minus (-) poles may result in leakage, heat generation, explosion and/or fire.
 - Do not store and/or carry batteries with metallic items, such as a necklace.
2. Do not stack and/or jumble batteries (Fig. 2)
 - Stacked and/or jumbled batteries may cause a short circuit and/or forced discharge from contact with other batteries.
 - This may result in leakage, heat generation, explosion and/or fire.
3. Do not make forced discharge batteries (Fig. 3)
 - On a forced discharge by an external power source, the battery voltage goes to negative and this causes gas generation in inside of the battery.
 - This may result in leakage, heat generation, explosion and/or fire.
4. Do not dispose of batteries in fire
 - Disposal of batteries in fire is extremely dangerous with a risk of explosion and violent flaring.
5. Do not heat batteries
 - Heating batteries above 100°C/212°F may damage the resin in crimping, separator and other parts, potentially causing an electrolyte leak, internal short circuit, fire and/or explosion.
6. Do not solder directly onto batteries
 - Direct soldering onto batteries may damage the resin in crimping, separator and other parts, potentially causing an electrolyte leak, internal short circuit, fire and/or explosion.
7. Do not recharge batteries
 - Recharging of batteries may result in internal gas generation, causing electrolyte leak, battery swelling, fire and explosion.
8. Do not disassemble batteries
 - Disassembly of batteries may generate gas that may irritate your throat.
 - Lithium may also react with moisture to generate heat and fire.
9. Do not deform batteries

- Applying extreme pressure to batteries may cause deformation of the crimping and internal short circuit, causing electrolyte leak, battery swelling, fire and explosion.

10. Do not mix different type batteries

- For some applications, mixing different types of batteries or new and old batteries, can cause an overdischarge due to differences in voltage and discharge capacities.
- This may lead to the risk of swelling and/or explosion.











11. Do not insert batteries with opposite polarity

- For some applications, battery insertion with opposite polarity (reverse insertion of plus and minus) may result in leakage, heat generation, explosion and/or fire.

Please ensure the above precautions are strictly observed by related divisions including production, warehouse, product technology, sales, quality, customer stores, S/I companies, part-time workers, and external service companies.


Proper Storing and Disposing of Lithium Batteries

To minimize risk of fire and explosion of batteries, be sure to follow the instructions below.

| NG | Do not stack batteries | Do not stack batteries in a vinyl bags | Do not Short circuit | Do not make forced discharge batteries | |
|----|---|---|---|--|---|
| |  |  |  |  |  |
| OK | Using battery tray → Tape sealing | Tape attachment to "+/- electrodes | | | |
| |  |  |  |  |  |

Proper use of battery tray is outlined below

- With batteries properly placed into each tray slot → stack the trays in the same orientation → use an empty tray on the top stack → tape the stack together to avoid falling apart.

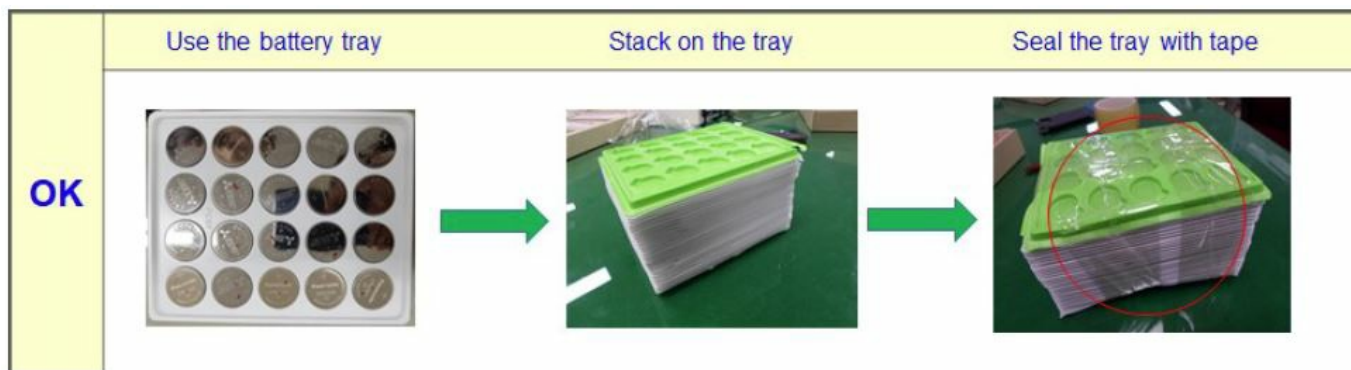

- Follow local regulations for proper battery disposal guideline.

FCC STATEMENT

FCC

FCC Information to User

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: THE GRANTEE IS NOT RESPONSIBLE FOR ANY CHANGES OR MODIFICATIONS NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

IMPORTANT NOTE: FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference
2. This device must accept any interference received, including interference that may cause undesired operation of the device.

ISED

ISED Information to User

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

1. This device may not cause interference
 2. This device must accept any interference, including interference that may cause undesired operation of the device
- PMN(Product Marking Name) ESL Label
 - FVIN(Firmware Version Identity Number) V28

CE


We hereby declare under our sole responsibility that the electrical product above is in compliance with the essential requirements of the Radio Equipment Directive (2014/53/EU) by application of

- EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013
- EN 62479:2010
- EN 301 489-1 V2.2.0
- EN 301 489-17 V3.2.0
- EN 300 328 V2.2.2

and the Directive (2011/65/EU) on the restriction of the use of certain hazardous substances in electrical and electronic equipment by application of EN 62321 Series. REV 1.1 SOLUM Traceability

- SOLUM CO., LTD
- A-Tower 6th Floor, 357 Guseong-ro, Giheung-gu, Yongin-si, Gyeonggi-do, Republic of Korea, 16914

Documents / Resources

| | |
|---|--|
|  | <p>SOLUM EL035F5C4C Newton Electronic Shelf Labels [pdf] Instructions EL035F5C4C, EL035F5C4C Newton Electronic Shelf Labels, Newton Electronic Shelf Labels, Electronic Shelf Labels, Shelf Labels, Labels</p> |
|---|--|

References

- [User Manual](#)

