

solus Fire Feature Manual

Home » solus » solus Fire Feature Manual



Contents

1 Fire Features

2

www.solusdecor.com

3 Related Posts

Fire Features

www.solusdecor.com

HEMI 36 MATCH LIT

NG & LP

Fire is beautiful and also dangerous if not handled properly. Please have a qualified gas fitter setup and install this product according to local codes.

This product has been tested and certified by Labtest Certification Inc. as being safe, as long as these **minimum clearances** to adjacent materials are maintained.

FOR OUTDOOR USE ONLY

NORTH AMERICA SPECIFICATIONS

Gas type: <u>Natural Gas</u> <u>Propane/But.</u>

Gas press: 3.5" – 7.0" w.c. N/A BTU: 73,500 73,500

ANSI Z21.97-2014



UK & EUROPEAN SPECIFICATIONS

Gas type: Natural Gas Propane/But.
Gas press: G20- 20mbar G30- 30mbar
Heat Out: G20/21.5 G30/21.5

EN 509:2000 EN 60335-1:2001


CONCRETE SPECS

Strength: 10,000 psi (proprietary)


Weight: 171 lbs / 78 kg

JOB / ORDER Name or Number:

Signature & Date:

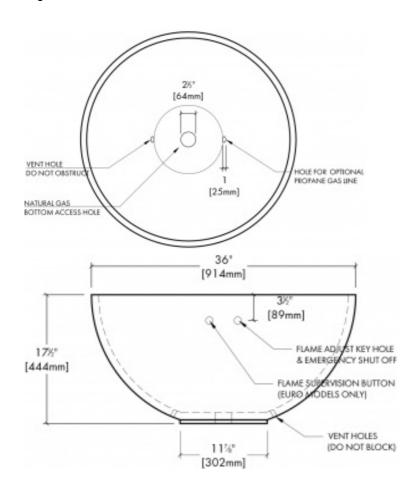



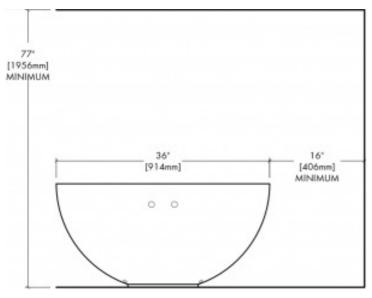

CLEARANCES to ADJACENT MATERIALS

solus Fire Feature Manual – <u>Download [optimized]</u> solus Fire Feature Manual – <u>Download</u>

Manuals+,