



Sound Control Technologies RC5-HST HuddleCamHD SimpliTrack Lite User Guide

[Home](#) » [Sound Control Technologies](#) » Sound Control Technologies RC5-HST HuddleCamHD SimpliTrack Lite User Guide 

Contents

- [1 Sound Control Technologies RC5-HST HuddleCamHD SimpliTrack Lite](#)
- [2 Product Usage Instructions](#)
- [3 Module Dimensions](#)
- [4 Documents / Resources](#)

Sound Control
Technologies

Sound Control Technologies RC5-HST HuddleCamHD SimpliTrack Lite



Product Information

Product Name: RC5-HSTTM – Application: HuddleCamHD SimpliTrackLite – Included Cables: RCC-C001-0.3M HDMItoHDMIVideoCable, RCC-C016-1.0M RJ45toRJ45ControlCable, PPC-022-0.3M DCPowerCable, RCC-H001-1.0M HDMItoHDMIVideoCable, RCC-C002-0.3M RJ45toRJ45ControlCable – Supported Devices: HDMI/DVI Device, 3rd Party UTP ControlDevice – SCTLink™ Cable: Used for Power, Control & Video transmission – SCTLink™ Cable Requirements: Must be a single, point-to-point CAT cable without any couplers or interconnections – SCTLink™ Cable Specs: – Integrator-Supplied CAT5e/CAT6 STP/UTP Cable – T568A or T568B Pinout – Minimum length: 10m – Maximum length: 100m

Power Supply Information:

Model: PS-1230VDC – Input Voltage: 100-240V – Frequency Range: 47-63Hz


Product Usage Instructions

1. Connect the RCC-C001-0.3M HDMItoHDMIVideoCable to the HDMI/DVI Device.
2. Connect the RCC-C016-1.0M RJ45toRJ45ControlCable to the 3rd Party UTP ControlDevice.
3. Connect the PPC-022-0.3M DCPowerCable to the power supply unit (PS-1230VDC).
4. Connect the RCC-H001-1.0M HDMItoHDMIVideoCable to the HuddleCamHD SimpliTrackLite.
5. Connect the RCC-C002-0.3M RJ45toRJ45ControlCable to the RC5-HSTTM.
6. Ensure the SCTLink™ Cable is a single, point-to-point CAT cable without any couplers or interconnections.
7. Use an integrator-supplied CAT5e/CAT6 STP/UTP Cable with T568A or T568B pinout for the SCTLink™ Cable.
8. Ensure the SCTLink™ Cable length is between 10m and 100m.
9. Follow the module dimensions for RC5-CETM and RC5-HETM as mentioned in the user manual.
10. Power on the PS-1230VDC power supply unit with an input voltage of 100-240V and frequency range of 47-63Hz.


Note: For any further assistance or troubleshooting, refer to the complete user manual or contact customer support.

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable T568A or T568B (10m-100m min/max Length)

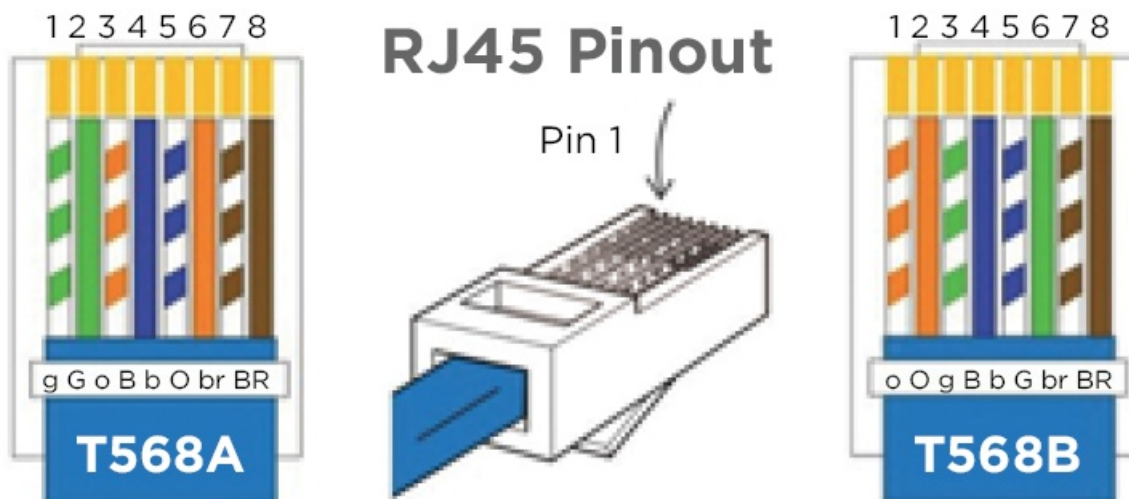


Module Dimensions

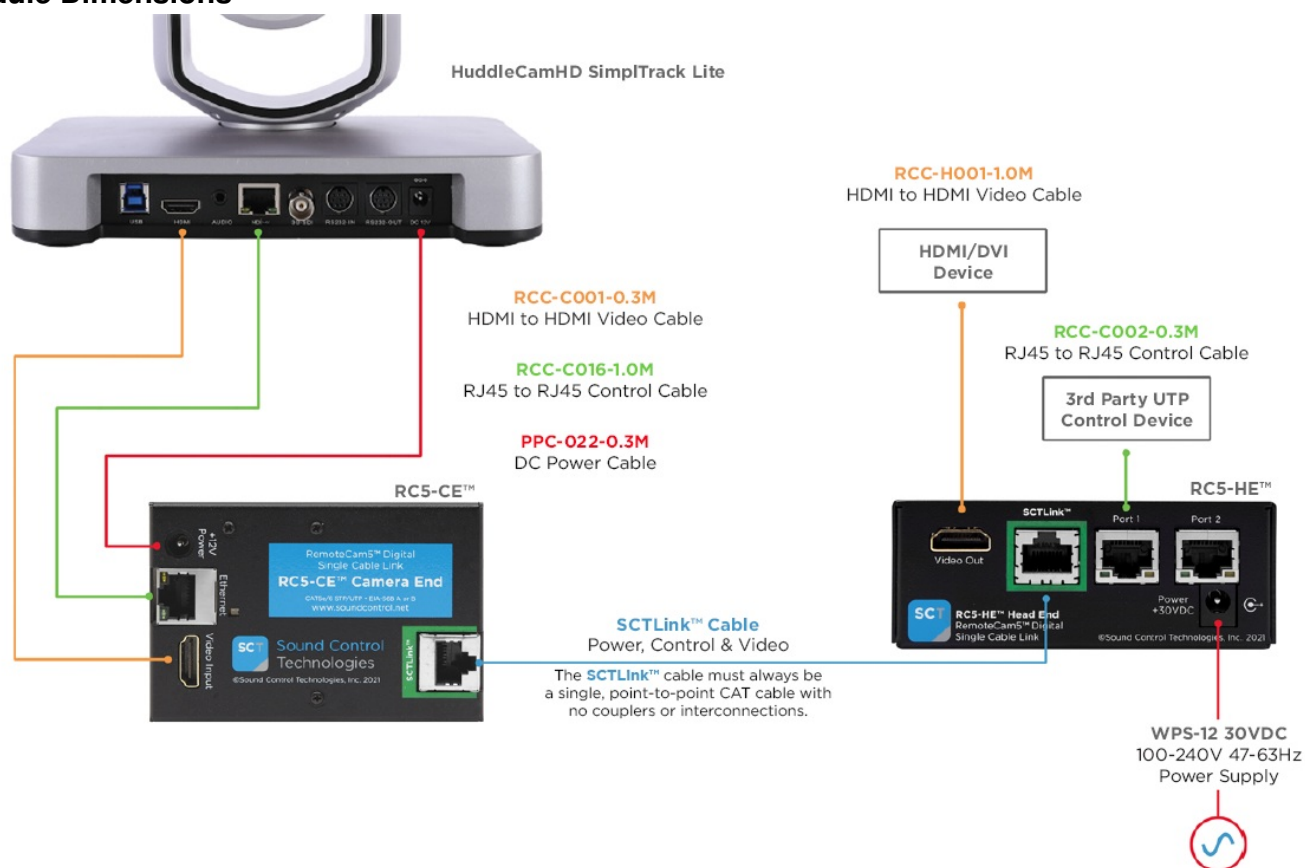

- RC5-CE™: H: 0.93" (23mm) x W: 2.5" (63mm) x D: 3.741" (95mm)
- RC5-HE™: H: 1.504" (38mm) x W: 3.813" (96mm) x D: 3.617" (91mm)

Documents / Resources



[Sound Control Technologies RC5-HST HuddleCamHD SimpliTrack Lite \[pdf\] User Guide](#)
RC5-HST HuddleCamHD SimpliTrack Lite, RC5-HST, HuddleCamHD SimpliTrack Lite, SimpliTrack Lite

