

Sound Control Technologies RCU2-A10 Supports Multiple Camera User Guide

[Home](#) » [Sound Control Technologies](#) » Sound Control Technologies RCU2-A10 Supports Multiple Camera User Guide 

Contents

1

Sound Control Technologies RCU2-A10 Supports Multiple Camera

2

Product Information

3

Product Usage Instructions

4

Models

5

Connections

6


Module Dimensions

7

Documents / Resources



Sound Control Technologies RCU2-A10 Supports Multiple Camera

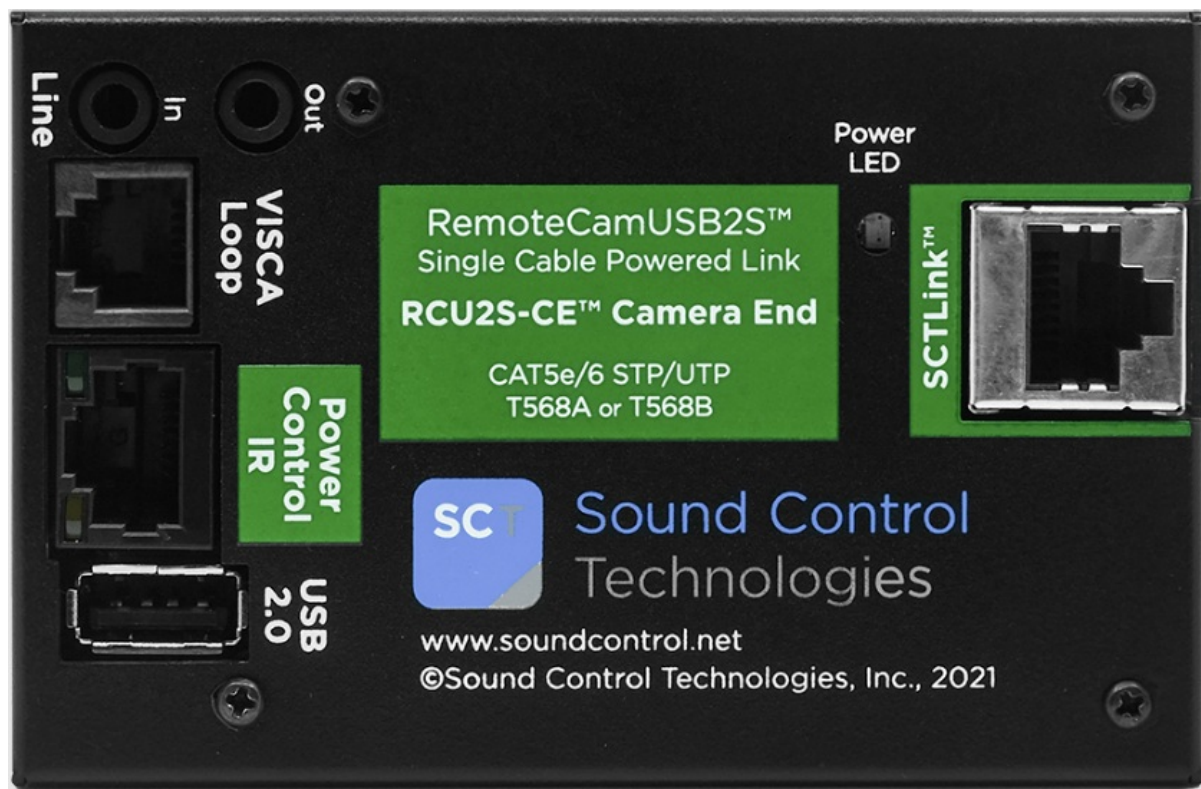

Product Information

The RCU2-A10™ is a USB application that supports multiple camera models, including the Lumens VC-TR1. It comes with two cable options: RCC-M004-1.0M USB-B (RCU2-HETM) to USB-A and RCC-M003-0.3M USB-A (RCU2-CETM) to USB-A. The module dimensions for RCU2-CETM are H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm), and for RCU2-HETM are H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm). The SCTLink™ cable is used for power, control, and video transmission.

Product Usage Instructions

1. Connect the appropriate RCU2 cable (RCC-M004-1.0M or RCC-M003-0.3M) to the USB port of your camera.
2. If using RCU2-CETM, connect the other end of the cable to a USB-A port on your device. If using RCU2-HETM, connect the other end to your laptop.
3. Ensure that the SCTLink™ cable is a single, point-to-point CAT cable without any couplers or interconnections.
4. If you need to supply your own SCTLink™ cable, use CAT5e/CAT6 STP/UTP cable with T568A or T568B pinout.
5. Connect one end of the SCTLink™ cable to the corresponding port on the RCU2 module.
6. Connect the other end of the SCTLink™ cable to the power, control, and video input/output ports as required.
7. If using a power supply, connect it to the RCU2-HETM module using the provided PS-1230VDC cable.
8. Ensure that the power supply is compatible with a voltage range of 100-240V and frequency range of 47-63Hz.


Note: For further details and specific instructions, please refer to the complete user manual.

Models

The RCU2-A10™ supports multiple camera models

- Atlona HDVS-CAM
- Atlona HDVS-CAM-HDMI
- Lumens VC-TR1
- Minnray UV401A
- Minnray UV570
- Minnray UV540
- VHD V60UL/V61UL/V63UL
- VHD V60CL/V61CL/V63CL


Connections

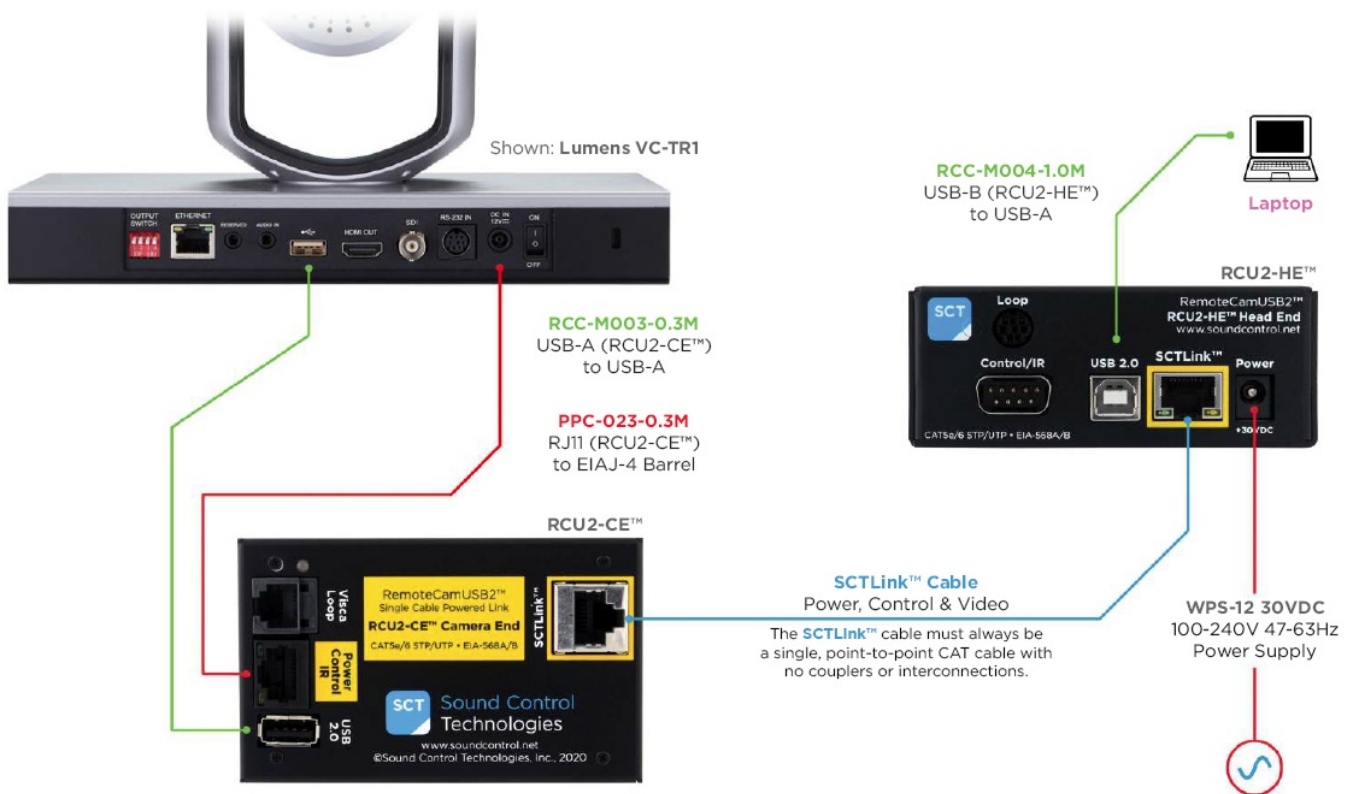

Module Dimensions


- **RCU2-CE™:** H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)
- **RCU2-HE™:** H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

SCTLink™ Cable Specs

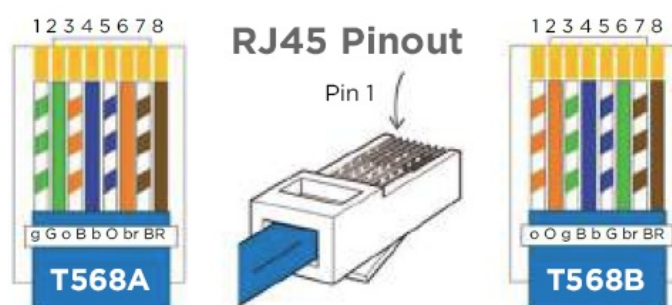

- Integrator-Supplied CAT5e/CAT6 STP/UTP Cable T568A or T568B (100m Max Length)

Documents / Resources



[Sound Control Technologies RCU2-A10 Supports Multiple Camera](#) [pdf] User Guide
RCU2-A10 Supports Multiple Camera, RCU2-A10, Supports Multiple Camera, Multiple Camera

Manuals+.