



Sound Control Technologies RCU2S-H00 Multiple Camera User Guide

[Home](#) » [Sound Control Technologies](#) » Sound Control Technologies RCU2S-H00 Multiple Camera User Guide

Contents

- 1 [Sound Control Technologies RCU2S-H00 Multiple Camera](#)
- 2 [Product Information](#)
- 3 [Product Usage Instructions](#)
- 4 [Models](#)
- 5 [Connections](#)
- 6 [Module Dimensions](#)
- 7 [Documents / Resources](#)



Sound Control Technologies RCU2S-H00 Multiple Camera



Product Information

- **Product Name:** RCU2S-H00TM USB
- **Application Guide:** Included in the user manual
- **Front Panel:** Field-Upgradeable microSD Slot
- **Laptop Compatibility:** Yes
- **Supplied Cable:** RCC-M004-1.0M USB-B (RCU2S-HETM) to USB-A ClearOne
- **Module Dimensions:**
 - RCU2S-CETM: H: 0.789(20mm) x W: 2.264(57mm) x D: 3.725(94mm)
 - RCU2S-HETM: H: 1.448(36mm) x W: 3.814(96mm) x D: 3.578(90mm)
- **SCTLink™ Cable:** Power, Control & Video
- **SCTLink™ Cable Requirements:**
 - Must always be a single, point-to-point CAT cable
 - No couplers or interconnections should be used
- **SCTLink™ Cable Specs:**
 - Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
 - T568A or T568B wiring standards
 - Maximum Length: 100m
- **RJ45 Pinout:**
 - T568A: 12345678 (oO gBbGbrBR)
 - T568B: 12345678 (gGoBbO brBR)
- **Power Supply:** W PS-1230VDC 100-240V 47-63Hz

Product Usage Instructions

1. Check the application guide included in the user manual for detailed instructions on using the RCU2S-H00TM USB.
2. Ensure compatibility with your laptop.
3. Connect the RCU2S-HETM module to your laptop using the supplied RCC-M004-1.0M USB-B to USB-A ClearOne cable.
4. If required, upgrade the front panel by using the field-upgradable microSD slot.
5. For power, control, and video connectivity, use the SCTLink™ cable.
6. The SCTLink™ cable must be a single, point-to-point CAT cable without any couplers or interconnections.
7. If you need to supply the SCTLink™ cable, use CAT5e/CAT6 STP/UTP cable with T568A or T568B wiring standards.
8. The maximum length of the SCTLink™ cable should not exceed 100m.
9. Refer to the RJ45 pinout information to correctly connect the cables using either T568A or T568B standards.
10. Use the provided power supply (W PS-1230VDC 100-240V 47-63Hz) for powering the device.


Models

The RCU2S-H00™ supports multiple camera models


- ClearOne Unite 20
- Huddlecam HC-WEBCAM-94

- Huddlecam HC-WEBCAM-104-v2
- Huddlecam HuddlePair (Camera Only)
- Huddlecam HC-GO-BK

Connections

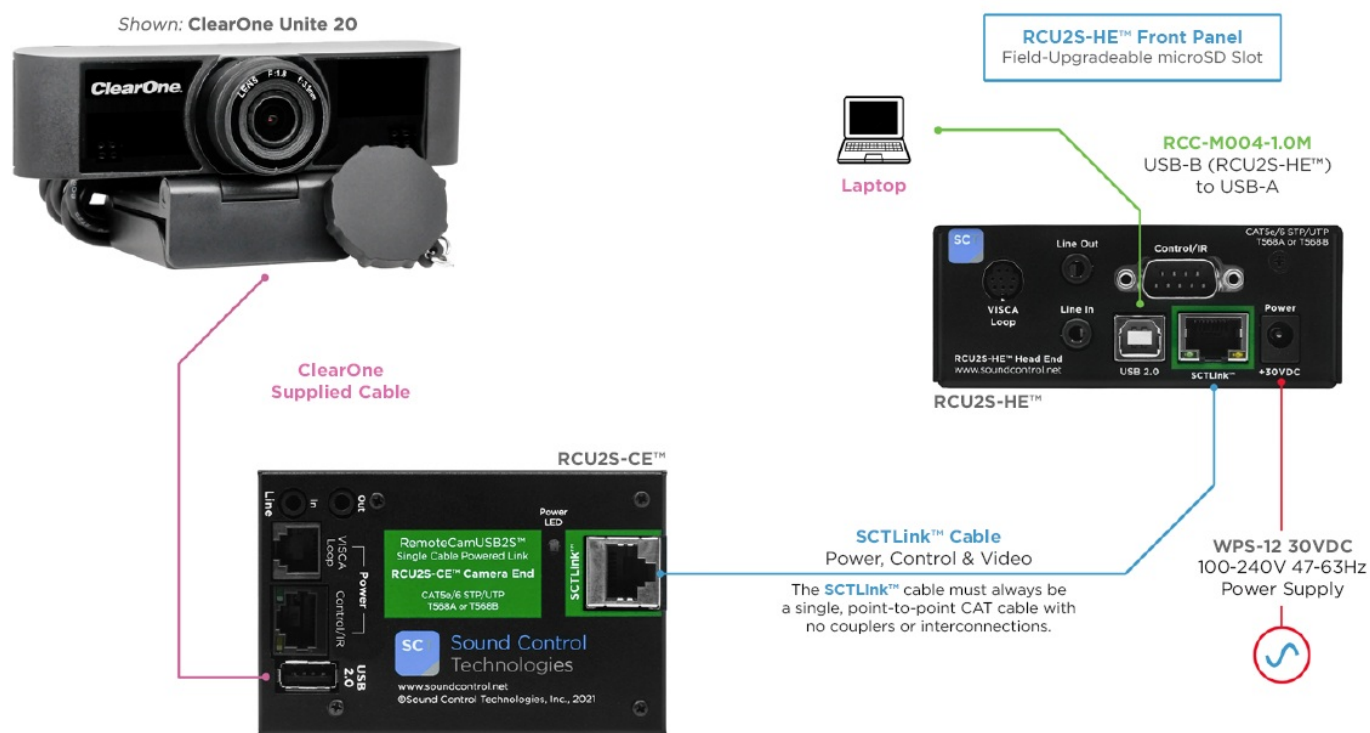

SCTLink™ Cable Specs

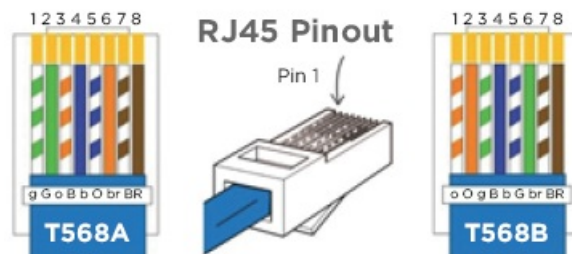

- Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
- T568A or T568B (100m Max Length)

Module Dimensions

- RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)
- RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

Documents / Resources



[Sound Control Technologies RCU2S-H00 Multiple Camera](#) [pdf] User Guide
RCU2S-H00 Multiple Camera, RCU2S-H00, Multiple Camera, Camera