



Sound Control Technologies RTK-PLUS Remote Table Kit User Guide

[Home](#) » [Sound Control Technologies](#) » Sound Control Technologies RTK-PLUS Remote Table Kit User Guide 

Contents

1

Sound Control Technologies RTK-PLUS Remote Table Kit

2

Product Usage Instructions

3

RemoteTableKit™ USB-PDI™ [RTK-PLUS™] Application Guide

4

Module Dimensions

5

Documents / Resources

5.1

References



Sound Control Technologies RTK-PLUS Remote Table Kit



Product Specifications

- Product Name: RemoteTableKit™ USB-PDITM [RTK-PLUSTM]

- Updated: 07/23/2024
- RTK-Transmitter™ Table Module
- RTK-Receiver™ Codec Module
- Dimensions:
 - RTK-TXTM: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)
 - RTK-RXTM: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)

Product Usage Instructions

Setup Requirements

Before using the RemoteTableKit™, ensure you have the following components:

- RTK-Transmitter™ Table Module
- RTK-Receiver™ Codec Module
- SCTLink™ Cable
- Laptop with USB-C Power Supply
- Cisco Microphones (optional)

Connection Steps

Follow these steps to set up the RemoteTableKit™:

1. Connect the RTK-Transmitter™ to your laptop using the provided USB-C to USB-C cable (RCC-M015-2.0M).
2. Connect the RTK-Transmitter™ to the RTK-Receiver™ using the SCTLink™ Cable (CAT5e/CAT6).
3. If using Cisco Microphones, connect them to the Cisco Touch10/Navigator Ethernet/POE using compatible cables.
4. Power up the system with the WPS-USBC-65W USB-C Power Supply.

Frequently Asked Questions (FAQ)

- **Q: Can I use couplers or interconnections with the SCTLink™ cable?**


A: No, the SCTLink™ cable must always be a single, point-to-point CAT cable without couplers or interconnections for proper functionality.

- **Q: What are the supported Cisco products for use with RemoteTableKit™?**

A: The RemoteTableKit™ supports Cisco Codec Plus, Room 55, Room 55 Dual, Room 70 G1, and Room 70 Dual G1 for seamless integration.


RemoteTableKit™ USB-PDI™ [RTK-PLUS™] Application Guide

Updated: 07/23/2024

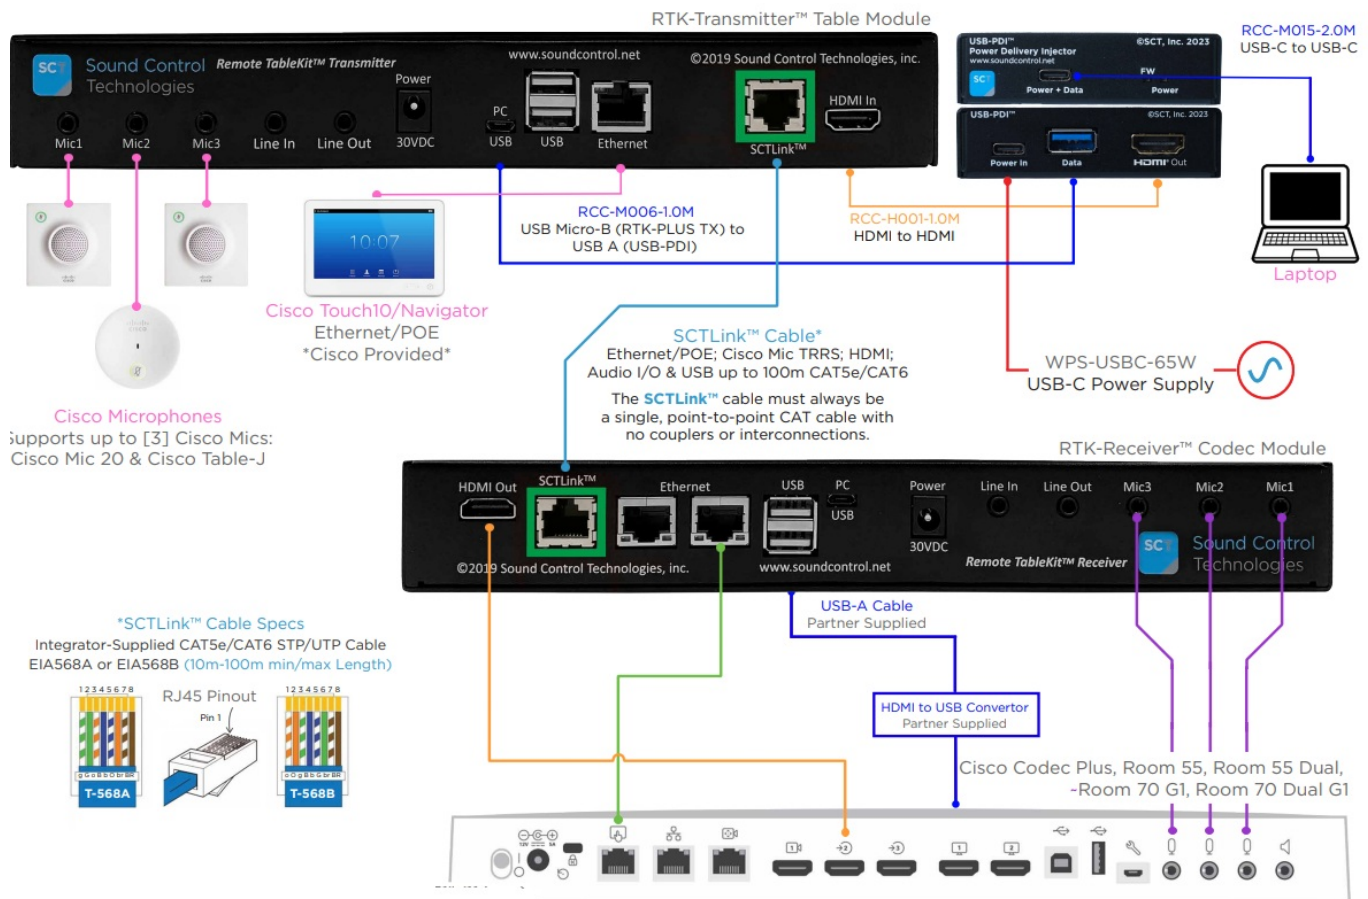

*SCTLink™ Cable Specs


Integrator-Supplied CAT5e/CAT6 STP/UTP Cable EIA568A or EIA568B (10m-100m min/max Length)

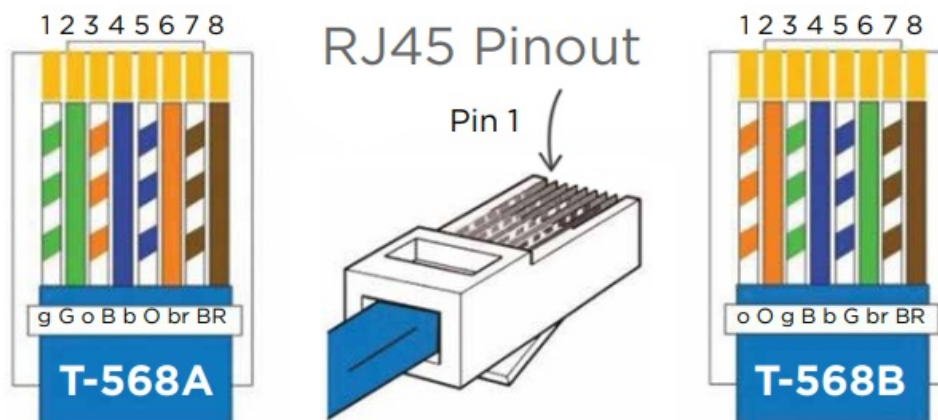

Module Dimensions

- RTK-TX™: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)
- RTK-RX™: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)

Documents / Resources



[Sound Control Technologies RTK-PLUS Remote Table Kit](#) [pdf] User Guide
RTK-PLUS, RTK-PLUS Remote Table Kit, Remote Table Kit, Table Kit, Kit

References

- [User Manual](#)

Manuals, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.