



Sound Control Technologies RTK-PRO Remote Table Kit Pro User Guide

[Home](#) » [Sound Control Technologies](#) » Sound Control Technologies RTK-PRO Remote Table Kit Pro User Guide 

Contents

- [1 Sound Control Technologies RTK-PRO Remote Table Kit Pro](#)
- [2 Product Information](#)
- [3 Module Dimensions](#)
- [4 Product Usage Instructions](#)
- [5 Application Guide](#)
- [6 Cable Specs](#)
- [7 Dimensions](#)
- [8 Documents / Resources](#)



Sound Control Technologies RTK-PRO Remote Table Kit Pro



Product Information

The RemoteTableKit™ (RTK-PRO™) is an application guide for the RTK-Transmitter™ Table Module and RTK-Receiver™ Codec Module. It includes RM-PRO™ Adaptors that are male TRRS to Euro-Block connectors. The kit also includes adaptors, USB 2.0 device (client), and supports up to three Cisco microphones, such as CiscoTableMic20, 60, J&E. The SCTLINK™ Cable is used for Ethernet/POE, Cisco Mic TRRS, HDMI, audio I/O, and USB connections up to 100m CAT5e/CAT6.

SCTLink™ Cable Specs

- **Integrator-Supplied** CAT5e/CAT6 STP/UTP Cable EIA568A or EIA568B pinout
- **Cable length:** 10m-100m minimum/maximum length

Please note that the SCTLink™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

Module Dimensions


- **RTK-TXTM: H:** 1.39" (35mm) x **W:** 10.22" (259mm) x **D:** 4.51" (114mm)
- **RTK-RXTM: H:** 1.39" (35mm) x **W:** 10.22" (259mm) x **D:** 4.51" (114mm)

Product Usage Instructions

1. Connect the RTK-Transmitter™ Table Module to the RTK-Receiver™ Codec Module using the SCTLink™ Cable.
2. Ensure that the SCTLink™ Cable used is a single, point-to-point CAT5e/CAT6 cable without any couplers or interconnections.
3. If using Cisco microphones, connect them to the RTK-Transmitter™ Table Module. Up to three Cisco microphones are supported.
4. For USB connections, use the RM-PRO™ Adaptors to convert the male TRRS connectors to Euro-Block connectors.
5. If using a laptop, connect it to the RTK-Receiver™ Codec Module using an HDMI cable.
6. If using a Cisco Touch10, connect it to the RTK-Receiver™ Codec Module via Ethernet/POE. The Cisco Touch10 should be provided by Cisco.
7. Ensure that the 48V Phantom power is disabled on any microphone input of the codec that is connected to the RTK-PRO™. Failure to do so may result in long-term failure of the RTK-PRO™ microphone audio channel(s) and will void the warranty.
8. The RTK-PRO™ is compatible with Cisco SX80, Codec Pro, Room 70, Room 70G2, Room 70DualG2, and Room Kit Pro.

Application Guide


RemoteTableKit™RTK-PRO™ Application Guide

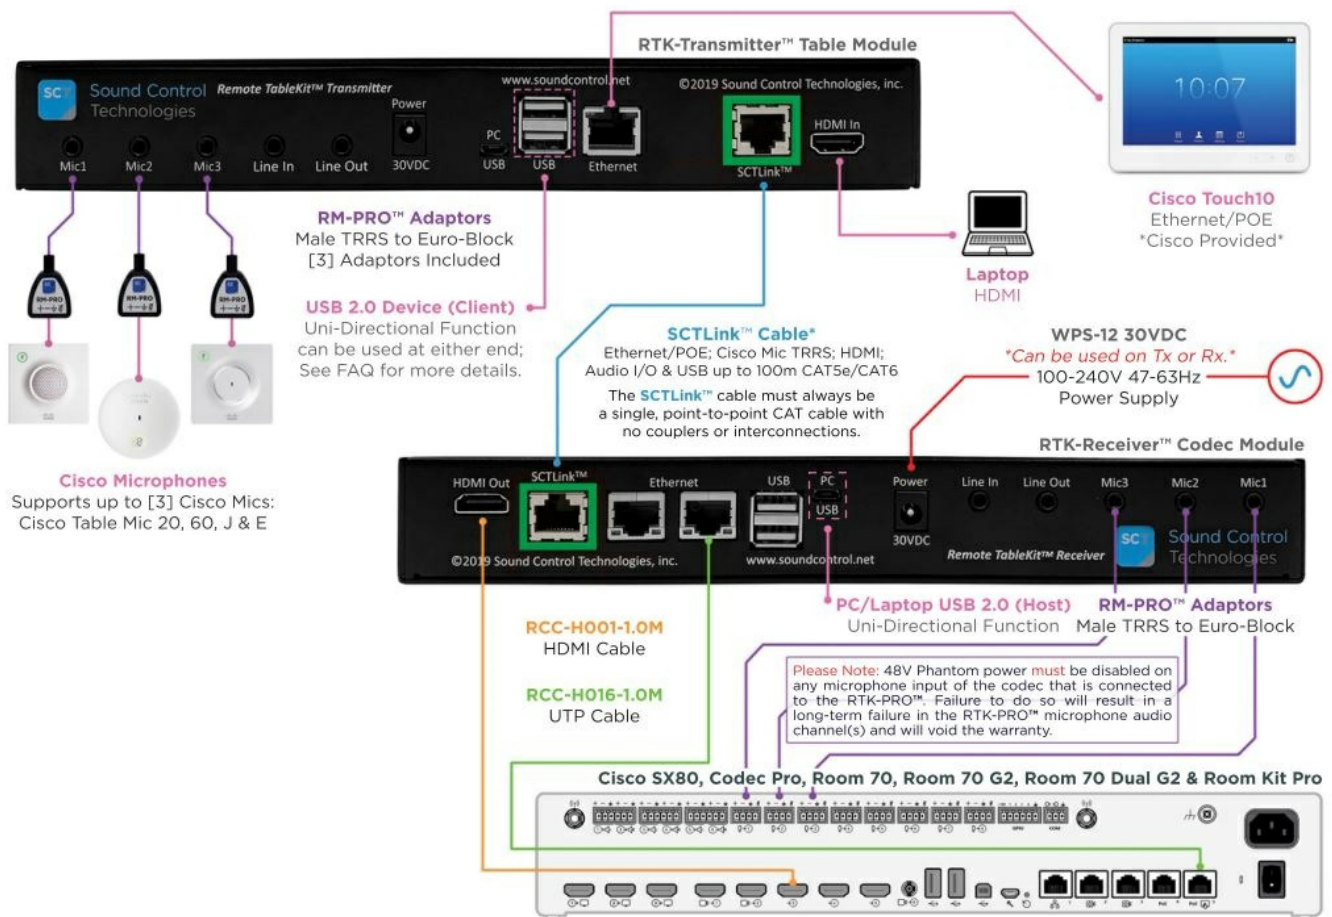

Cable Specs

SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6STP/UTP Cable EIA568A or EIA568B (10m-100m min/max Length)

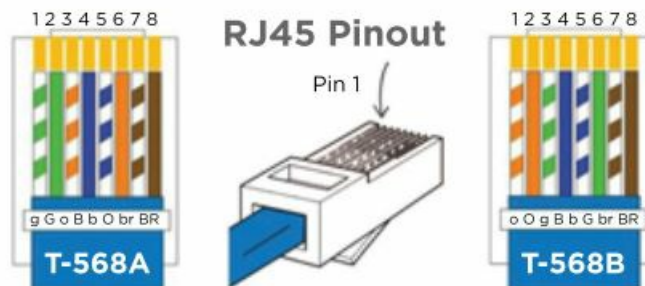


Dimensions

Module Dimensions

- **RTK-TX™:** H: 1.39"(35mm) x W: 10.22"(259mm) x D: 4.51"(114mm)
- **RTK-RX™:** H: 1.39"(35mm) x W: 10.22"(259mm) x D: 4.51"(114mm)

Documents / Resources



[Sound Control Technologies RTK-PRO Remote Table Kit Pro](#) [pdf] User Guide
RTK-PRO Remote Table Kit Pro, RTK-PRO, Remote Table Kit Pro, Table Kit Pro, Kit Pro

Manuals+.