



Sound Control Technologies USB3-1X2-031 Supports Multiple Camera User Guide

[Home](#) » [Sound Control Technologies](#) » Sound Control Technologies USB3-1X2-031 Supports Multiple Camera User Guide 

Contents

- [1 Sound Control Technologies USB3-1X2-031 Supports Multiple Camera](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 FEATURES](#)
- [5 Camera Models](#)
- [6 Application Guide](#)
- [7 Dimensions](#)
- [8 Documents / Resources](#)



Sound Control Technologies USB3-1X2-031 Supports Multiple Camera



Product Information

The USB3-1×2-031TM is a device that supports multiple camera models and provides control input options. It comes with a power supply, USB cables, and optional third-party controller compatibility.

- **Model:** USB3-1×2-031TM
- **Supported Camera Models:** AVerCam550, PPC-031-1.0M
- **Power Supply:** W PS-1230VDC 100-240V 47-63Hz
- **Module Dimensions:** H: 1.07" (27mm) x W: 3.81" (96mm) x D: 3.58" (90mm)

Product Usage Instructions

To use the USB3-1×2-031TM, follow these steps:

1. Connect the Integrator Supplied USB Cable to the USB3-1×2-031TM module.
2. Connect the Power Supply (W PS-1230VDC 100-240V 47-63Hz) to the USB3-1×2-031TM module.
3. If using a third-party controller, connect it to the USB3-1×2-031TM module using the appropriate cable (e.g., Laptop RCC-M008-1.0M USB Cable).
4. If using the AVerCam550 or PPC-031-1.0M camera, connect it to the USB3-1×2-031TM module using the provided Camera Power Cable (PPC-031-1.0M).
5. Configure the DIP Switches on the USB3-1×2-031TM module based on your desired control input:
 - If DIP Switch 1 is on and DIP Switch 2 is off, the control input will be momentary.
 - If DIP Switch 2 is on, the control input will be latching.
6. Connect the USB3-1×2-031TM module to your room PC using the RCC-M008-1.0M USB Cable.

Once the USB3-1×2-031TM is properly connected and configured, it can be used to control the supported camera models using the specified control input method.

FEATURES



- **ForUSB3-1×2-031™:** DIPSwitch1On
- **DIPSwitch2Off:** MomentaryControlInput
- **DIPSwitch2On:** LatchingControlInput

Camera Models


TheUSB3-1×2-031™supports multiple camera models:

- 1BeyondAutoFinder
- 1BeyondAutoFramer
- AVerVB342+
- AVerCAM540
- AVerCAM520Pro
- AVerCAM520Pro2
- AVerCAM520ProAdvanced
- AVerVC520PRO

- AVerVC520PRO2
- AVerCAM550
- HuddleCam HC3X
- HuddleCam HC10XUSB2
- HuddleCam HC10XAUSB2
- HudddleCam HuddleView
- HuddleViewHC20XSIMPTRACK2
- HuddleCam SimplTrackLite

Application Guide

USB3-1x2™ Application Guide

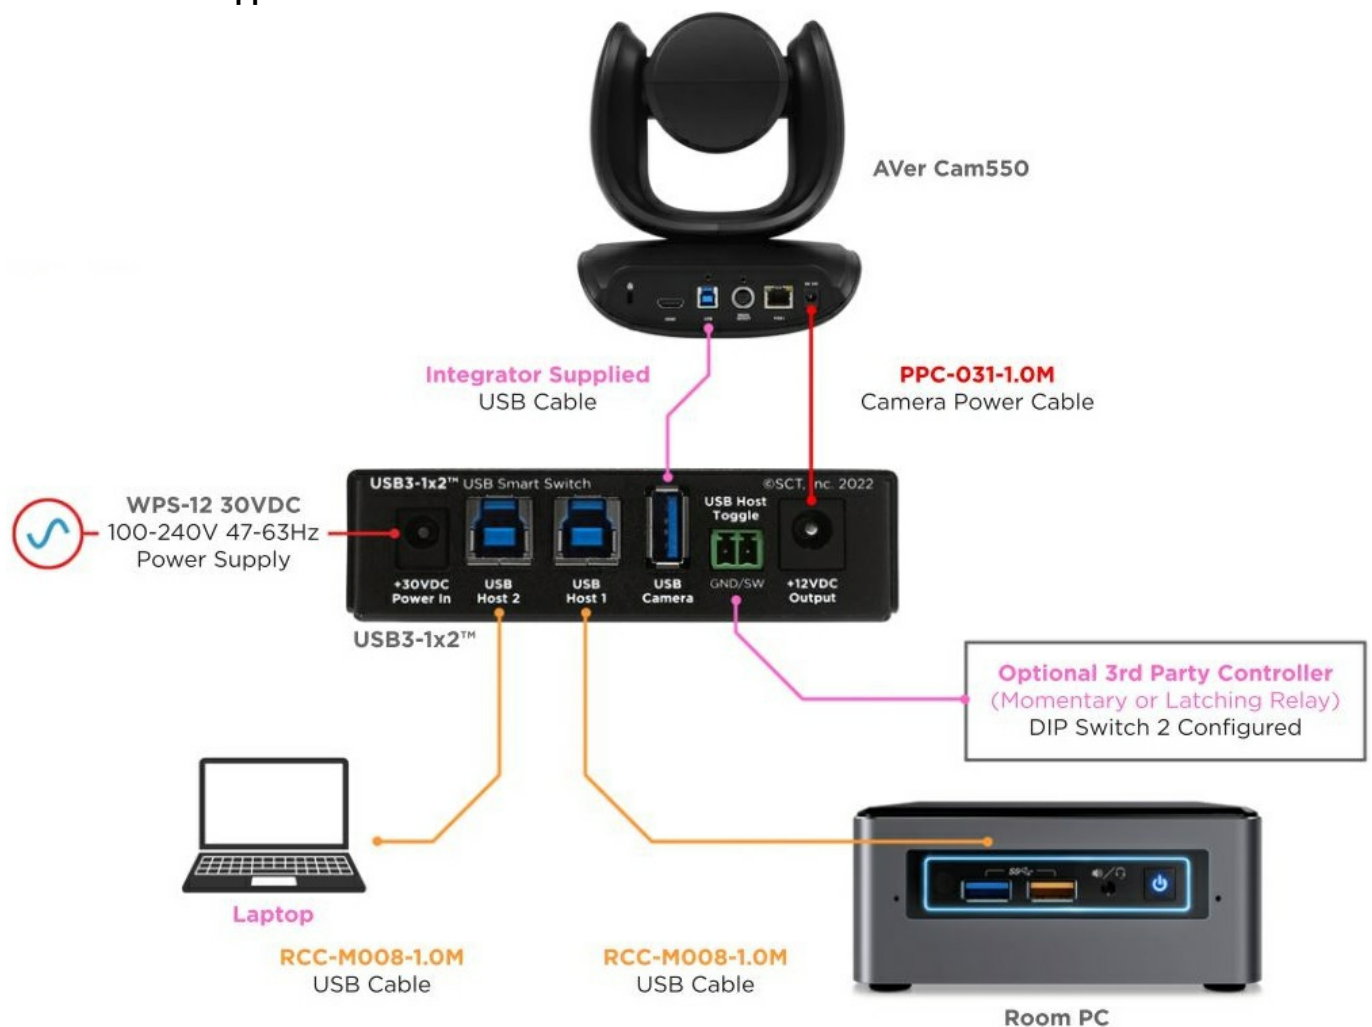

Dimensions

Module Dimensions

- **USB3-1x2™:**
- **H:** 1.07"(27mm)x
- **W:** 3.81"(96mm)x
- **D:** 3.58"(90mm)

Documents / Resources



[Sound Control Technologies USB3-1X2-031 Supports Multiple Camera](#) [pdf] User Guide
USB3-1X2-031 Supports Multiple Camera, USB3-1X2-031, Supports Multiple Camera, Multiple
Camera, Camera