



Soundking GL26A Active Line Array Speaker User Manual

[Home](#) » [Soundking](#) » Soundking GL26A Active Line Array Speaker User Manual 

Soundking GL26A Active Line Array Speaker User Manual



Contents

- 1 **IMPORTANT SAFETY SYMBOLS**
- 2 **IMPORTANT SAFETY INSTRUCTIONS**
- 3 Introduction
- 4 Features
- 5 Function Introduction
- 6 Specification
- 7 DSP Function Introduction
- 8 Documents / Resources
- 9 Related Posts

IMPORTANT SAFETY SYMBOLS



Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.



The symbol is used to indicate that some hazardous live terminals are involved within this apparatus, even under the normal operating conditions, which may be sufficient to constitute the risk of electric shock or death.



The symbol is used in the service documentation to indicate that specific component shall be replaced only by the component specified in that documentation for safety reasons.



Protective grounding terminal



Alternating current/voltage



Hazardous live terminal

ON: Denotes the apparatus is turned on

OFF: Denotes the apparatus is turned off.

WARNING: Describes precautions that should be observed to prevent the danger of injury or death to the operator.

CAUTION: Describes precautions that should be observed to prevent danger of the apparatus.

IMPORTANT SAFETY INSTRUCTIONS

- Read these instructions.
- Keep these instructions.

- Heed all warning.
- Follow all instructions.

- **Water & Moisture**

The apparatus should be protected from moisture and rain, can not used near water, for example: near bath-tub, kitchen sink or a swimming pool, etc.

- **Heat**

The apparatus should be located away from the heat source such as radiators, stoves or other appliances that produce heat.

- **Ventilation**

Do not block areas of ventilation opening. Failure to do could result in fire. Always install accordance with the manufacturer's instructions.

- **Object and Liquid Entry**

Objects do not fall into and liquids are not spilled into the inside of the apparatus for safety.

- **Power Cord and Plug**

Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.

Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong is provided for your safety. If the provided plug does not fit into your outlet, refer to electrician for replacement.

- **Power Supply**

The apparatus should be connected to the power supply only of the type as marked on the apparatus or described in the manual. Failure to do could result in damage to the product and possibly the user.

Unplug this apparatus during lightning storms or when unused for long periods of time.

Where the MAINS plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.

- **Fuse**

To prevent the risk of fire and damaging the unit, please use only of the recommended fuse type as described in the manual. Before replacing the fuse, make sure the unit turned off and disconnected from the AC outlet.

- **Electrical Connection**

Improper electrical wiring may invalidate the product warranty.

- **Cleaning**

Clean only with a dry cloth. Do not use any solvents such as benzol or alcohol.

- **Servicing**

Do not implement any servicing other than those means described in the manual. Refer all servicing to qualified service personnel only.

- Only use accessories/attachments or parts recommended by the manufacturer.

Introduction

GL series is a multi-purpose active coaxial line array speaker, which is mainly used in occasions with high requirements for sound quality. The main speaker and subwoofer adopt active integrated design, and the speaker is small in size and light in weight. Built-in DSP module have gain, frequency division, equalization, delay, limit, program memory and other functions. With a number of preset calls, the DSP module control all speakers network through the 485 network interface. The speaker cabinet is convenient to install and can be adjusted

independently. This series may adapt many kinds of sound reinforcement projects.

Application: touring show, large/medium/small stadium, theatre and auditorium, etc

Features

1. The main speaker GL26A is small and light. The combination with great dynamic margin uses eight 1 inch neodymium dome HF unit and two 6.5 inch neodymium MF/LF unit. The sound degree is as high as 129dB. The treble coaxial array is arranged above the mid bass, so that the sound image positioning is more accurate, and the far-field sound field uniformity and clarity are improved.
2. The main speaker adopts 400W+150W efficiency D power amplifier, with high power and low distortion. Built-in powerful 24bit DSP speaker processing module have gain, crossover, equalization, delay, limit, program memory and other functions.
3. Equipped with 1200W high-power single 15 inch active ultra-low frequency speaker GL26SA, it can enhance the low-frequency limit.
4. Factory built-in multiple preset, plug and play. All speakers can be controlled online through 485 network.
5. Flexible multi-combination application, including hanging, stacking and supporting, can meet the requirements of sound reinforcement projects.

response, eight 1 inch HF compression units and two 6.5 inch MF/LF units offer high headroom. The treble coaxial array is arranged above the mid bass, so that the sound image positioning is more accurate, and the far-field sound field uniformity and clarity are improved. Each speaker cabinet has a independently high power power amp and DSP. The speaker cabinet can be adjusted independently. The speaker cabinet quantity can be configured according to actual requirements. The GL26A power amp uses high efficiency switching mode power supply, DSP module, for crossover, EQ, limit, delay, volume functions. DSP can be operated on the panel.

The line array cabinets are trapezoidal to reduce the gap between two cabinets to minimum, thus to reduce the useless sound area, and to minimize the side lobe. The line array uses accurate AI suspension system. The cabinet angle can be adjusted in a range 0°- 8°to meet the requirement of different applications.

The GL26SA line array cabinets features 70Hz-20KHz frequency, one 15 inch high power woofer. The speaker cabinet has a independently high power power amp and DSP. The speaker cabinet can be adjusted independently. The speaker cabinet quantity can be configured according to actual requirements.

The GL26A power amp uses high efficiency switching mode power supply, DSP module, for crossover, EQ, limit, delay, volume functions. DSP can be operated on the panel.

The GL26A enclosure uses accurate AI suspension system to meet the requirement of different applications. Two handles are designed for easy transportation.

Application:

- touring show
- large/medium/small stadium
- theatre and auditorium, etc


Function Introduction

GL26A Panel




1. LED
2. line input
3. volume
4. parallel connection
5. cable interface
6. AC input
7. AC output

GL26SA Panel

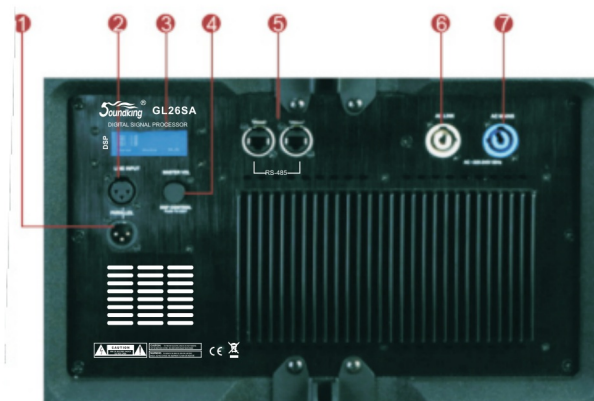

1. parallel connection
2. line input
3. LED
4. DPS controller
5. cable interface
6. AC output
7. AC input

Installation method of hanger

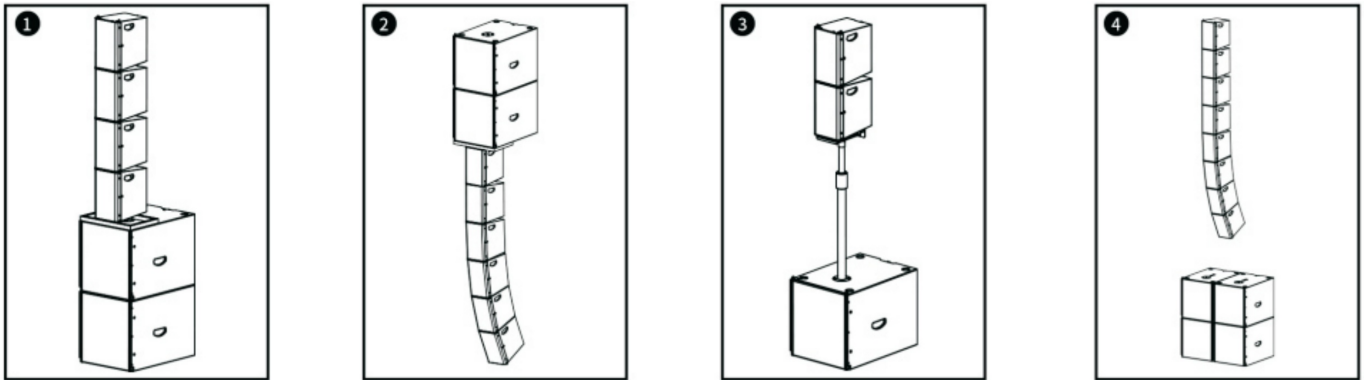

Specification

Model: GL26A

- **Type:** 2-way active line array full frequency
- **Frequency response:** 70Hz-20kHz
- **Horizontal coverage(-6dB):** 120°
- **Vertical coverage(-6dB):** 8°
- **LF unit:** 2×6.5" ferrite middle and bass unit
- **HF unit:** 8×1"compression driver
- **Amp power:** 400W+150W
- **Max SPL:** 129dB
- **Input sensitivity:** 0dB
- **Voltage:** 230V/115V
- **Dimension:** (WxHxD) 205x354x340 (mm)
- **Weight:** 8.5kg

Model: GL26SA

- **Type:** active signal 15"ultralow frequency
- **Frequency response:** 40Hz-150kHz
- **LF unit:** 1×15" ferrite bass unit
- **Amp power:** 1200W
- **Max SPL:** 130dB
- **Input sensitivity:** 0dB
- **Voltage:** 230V
- **Dimension (WxHxD):** 474x506x673 (mm)
- **Weight:** 41kg
- **Material:** Birch plywood

DSP Function Introduction

GL26A

LEVEL 00dB	←	Level adjustment: -60dB~00dB
IN 	←	Level indication: level/limit/clip indication
EXIT	←	Exit
MODE: NORMAL	←	Mode: HF 0dB, HF+3dB, HF+6dB, HF-3dB, custom
LOW OUT: OFF	←	Low cut: OFF、80、100、120、150
HIGH EQ: 0dB	←	HF Eq: ±12dB
MID EQ: 0dB	←	MF Eq: ±12dB
LOW EQ: 0dB	←	LF Eq: ±12dB
DELAY: OFF	←	Input delay: 0~16mS
LCD DIM: ON	←	LCD DIM: ON-OFF
BRIGHT: 5	←	Contrast: 0~10
CONTRAST: 5	←	Bright: 0~10
ADDRESS: 1	←	RS-485 Address: 0~255
RESET	←	Reset
INFO	←	Production information
EXIT	←	Exit

GL26SA

LEVEL 00dB	←	Level adjustment -60~00dB
IN 	←	Level indication: level/ limit/ clip indication
EXIT	←	Exit
MODE: NORMAL	←	Mode: normal、 outdoor、 custom
DELAY: OFF	←	Input delay: 0~16mS
LCD DIM: ON	←	LED DIM: ON-OFF
BRIGHT: 5	←	Contrast: 0~10
CONTRAST: 5	←	Bright: 0~10
ADDRESS: 1	←	RS-485 address: 0~255
RESET	←	Reset
INFO	←	Product information
EXIT	←	Exit

SOUNDKING AUDIO

WWW.SOUNDKING.COM

All rights reserved to SOUNDKING.

No part of this manual may be reproduced, translated or photocopied by any means for any purpose, without the written permission of SOUNDKING. The information involved in this manual is subject to change without notice.



Documents / Resources



[Soundking GL26A Active Line Array Speaker](#) [pdf] User Manual

GL26A, GL26SA, GL26A Active Line Array Speaker, Active Line Array Speaker, Line Array Speaker, Array Speaker, Speaker

[Manuals+](#).