



SparkLAN WPEQ-276AX 6GHz Single Band Mini PCIe Module User Guide

[Home](#) » [SparkLAN](#) » SparkLAN WPEQ-276AX 6GHz Single Band Mini PCIe Module User Guide 

SparkLAN WPEQ-276AX 6GHz Single Band
Mini PCIe Module User Guide

Distributed by www.texim-europe.com



 **Wireless Module**

WPEQ-276AX

WiFi 6E (802.11ax) 2x2 MU-MIMO

6GHz Single Band Mini PCIe Module



802.11ax with MU-MIMO 2x2 Solution

The first WiFi-6E (802.11ax) Qualcomm based AP solution on module formfactor from SparkLAN. WPEQ-276AX, is based on QCN9072 chipset solution. This is a true enterprise based wireless module that powers 2T2R (2x2) MU-MIMO, in 6Ghz Single band mode, hitting a theoretical speed of up to 2.4Gbps with 160MHz support.

Unlike typical Qualcomm reference design around QCN9072, WPEQ-276AX shrink the traditional 50mmx50mm M.2 E-Key design to a more popular Mini PCIe Full size formfactor of just 50mm x 30mm, run at 3.3V voltage. Provides a greater versatility to use on more common seen design.

WPEQ-276AX performs both AP and STA functionality with 2 spatial streams, although recommended more for hardware AP applications as it supports 4096-QAM, OFDMA technology, makes it perfect for heavy lifting

applications such as Enterprise grade AP, UTM, public & transportation Hotspot, and other industrial capable Access Points.

Embedded Application

Applications include Multimedia Router and AP solution., etc.

Key Feature

- 6GHz, 2×2 MU-MIMO OFDMA Technology, up to 4804Mbps physical data rate
- Single Band 6GHz 2×2 Wi-Fi 6E (802.11ax)
- 2 spatial streams (2SS)
- Perfect for AP solutions
- Support standard full size Mini PCIe module

Contents

- [1 Specification](#)
- [2 OUTPUT POWER & SENSITIVITY](#)
- [3 Block Diagram](#)
- [4 Mechanical Dimension \(mm\)](#)
- [5 MHF1 connector spec.](#)
- [6 Pin Assignment](#)
- [7 Certification](#)
- [8 Ordering Information](#)
- [9 Optional Accessory](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)


Specification

Standards	IEEE 802.11ax 2T2R 6G
Chipset	Qualcomm Atheros QCN9072
Data Rate	802.11ax: HE0~11
Operating Frequency	IEEE 802.11ax 5.925~7.125GHz *Subject to local regulations
Interface	WLAN: PCIe
Form Factor	Mini PCIe
Antenna	2 x IPEX MHF1 connectors
Modulation	Wi-Fi : 802.11ax: OFDMA (BPSK, QPSK, DBPSK, DQPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM, 4096-QAM)
Power Consumption	TX mode: 1288mA(Max.) RX mode: 965mA(Max.)
Operating Voltage	DC 3.3V
Operating Temperature Range	-20°C ~ +70°C
Storage Temperature Range	-20°C ~ +90°C
Humidity (Non-Condensing)	5%~90% (Operating) 5%~90% (Storing)
Dimension L x W x H (in mm)	50.80mm(±0.15mm) x 29.85mm(±0.15mm) x 9.30mm(±0.3mm)
Weight (g)	14.82g
Driver Support	Linux (Open Source)
Security	64/128-bits WEP, WPA, WPA2,WPA3,802.1x


OUTPUT POWER & SENSITIVITY

802.11ax / 6GHz (Pre-Chain)				
HE20	Data Rate	Tx ± 2dBm (1TX)	Tx ± 2dBm (2TX)	Rx Sensitivity
	HE11	13dBm	16dBm	≤ -60dBm
HE40	HE11	13dBm	16dBm	≤ -56dBm
HE80	HE11	13dBm	16dBm	≤ -53dBm
HE160	HE11	13dBm	16dBm	≤ -51 dBm


Block Diagram

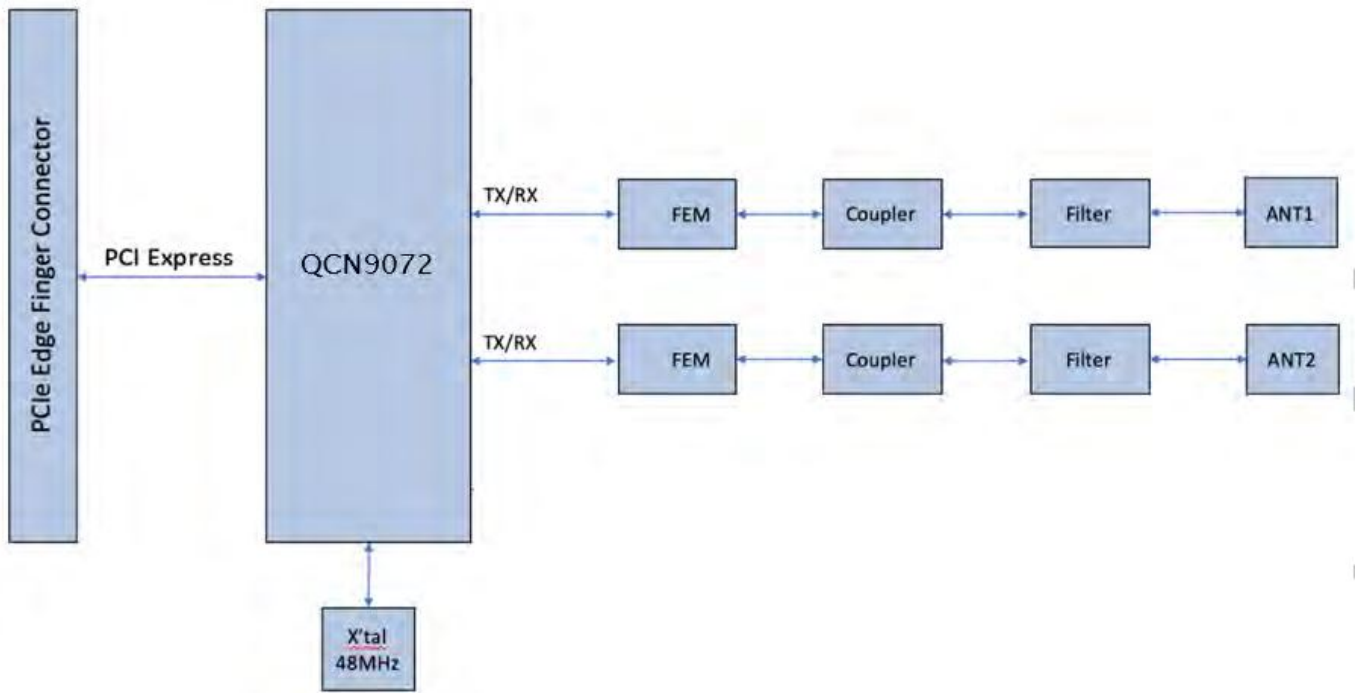

Mechanical Dimension (mm)

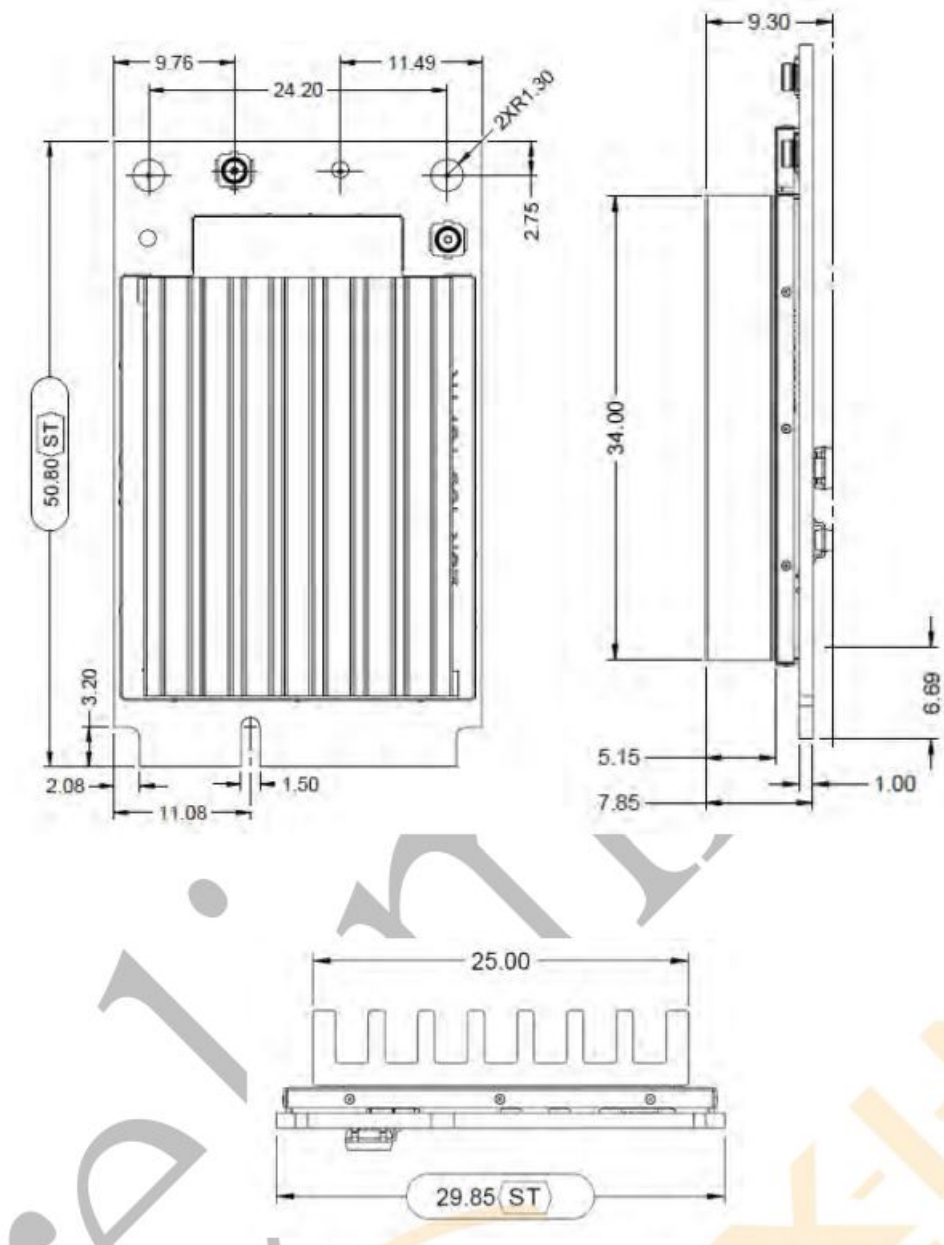

MHF1 connector spec.

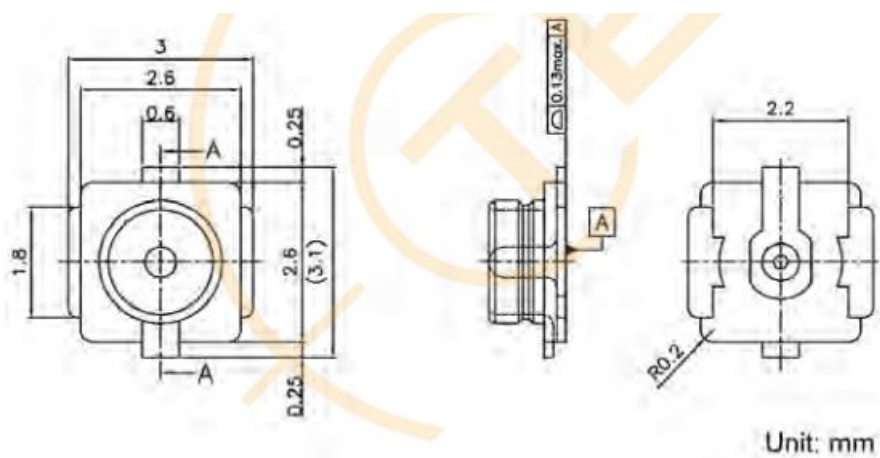

Pin Assignment

The following section illustrate signal pin-outs for the module connector.

TOP			
Pin#	Pin Name	Type	Description
1	WAKE#	I/O	Open Drain active Low signal. When the add-in card supports wakeup, this signal is used by the add-in card to request that the system return from a sleep/suspended state to service a function initiated wake event. When the add-in card supports the OBFF mechanism, this signal is used by the system to indicate OBFF or CPU Active State transitions.
3	COEX1	NC	No Connection
5	COEX2	NC	No Connection
7	CLKREQ#	I/O	PCIe clock request
9	GND	G	Ground connections
11	REFCLK-	I	PCIe differential clock input- Negative
13	REFCLK+	I	PCIe differential clock input- Positive
15	GND	G	Ground connections
17	UIM_IC_DM	NC	No Connection
19	UIM_IC_DP	NC	No Connection
21	GND	G	Ground connections
23	PETn0	O	PCIe Transmit data-Negative
25	PETp0	O	PCIe Transmit data-Positive
27	GND	G	Ground connections
29	GND	G	Ground connections
31	PERn0	I	PCIe receive data-Negative
33	PERp0	I	PCIe receive data-Positive
35	GND	G	Ground connections
37	GND	G	Ground connections
39	+3.3Vaux	P	VDD system power supply input
41	+3.3Vaux	P	VDD system power supply input
43	GND	G	Ground connections
45	ANTCTRL2	O	WLAN PCIe L1 transmit output differential signals(optional)
47	ANTCTRL3	O	WLAN PCIe L1 transmit output differential signals(optional)
49	Reserved	I	WLAN PCIe L1 receive input differential signals(optional)
51	W_DISABLE2#	I	WLAN PCIe L1 receive input differential signals

BOTTOM			
Pin#	Pin Name	Type	Description
2	3.3Vaux	P	VDD system power supply input
4	GND	G	Ground connections
6	1.5V/COEX3	NC	No Connection
8	UIM_PWR	NC	No Connection
10	UIM_DATA	NC	No Connection
12	UIM_CLK	NC	No Connection
14	UIM_RESET	NC	No Connection
16	UIM_SPU	NC	No Connection
18	GND	G	Ground connections
20	W_DISABLE1#	NC	No Connection
22	PERST#	I	PCIe host indication to reset the device. Active low.
24	+3.3Vaux	P	VDD system power supply input
26	GND	G	Ground connections
28	+1.5V/ ANTCTRL0	NC	No Connection
30	SMB_CLK	NC	No Connection
32	SMB_DATA	NC	No Connection
34	GND	G	Ground connections
36	USB_D-	NC	No Connection
38	USB_D+	NC	No Connection
40	GND	G	Ground connections
42	LED_WWAN#	O	LED interface 1
44	LED_WLAN#	O	LED interface 0 for RFA debug
46	LED_WPAN#	NC	No Connection
48	+1.5V/ ANTCTRL1	NC	No Connection
50	GND	G	Ground connections
52	+3.3Vaux	P	VDD system power supply input

Certification

FCC
 IC
 NCC
 CE (RED EN 300 328 V2.2.2 / EN 301 893 V2.1.1)
 MIC
 ASNZS

Ordering Information

Product Name	Part Number	Description
WPEQ-276AX	R9701A90006	11ax 2T2R WiFi 6E Mini PCIe Module

Optional Accessory

Product Name	Part Number	Description
AD-501AX	R3410A10050	Dipole Antenna, 3.7dBi/5dBi/5dBi 2.4G/5G/6GHz, RP-SMA(M) connector
CBIRF-ME150	R3470300023	RF Cable, I-PEXMHF1 to RP-SMA(F); L150mm; Coaxial 1.37 Black
CBIRF-ME250	R3470300024	RF Cable, I-PEX/MHF1 to RP-SMA Female; L:250mm; Coaxial 1.37 Black

Headquarters & Warehouse

Elektrostraat 17
 NL-7483 PG Haaksbergen
 The Netherlands
 T: +31 (0)53 573 33 33
 E: info@texim-europe.com
 Homepage: www.texim-europe.com

The Netherlands

Elektrostraat 17 NL-7483 PG Haaksbergen
 T: +31 (0)53 573 33 33
 E: nl@texim-europe.com

Belgium

Zuiderlaan 14, box 10 B-1731 Zellik
 T: +32 (0)2 462 01 00
 E: belgium@texim-europe.com

UK & Ireland

St Mary's House, Church Lane Carlton Le Moorland Lincoln LN5 9HS
 T: +44 (0)1522 789 555
 E: uk@texim-europe.com

Germany – North

Bahnhofstrasse 92 D-25451 Quickborn
 T: +49 (0)4106 627 07-0
 E: germany@texim-europe.com

Germany – South

Martin-Kollar-Strasse 9
 D-81829 München
 T: +49 (0)89 436 086-0
 E: muenchen@texim-europe.com

Austria

Warwitzstrasse 9
 A-5020 Salzburg
 T: +43 (0)662 216 026
 E: austria@texim-europe.com

Nordic

Søndre Jagtvej 12 DK-2970 Hørsholm
 T: +45 88 20 26 30
 E: nordic@texim-europe.com

Italy

Via Matteotti 43 IT-20864 Agrate Brianza (MB)
T: +39 (0)39 9713293
E: italy@texim-europe.com

www.texim-europe.com

Documents / Resources

	SparkLAN WPEQ-276AX 6GHz Single Band Mini PCIe Module [pdf] User Guide WPEQ-276AX 6GHz Single Band Mini PCIe Module, WPEQ-276AX, 6GHz Single Band Mini P Cle Module, Band Mini PCIe Module, Mini PCIe Module, PCIe Module
---	--

References

- [IoT Wireless Module Solutions | IoT and M2M Experts in Wireless Embedded Wifi](#)
- [IoT Wireless Module Solutions | IoT and M2M Experts in Wireless Embedded Wifi](#)
- [Texim Europe - Expert Technology & Component advice](#)

[Manuals+.](#)