



SparkLAN WPEQ-276AX Wireless Embedded WiFi Module Instruction Manual

[Home](#) » [SparkLAN](#) » SparkLAN WPEQ-276AX Wireless Embedded WiFi Module Instruction Manual 

SparkLAN WPEQ-276AX Wireless Embedded WiFi Module



Contents


- [1 Specification](#)
- [2 Block diagram:](#)
- [3 Installation](#)
- [4 RF exposure statements](#)
- [5 Industry Canada statement:](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)

Specification

Standards	IEEE 802.11ax 2T2R 6G
Chipset	Qualcomm Atheros QCN9072
Data Rate	802.11ax: HE0~11
Operating Frequency	IEEE 802.11ax 5.925~7.125GHz *Subject to local regulations
Interface	WLAN: PCIe
Form Factor	Mini PCIe
Antenna	2 x IPEX MHF1 connectors
Modulation	Wi-Fi : 802.11ax: OFDMA (BPSK, QPSK, DBPSK, DQPSK, 16-QAM, 64-QAM , 256-QAM, 1024-QAM, 4096-QAM)
Power Consumption	TX mode: 1288mA(Max.) RX mode: 965mA(Max.)
Operating Voltage	DC 3.3V
Operating Temperature Range	-20°C ~ +70°C
Storage Temperature Range	-20°C ~ +90°C
Humidity (Non-Condensing)	5%~90% (Operating) 5%~90% (Storing)
Dimension L x W x H (in mm)	50.80mm(±0.15mm) x 29.85mm(±0.15mm) x 9.30mm(±0.3mm)
Weight (g)	14.82g
Driver Support	Linux
Security	64/128-bits WEP, WPA, WPA2,WPA3,802.1x

Block diagram:

Block Diagram

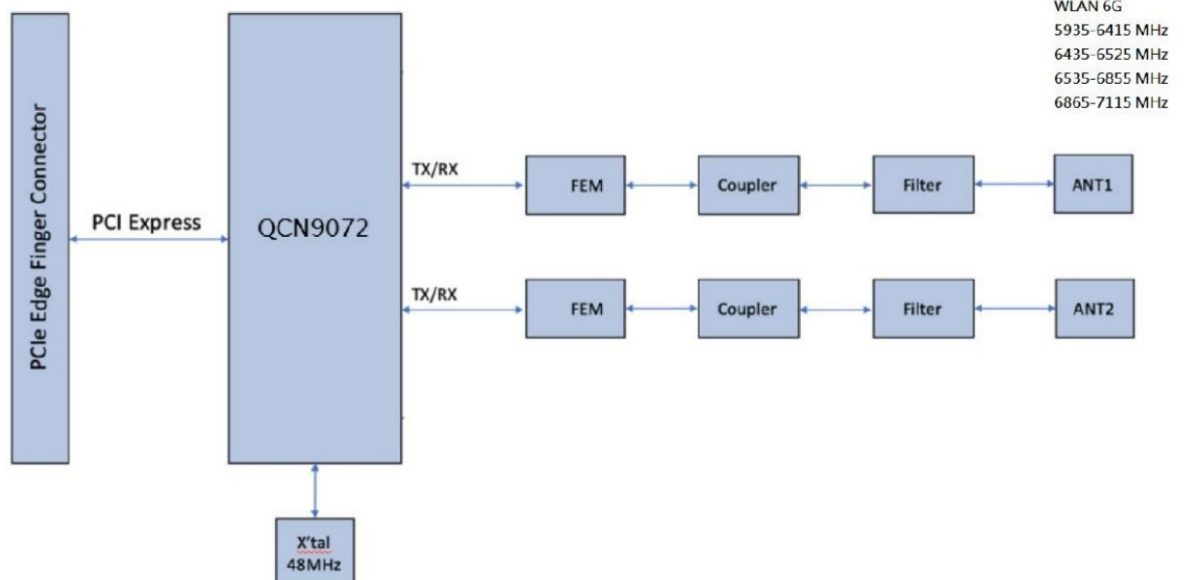

Installation

- Connect the Module to the PCIe slot of the computer.
- Install Wi-Fi driver driver.
- After the Wi-Fi Driver is installed , click the Network icon on the Windows, then search the network and connect the Wireless Network you want.

Federal Communication Commission Interference Statement:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

RF exposure statements

This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body or nearby persons.

CFR 47 SUBPART E (15.407) has been investigated. It is applicable to the modular transmitter.

The devices must be installed and used in strict accordance with the manufacturer's instructions as described in

the user documentation that comes with the product.

This radio transmitter RYK-WPEQ276AX has been approved by Federal Communications Commission to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Unique antenna connector must be used on the Part 15 authorized transmitters used in the host product.

Antenna Type	Brand	Antenna Model	Maximum Gain (dBi)	Remark
			6 GHz	
Dipole	SparkLAN	AD-506AX	4.98 dBi	
Dipole	SparkLAN	AD-501AX	5 dBi	Length of Antenna cable:150mmConnector type of Antenna cable: I-PEX/MHF4 to RP- SMA(F)
Dipole	SparkLAN	AD-509AX	5 dBi	
Dipole	SparkLAN	AD-507AX	4.94 dBi	
Dipole	SparkLAN	AD-508AX	4.94 dBi	

If the FCC identification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following: “Contains Transmitter Module FCC ID: RYK-WPEQ276AX” Or “Contains FCC ID: RYK-WPEQ276AX”

The modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. The final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

The module is for indoor applications only.

The module may not be used for the purposes of remote control of drones

The antenna must be installed into the host device so that the end user does not have access to the antenna or its connector.

Minimum antenna gain, including any cable losses, for the 6GHz bands must exceed 0dBi.

Label Indoor Only Info & restrictions.

FCC regulations restrict the operation of this device to indoor use only. Operation prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet.

OEM Integrator must refer to FCC KDB “996369 D04 Module Integration Guide v02” for modular transmitter integration guidance.

Industry Canada statement:

This device complies with Industry Canada license-exempt RSSs. Operation is subject to the following two conditions:

1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This radio transmitter (IC: 6158A-WPEQ276AX has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Antenna Type	Brand	Antenna Model	Maximum Gain (dBi)	Remark
			6 GHz	
Dipole	SparkLAN	AD-506AX	4.98 dBi	
Dipole	SparkLAN	AD-501AX	5 dBi	Length of Antenna cable:150mmConnector type of Antenna cable: I-PEX/MHF4 to RP- SMA(F)
Dipole	SparkLAN	AD-509AX	5 dBi	
Dipole	SparkLAN	AD-507AX	4.94 dBi	
Dipole	SparkLAN	AD-508AX	4.94 dBi	

If the ISED certification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following: “Contains IC: 6158A-WPEQ276AX”.

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.

The end user manual shall include FCC Part 15 /ISED RSS GEN compliance statements related to the transmitter as show in this manual.

Host manufacturer is strongly recommended to confirm compliance with FCC/ISED requirements for the transmitter when the module is installed in the host.

The use condition limitations extend to professional users, then instructions must state that this information also extends to the host manufacturer's instruction manual.

Operation shall be limited to indoor use only.

Operation on oil platforms, cars, trains, boats and aircraft shall be prohibited except for on large aircraft flying above 10,000 ft.

<div> <div>WPEQ-276AX</div> <div>Manual</div> </div>		<div> <div>SparkLAN WPEQ-276AX Wireless Embedded WiFi Module</div> <div>[pdf] Instruction Manual</div> <div>RYK-WPEQ276AX, RYKWPEQ276AX, wpeq276ax, WPEQ-276AX Wireless Embedded WiFi Module, Wireless Embedded WiFi Module, Embedded WiFi Module, WiFi Module</div> </div>
Specification	<div> <div>Model</div> <div>WPEQ-276AX</div> </div>	
Manufacturer	<div> <div>Manufacturer</div> <div>SparkLAN</div> </div>	
Part Number	<div> <div>Part Number</div> <div>WPEQ-276AX</div> </div>	
Product Name	<div> <div>Product Name</div> <div>WPEQ-276AX</div> </div>	
Product Description	<div> <div>Product Description</div> <div>WPEQ-276AX</div> </div>	
Product Category	<div> <div>Product Category</div> <div>WPEQ-276AX</div> </div>	
Product Type	<div> <div>Product Type</div> <div>WPEQ-276AX</div> </div>	
Product Status	<div> <div>Product Status</div> <div>WPEQ-276AX</div> </div>	
Product Version	<div> <div>Product Version</div> <div>WPEQ-276AX</div> </div>	