

speco technologies MGS1 Dynamic Gooseneck Microphone Instructions

Home » speco technologies » speco technologies MGS1 Dynamic Gooseneck Microphone Instructions






Contents

- 1 MGS1 Dynamic Gooseneck Microphone
- 2 STANDARD WIRING DIAGRAM:
- **3 SPECIFICATIONS:**
- 4 Documents / Resources
 - 4.1 References

MGS1 Dynamic Gooseneck Microphone

Thank you for your choice of Speco Technologies' MGS1 Microphone. This unit is designed and manufactured to provide an economical solution to broadcast voice throughout an installation. The sturdy construction ensures a long and versatile life

STANDARD WIRING DIAGRAM:

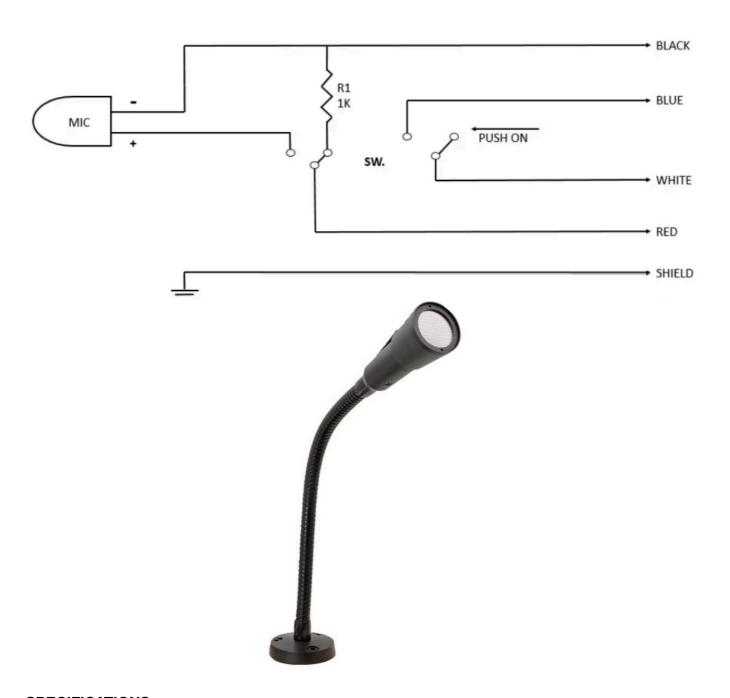

SPECIFICATIONS:

• Type: Dynamic Microphone

• Directivity: Omni-Directional

• Impedance: 500 Ohms@1kHz, tolerance ±30%

• Sensitivity: $-71dB\pm3dB$ @ 1kHz re 0dB = 1 V/ μ bar


• Frequency Response: 300 to 10,000Hz

Speco Technologies is constantly developing and improving products.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Speco Technologies . 200 New Highway . Amityville . NY . 11701 . www.specotech.com Rev. 04/23/20

Documents / Resources



speco technologies MGS1 Dynamic Gooseneck Microphone [pdf] Instructions
MGS1, MGS1 Dynamic Gooseneck Microphone, Dynamic Gooseneck Microphone, Gooseneck Microphone

References

• User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.