



Speco Technologies O2VB1V 2MP Outdoor Network Bullet Camera with Night Vision User Guide

[Home](#) » [speco technologies](#) » Speco Technologies O2VB1V 2MP Outdoor Network Bullet Camera with Night Vision User Guide 



Contents

[1 Warning and Caution](#)

[2 Package](#)

[3 Overview](#)

[4 Installation](#)

[5 Web Operation and Login](#)


[6 Documents / Resources](#)

[7 Related Posts](#)


Warning and Caution

- If the product does not work properly, please contact your dealer or the nearest service center. Never attempt to disassemble the camera yourself. Any unauthorized changes or modifications could void the warranty.
- Do not allow water or liquid intrusion into the camera.
- All installation and operation here should conform to local electrical safety codes. Make sure the device is firmly installed on the wall or ceiling.
- Do not use a camera beyond the specified voltage range.
- Do not drop the camera or subject it to physical shock.
- Avoid touching the camera lens.
- If cleaning is necessary, please use a cleaning cloth to wipe it gently.
- Do not aim the camera at the sun or extremely bright light sources.
- Do not place the camera in extremely hot or cold environments and dusty and damp locations. Do not expose it to high electromagnetic radiation.
- Do not block any ventilation.


Package

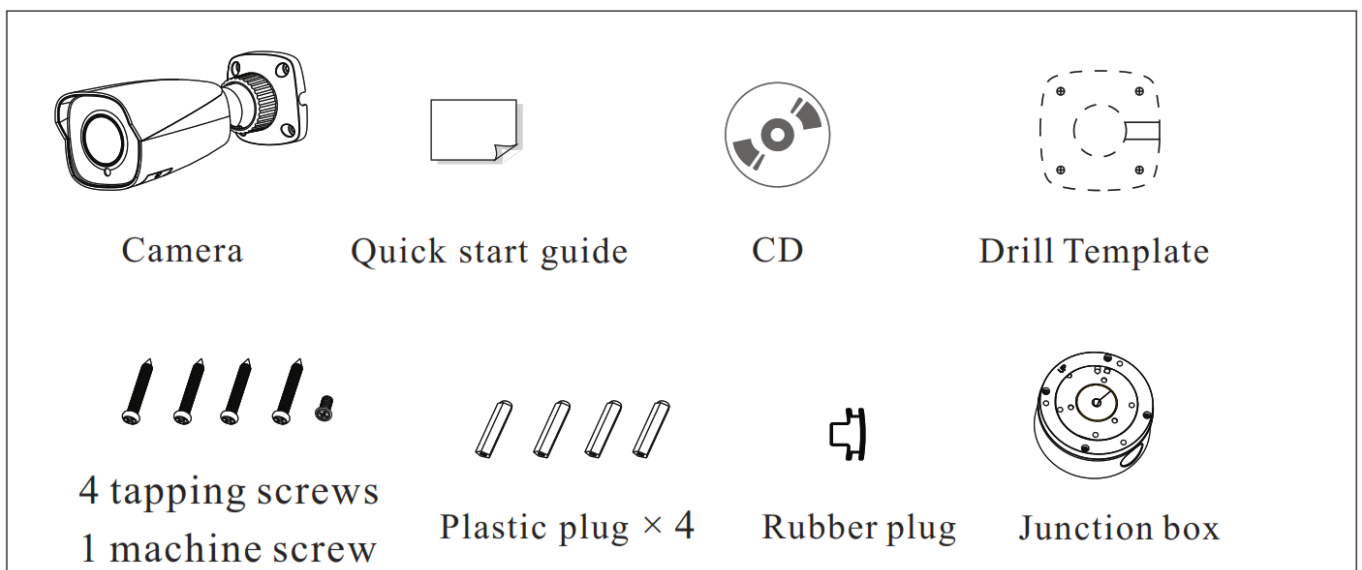

Overview

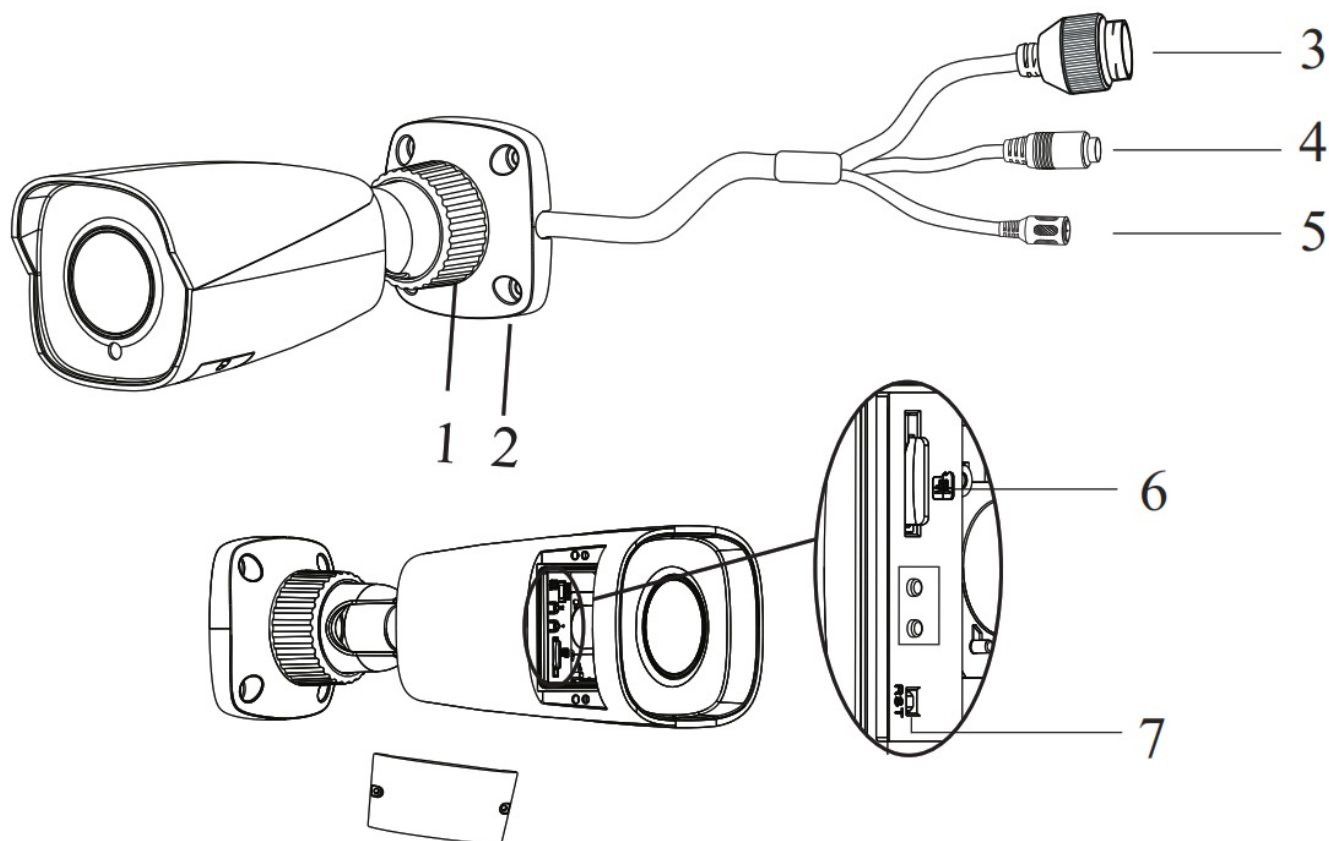


1	Fixed ring	6	Micro SD card slot
2	Ethernet connector	5	DC power connector
3	Audio input	7	Reset
4	Mounting base		

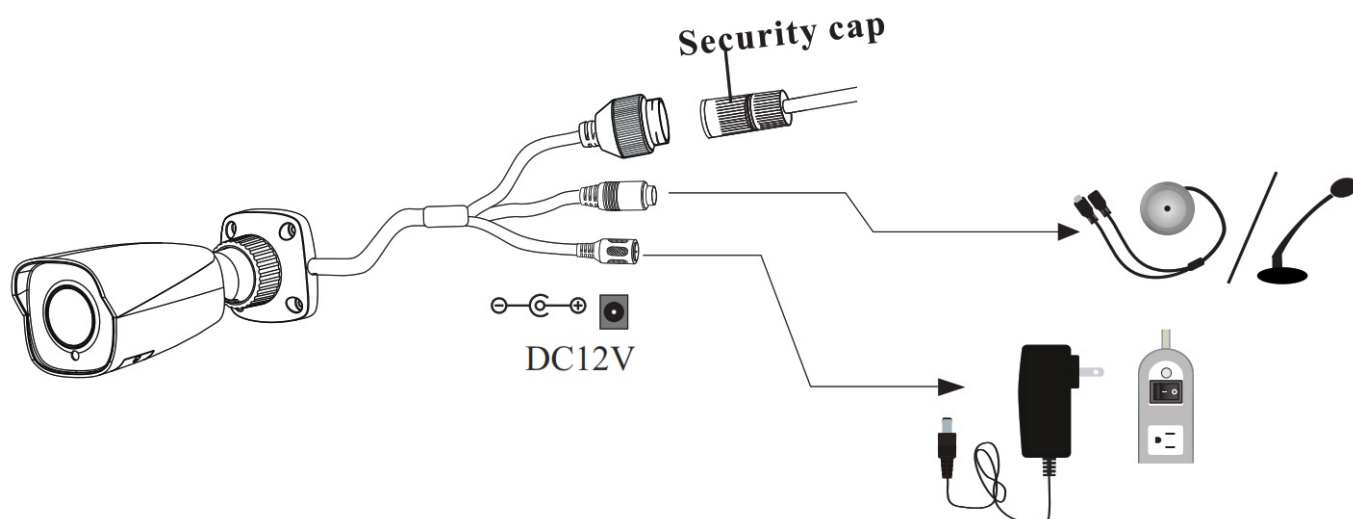

* 1 It is recommended to install the security cap for outdoor installations.

* 2 DC 12V power supply is not required if a PoE switch or injector is used to power the camera.

Connecting Network Cable

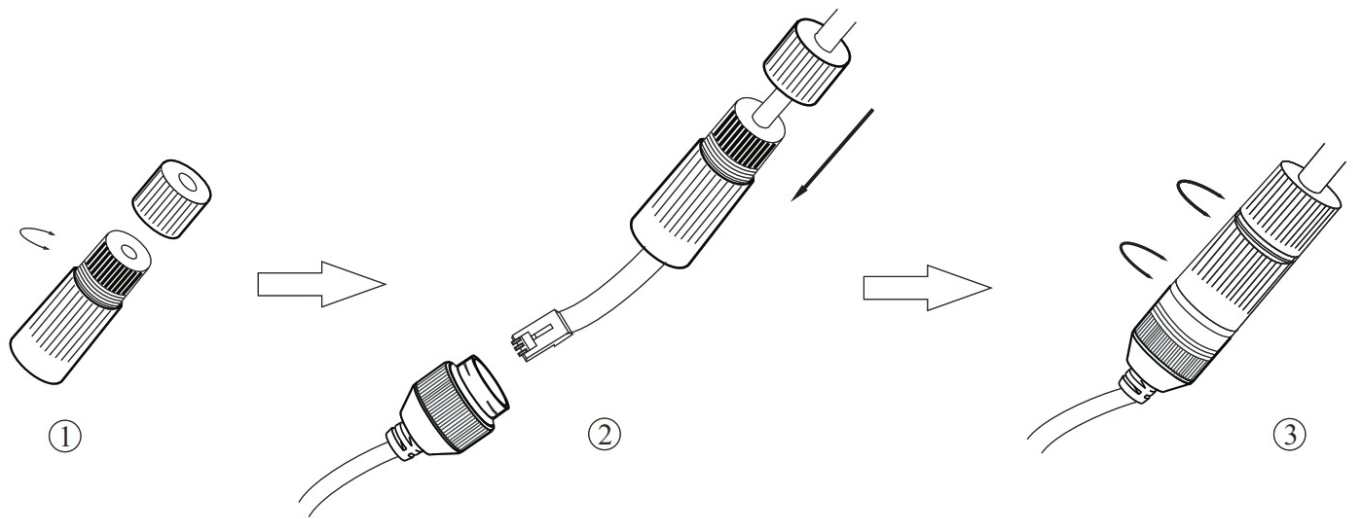

① Loosen the nut from the main element.


② Run the network cable (without RJ 45 connector) through both elements. Then crimp the cable with RJ 45 connector.

③ Connect the cable to the hermetic connector. Then tighten the nut and the main cover.


Installation

* Before you start, please make sure that the wall or ceiling is strong enough to withstand three times the weight of the camera.


1. Open the mounting base and the upper cover of the junction box.

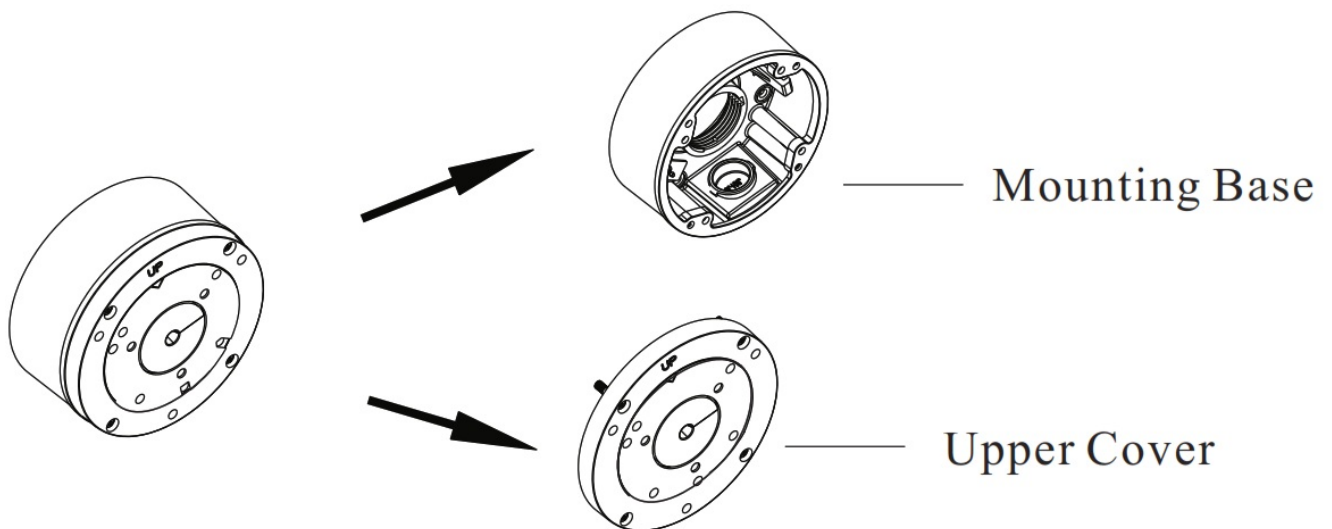


2. Install the junction box onto the wall by using the screws provided.

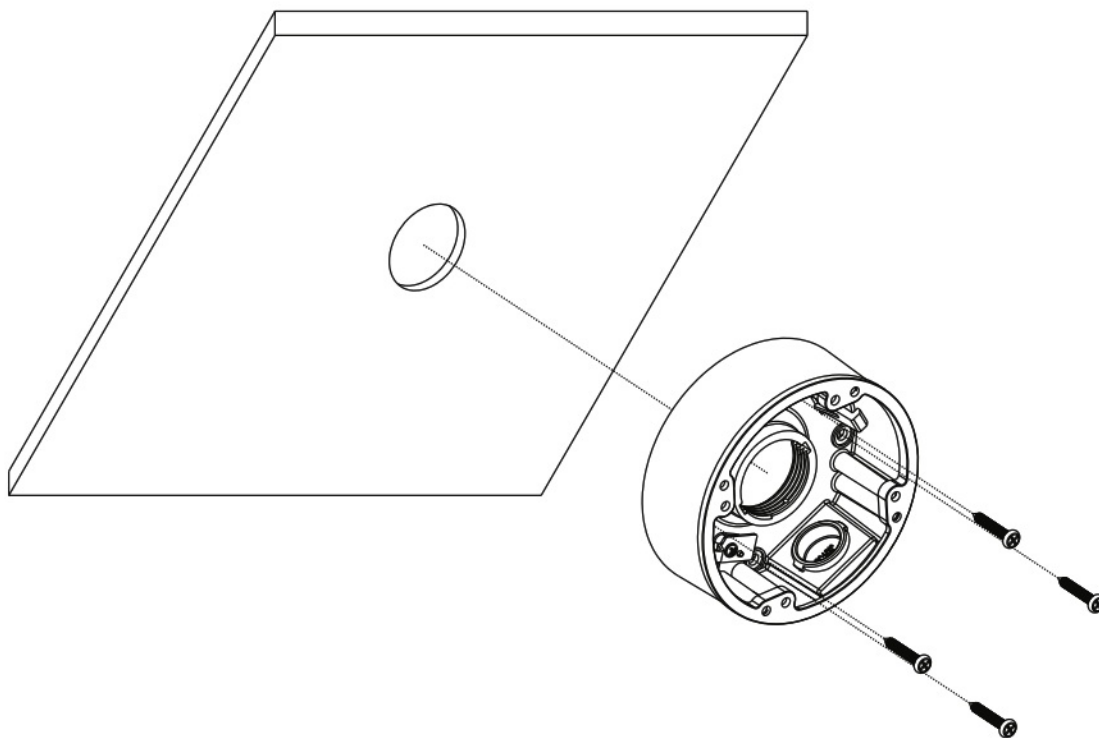


3. Mount the rubber plug to the gap of the mounting base and fasten the camera onto the mounting base.

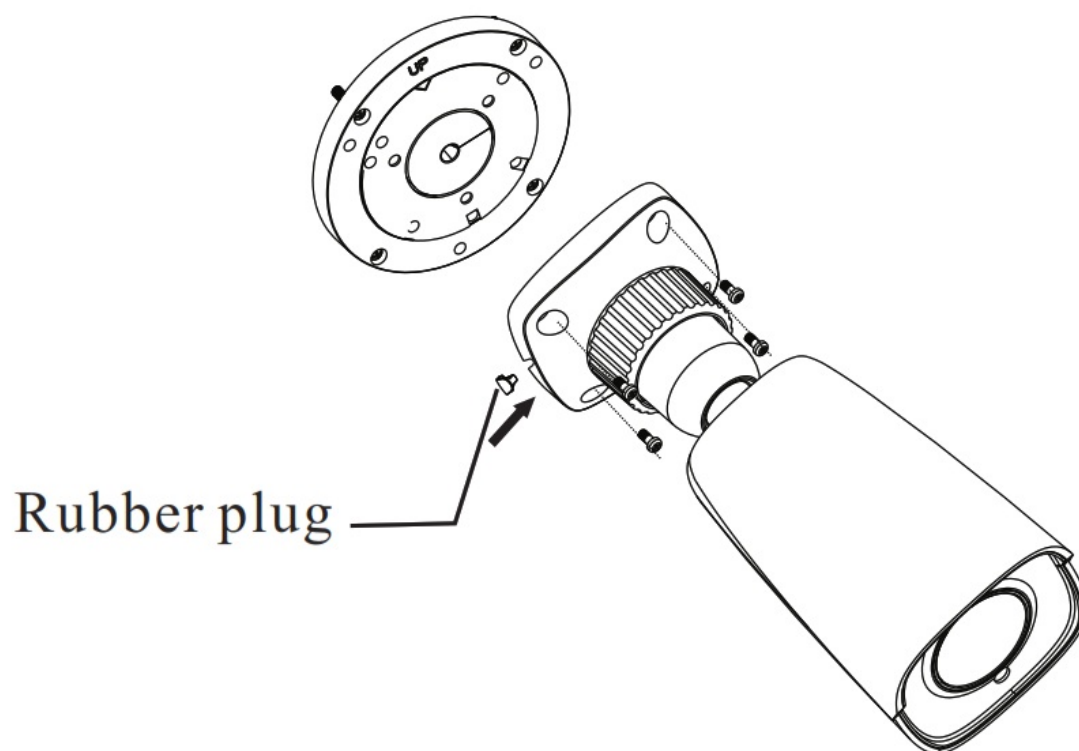

4. Connect the cables and then install the camera onto the junction box as shown below.

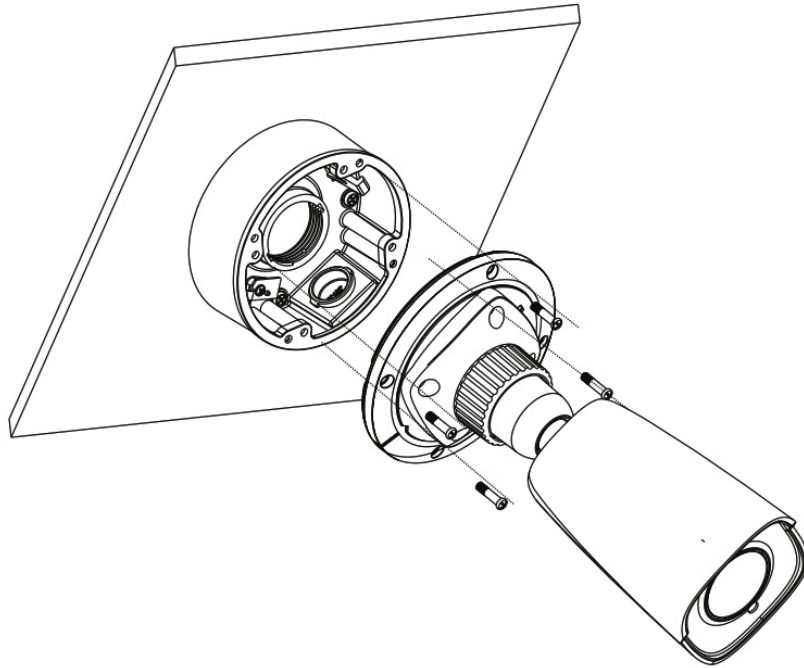

5. Bracket Adjustment-Loosen the fixed ring to adjust the view angle of the camera. After you get the optimum angle of view, tighten the fixed ring to complete the installation.

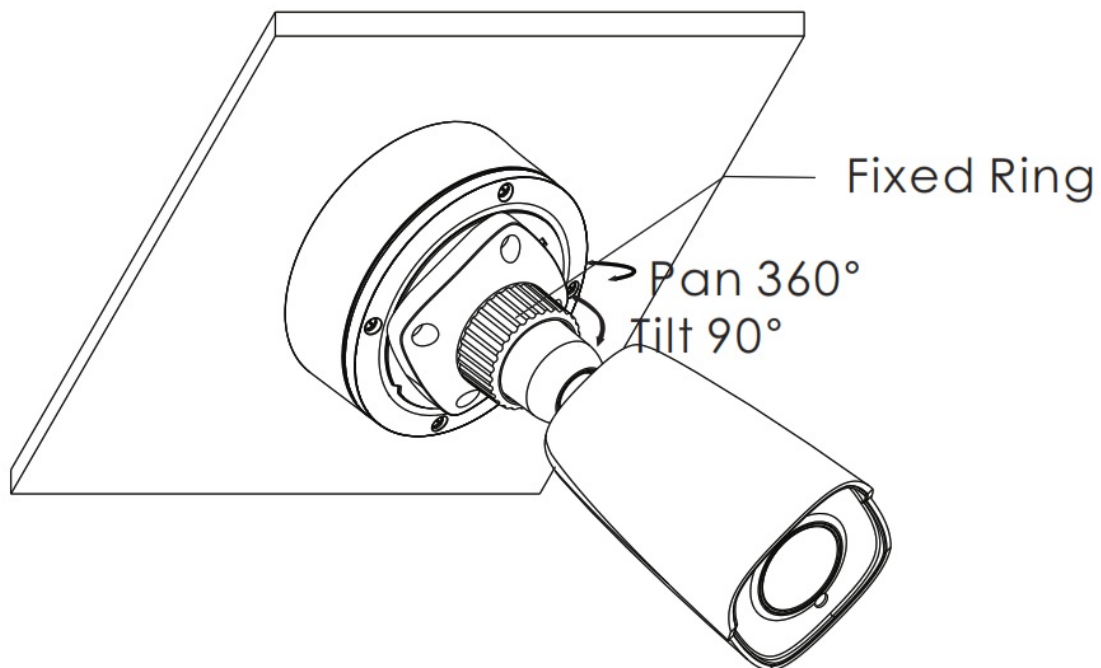

Web Operation and Login


IP Scanner can search for the device on the local network.

● Operation

1. Make sure that the camera and the PC are connected to the same local network. The camera is set to DHCP by default.
2. Install IP Scanner from the CD and run it after installation.

SecureGuard IP Scanner						
Refresh	Open Web Page	Login...	IP	Restart	Factory Default	Information About
Status	Model Name	Name	IP Address	MAC Address	Wireless IP Address	Zero Config IP
Online		O2VB1V	192.168.17.251	00:18:CE:24:68:9A	n/a	n/a

3. In the device list, you can view the IP address, model number, and MAC address of each device. Select the applicable device and double-click to open up the web viewer. You can also manually enter the IP address in the address bar of the web browser.



Username

Password



Login

Cancel

The login interface is shown above. The default user name is admin and the password is 1234. After logging in, follow the directions to install applicable plugins.



Documents / Resources

 	Speco Technologies O2VB1V 2MP Outdoor Network Bullet Camera with Night Vision [pdf] User Guide O2VB1V 2MP Outdoor Network Bullet Camera with Night Vision, O2VB1V, 2MP Outdoor Network Bullet Camera with Night Vision, O2VB1V Network Bullet Camera with Night Vision, O2VB1V Camera with Night Vision
---	---