

SQUATZ SQSISSY-2 Multi Function Sissy Squat Machine User Guide

Home » SQUATZ » SQUATZ SQSISSY-2 Multi Function Sissy Squat Machine User Guide 🖺



SQSISSY-2 CENTRUM II

Multifunction Sissy Squat Machine

Adjustable Squat Bench for Home Gym Workout Station
and Leg Exercise (Black & Orange)

User Guide



Before use, please read this manual carefully to ensure correct operation. KEEP THIS MANUAL FOR FUTURE REFERENCE.

Contents

- 1 Features
- 2 What's in the Box
- **3 PARTS IDENTIFICATION**
- 4 ASSEMBLY
- **INSTRUCTIONS**
- **5 Documents / Resources**
 - **5.1 References**

Features

- · Easy to Use and Easy to Store
- Foldable Cushions and Foldable Bench
- Space Saver Workout Station Machine
- · Design to Train Abs, Thighs, and Glutes
- · Help to Build Muscle, Strength, Balance, Durability, and Flexibility
- Made of Premium and Quality Material
- Made of Heavy-Duty Steel Main Frame
- · Adjustable Foam Foot Holder
- Comfortable and Adjustable Rear Cushion for Feet and Legs
- Large Steel Non-Slip Footplate
- Adjustable Design Workout Station that Fits Different Body Shapes

What's in the Box

Maine Frame	Foam Adjustment Rod
• Front Foot	• (3) Elastic Latch
Hind Foot	• (4) Screw (10×70)
Cushion	• (4) Nut
• Pedal	• (8) Gasket
• Fist Plate	• (12) Screw (8×20)
• (2) Foam	• (12) Gasket
Seat Adjustment Rod	• Bolt
Fist Plate Adjustment Rod	

Technical Specs:

• Construction Material: Steel Tube

• Weight Capacity: 440.9 Lbs.

• Item Weight: 27.5 Lbs.


• Product Dimensions (L x W x H): 42.5" x 28" x 22" -inches








PARTS IDENTIFICATION

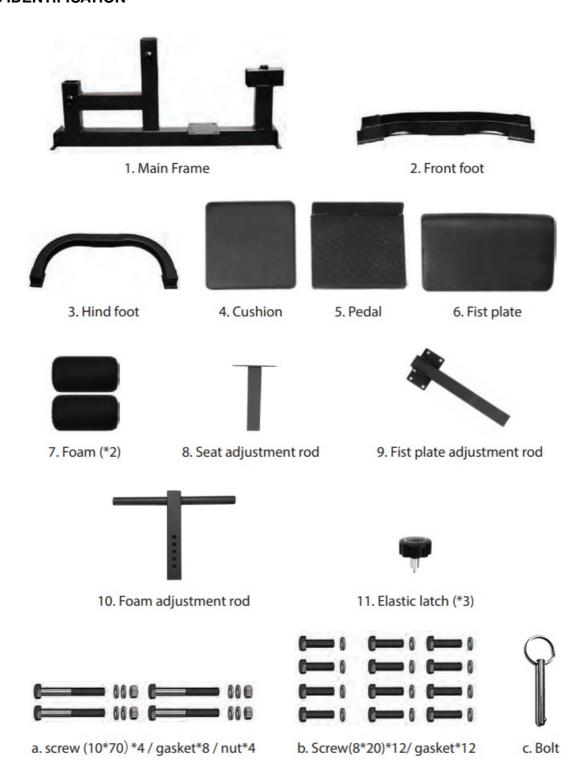


1. Install the pedal 5 on main frame 1 assemble and fix with screw and gasket.

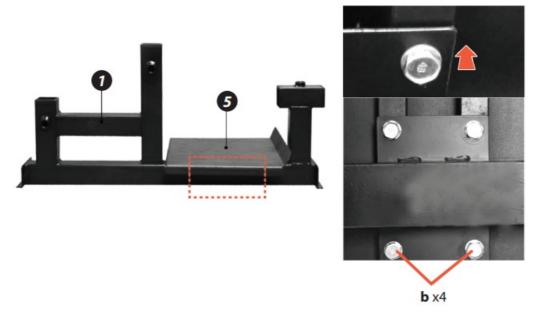

2. Install front foot 2 and hind foot 3 on main frame 1 respectively, assemble and fix with screw, gasket and nut. **Attention**: The curved front and hind foot face the outside of the main frame.




3. A: Assemble the seat adjustment rod 8 and cushion 4 using screw and gasket.B: Insert the assembled seat adjustment rod into the main frame 1 turn the elastic latch clockwise into the seat adjustment rod to fix.

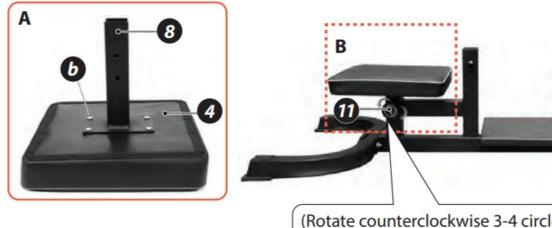

(Rotate counterclockwise 3-4 circles, pull the latch outward, the seat adjustment rod can be adjusted up and down, turn the latch clockwise to lock and fix.)

4. A: Assemble the fist plate adjustment rod 9 and fist plate 6 using screw and gasket.

B: Inset the assembled fist plate adjustment rod into the main frame 1 turn the elastic latch clockwise into the fist plate adjustment rod to fix.

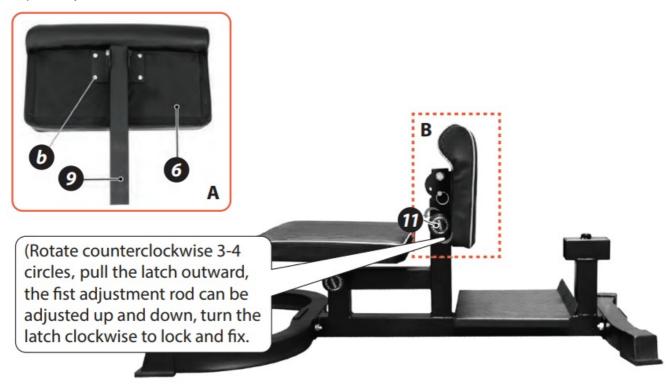

5. A: Put the foam 7 into the foam rod 10.

B: Insert the assembled foam adjustment rod into the main frame 1 turn the elastic latch clockwise into the foam adjustment rod.



(Rotate counterclockwise 3-4 circles, pull the latch outward, the foam adjustment rod can be adjusted up and down, turn the latch clockwise to lock and fix.

6. Insert the bolt into the fist plate adjustment rod, different positions can adjust the gradient of the fist plate.









www.SQUATZ.com

Questions? Comments?

We are here to help!

Phone: (1) 718-535-1800

Email: support@pyleusa.com

Documents / Resources



<u>SQUATZ SQSISSY-2 Multi Function Sissy Squat Machine</u> [pdf] User Guide SQSISSY-2 Multi Function Sissy Squat Machine, SQSISSY-2, Multi Function Sissy Squat Machine, Function Sissy Squat Machine, Squat Machine, Machine

References

• Squatz - Squatz Fitness

Manuals+,