



SSK SC216 6 in 1 Multiport USB C Laptop Docking Station Adapter User Manual

[Home](#) » [SSK](#) » SSK SC216 6 in 1 Multiport USB C Laptop Docking Station Adapter User Manual 

Contents

- [1 SSK SC216 6 in 1 Multiport USB C Laptop Docking Station Adapter](#)
- [2 Schematic diagram of the product interface](#)
- [3 Connection diagram](#)
- [4 Product specifications](#)
- [5 Frequently asked questions and precautions](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)




SSK SC216 6 in 1 Multiport USB C Laptop Docking Station Adapter



Description

Thank you for choosing our products
Before using the product, please read this manual carefully


Schematic diagram of the product interface

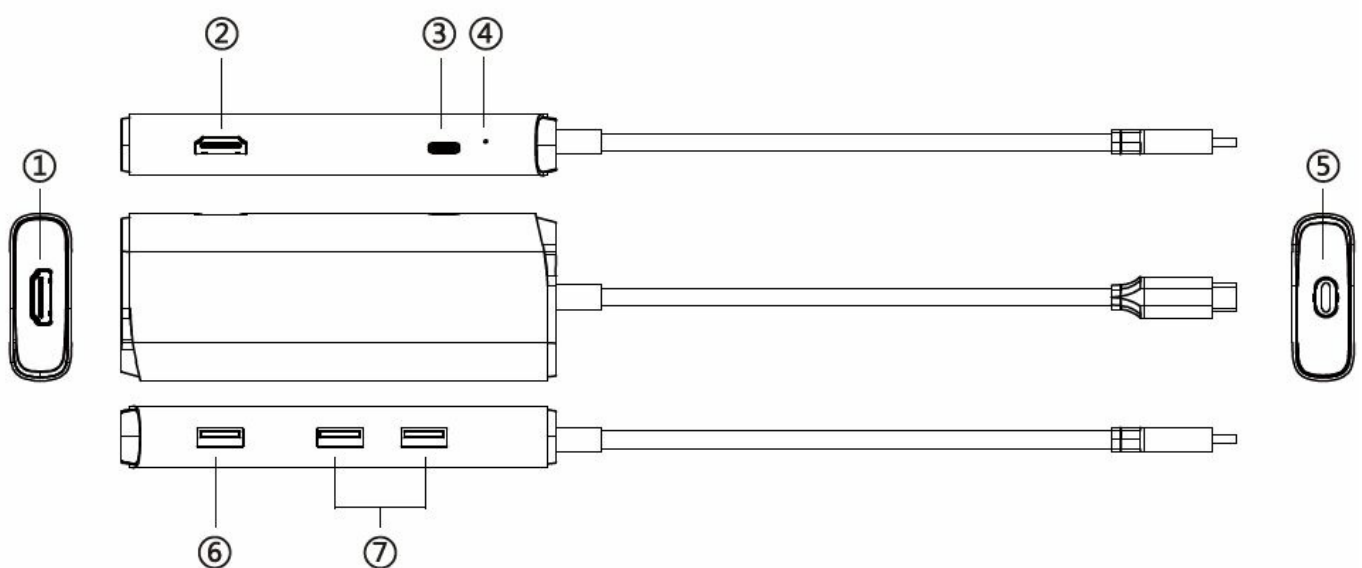

1. HDMI 1 interface
2. HDMI 2 interface
3. PD3.0 port

4. LED status indicator
5. Type-C cable
6. USB2.0 interface
7. 2×USB3.0 interface

Connection diagram

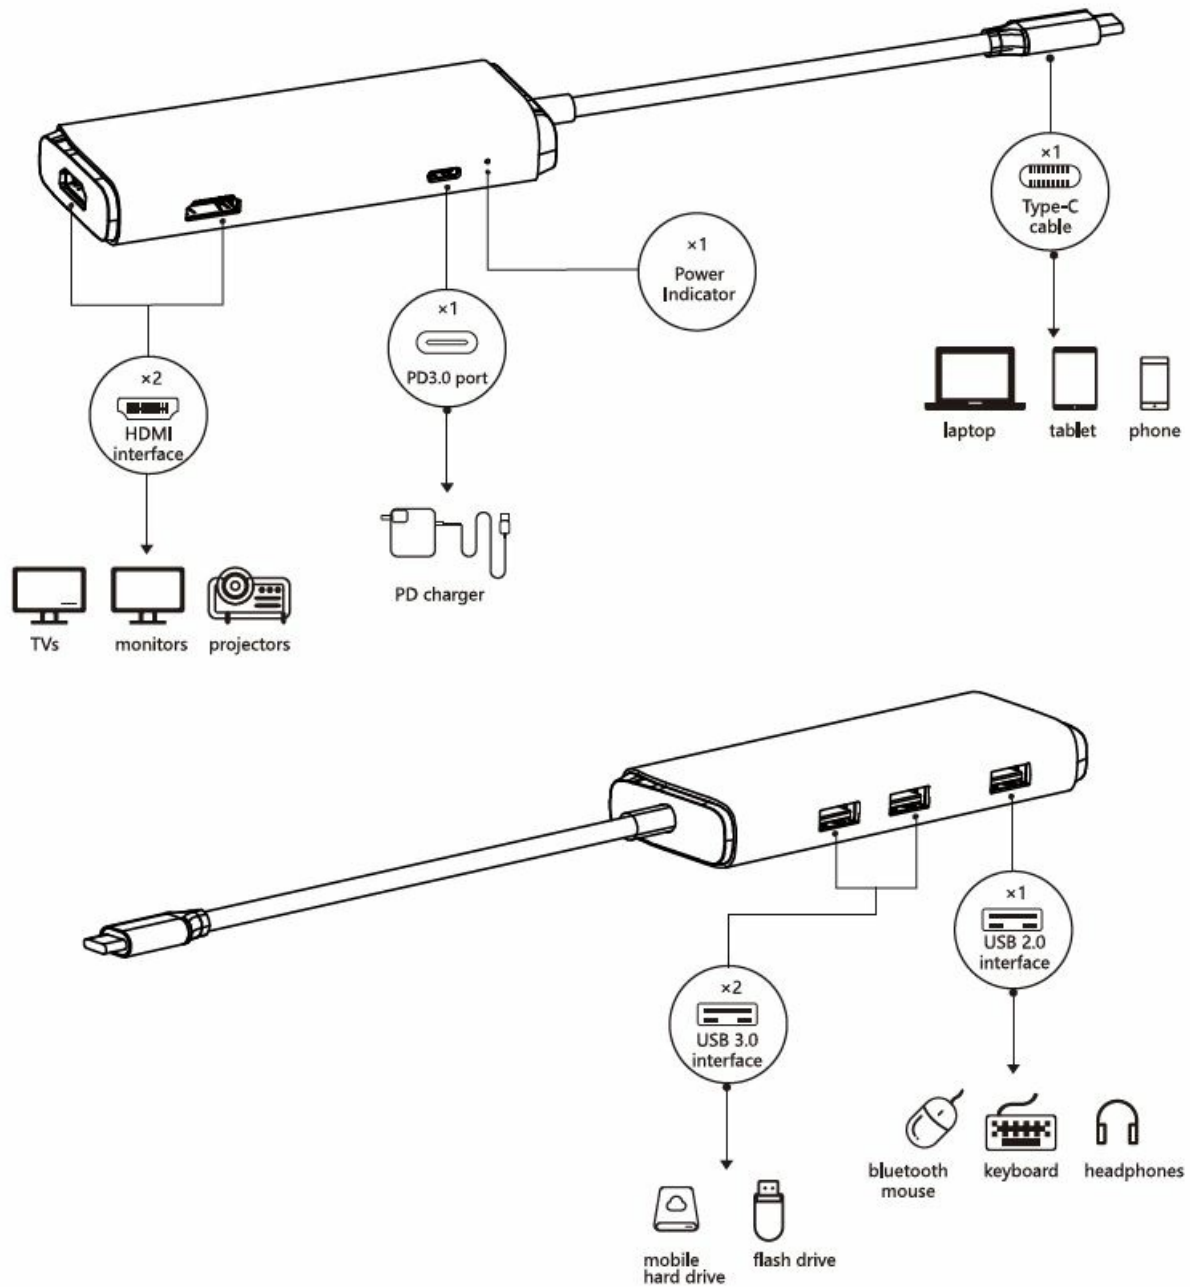

Product specifications

Input	Type-C
Output	2×USB3.0-A, 1×USB2.0-A, 1×Type-C PD, 2×HDMI,
Data interface	2 x USB3.0-A The read and write speed can reach up to 5Gbps (about 450MB per seconds), backward compatible with USB2.0/1.1 1×USB2.0-A Bluetooth device dedicated interface ※This interface also supports USB2.0 data transmission
HDMI interface	HDMI①: Support up to 4K60Hz resolution; HDMI②: Support up to 4K30Hz resolution; Support HDCP; support MST split screen;
Charging port	Type-C interface, support PD3.0 charging protocol
Support system	Windows10/11,MacOs,Android, iPad OS,Linux
Size (L*W*H)	120*46*18mm
Cable length	185mm/0.6ft
Weight	about 101.8g

Frequently asked questions and precautions


1. The Type-C interface near the end of the Type-C cable only supports PD charging, has no data function, and cannot output power externally.
2. Two HDMI ports can be used at the same time. The video output of the product supports MST split-screen mode, and multiple display devices can be connected at the same time to display different images (this function is only for Windows).
3. Due to the limitation of equipment performance and interface, when HDMI 1 and HDMI 2 are connected at the same time, the output can be up to 4K30Hz.
4. Please use the original charger of the computer/tablet device for charging. If you need to use other chargers for charging, please ensure that the charger supports the PD charging protocol and the charging power meets the minimum requirements of the device used.
5. When there are many external large-capacity mobile hard disks and other devices, please connect them one by one to avoid insufficient load caused by too many devices being powered on at the same time.

6. Since the product supports 4K60Hz video output, the chip has a large amount of calculation and will generate more heat. In order to ensure the normal operation of the chip and prolong the service life of electronic devices, a large amount of heat will be exported to the shell, so the shell will heat up obviously during use, which is a normal phenomenon.
7. The LED status indicator lights up when the product is connected to a computer or a charger, and it can be judged whether the docking station is powered on normally.
8. The interface of the electronic device (mobile phone, notebook, tablet, etc.) connected by the user needs to support video output, otherwise the HDMI interface will not function when using this product. For relevant device interface parameters, you can go to the official website of the electronic device or the customer service center for inquiries.

Made in China



Documents / Resources

	SSK SC216 6 in 1 Multiport USB C Laptop Docking Station Adapter [pdf] User Manual B1B78Muz1IL, SC216, SC216 6 in 1 Multiport USB C Laptop Docking Station Adapter, Multipor t USB C Laptop Docking Station Adapter, Laptop Docking Station Adapter, Docking Station Ada pter, Station Adapter
---	---

References

- [User Manual](#)