



230-SWTS-
MAVR Vehicle
Specific Turn
Signal Kit



SSV Works 230-SWTS-MAVR Vehicle Specific Turn Signal Kit Instruction Manual

[Home](#) » [SSV WORKS](#) » SSV Works 230-SWTS-MAVR Vehicle Specific Turn Signal Kit Instruction Manual 

Contents

- [1 SSV Works 230-SWTS-MAVR Vehicle Specific Turn Signal Kit](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 WARRANTY INFORMATION](#)
- [5 FEATURES & BENEFITS](#)
- [6 SWITCH Works Tango2 Parts List](#)
- [7 Wiring Diagram](#)
- [8 TOOLS NEEDED FOR INSTALLATION](#)
- [9 INSTALLATION INSTRUCTION](#)
- [10 Turn Signal 180 Degree Viewing Angle](#)
- [11 TURN SIGNAL ROCKER SWITCH FUNCTIONS](#)
- [12 LED BACK LIGHT COLOR CHANG](#)
- [13 Documents / Resources](#)
 - [13.1 References](#)
- [14 Related Posts](#)



SSV Works 230-SWTS-MAVR Vehicle Specific Turn Signal Kit



Product Information

Specifications:

- Model: 230-SWTS-MAVR
- Compatibility: 2024-Up Can-Am Maverick R XR
- Product Type: Turn Signal Kit with Horn
- Manufacturer: SSV WORKS
- Warranty: 1 year limited warranty

Product Usage Instructions

Features & Benefits:

- Left/Right Turn Signal with Automatic Canceling Feature
- Dedicated Horn Output
- License Plate Light Output
- Emergency Hazard Light Switch
- Direct plug into the factory tail light connectors
- RGB Backlight Buttons
- Weather-Proof for Offroad Use
- Built-In Circuit Protection
- Programmable RGB Backlight Colors to Match the Dash Lights

Installation Steps:

1. Find a suitable mounting location for the TANGO2 brain module and secure it.

2. Insert the TANGO2 turn signal rocker switch into a vacant rocker switch slot.
3. Plug in the controller cable, front turn signal extension cables, and rear turn signal harness to the TANGO2 main harness.
4. Route the front left and right turn signal extension cables to the front of the vehicle and connect them to the LED lamps.
5. Run the Horn power wires to the desired horn location.
6. Route the TANGO2 rear turn signal harness to the rear of the vehicle and secure it with zip ties.
7. Drill a 3/4 hole in the front of the vehicle for the front turn signal LED lamp and insert it.

Frequently Asked Questions (FAQ)

- Q: How do I program the RGB Backlight Colors?

A: To program the RGB Backlight Colors, refer to the user manual for detailed instructions on adjusting the colors to match your dash lights.

- Q: What tools are needed for installation?

A: The tools needed for installation include a Phillips Screwdriver, Drill, and a 3/4 Hole Saw as specified in the manual.

- Q: What is the warranty coverage for this product?

A: The product is covered by a limited 1-year warranty against defects in material or workmanship. Contact SSV Works for further warranty information.

WARRANTY INFORMATION

ALL SWITCH Works Electronics are covered by a limited 1-year warranty against defects in material or workmanship. Contact SSV Works for further warranty information.

Please read and understand these instructions completely before installation to avoid possible injury or damage to the accessory or vehicle.

FEATURES & BENEFITS



- Left/Right Turn Signal with Automatic Canceling Feature
- Dedicated Horn Output
- License Plate Light Output
- Emergency Hazard Light Switch
- Direct plug in to the factory tail light connectors
- RGB Backlight Buttons
- Weather-Proof for Offroad Use
- Built-In Circuit Protection Detects Any Short Circuits, Over Current, Under Current and Low Voltage
- Programmable RGB Backlight Colors to Match the Dash Lights

SWITCH Works Tango2 Parts List



Tango2 Turn Signal Module



Tango2 Turn Signal Rocker Switch



Tango2 Turn Signal Main Harness [B-H3271]



Can-Am X3 Rear Turn Signal Harness [B-H3205]



Tango2 Front Turn Signal LED Lamps (x2) [B-H2813]



Front Turn Signal Extension Harness (x2) [B-S2959]



Horn Assembly, 500hz
[A-SW-HRN]



Zip Ties (x10)




Power Input Harness
[B-H3413]




3-Pin Dummy Plug

Wiring Diagram

SWITCH Works TANGO2 Maverick X3 Turn Signal Kit Wiring Diagram

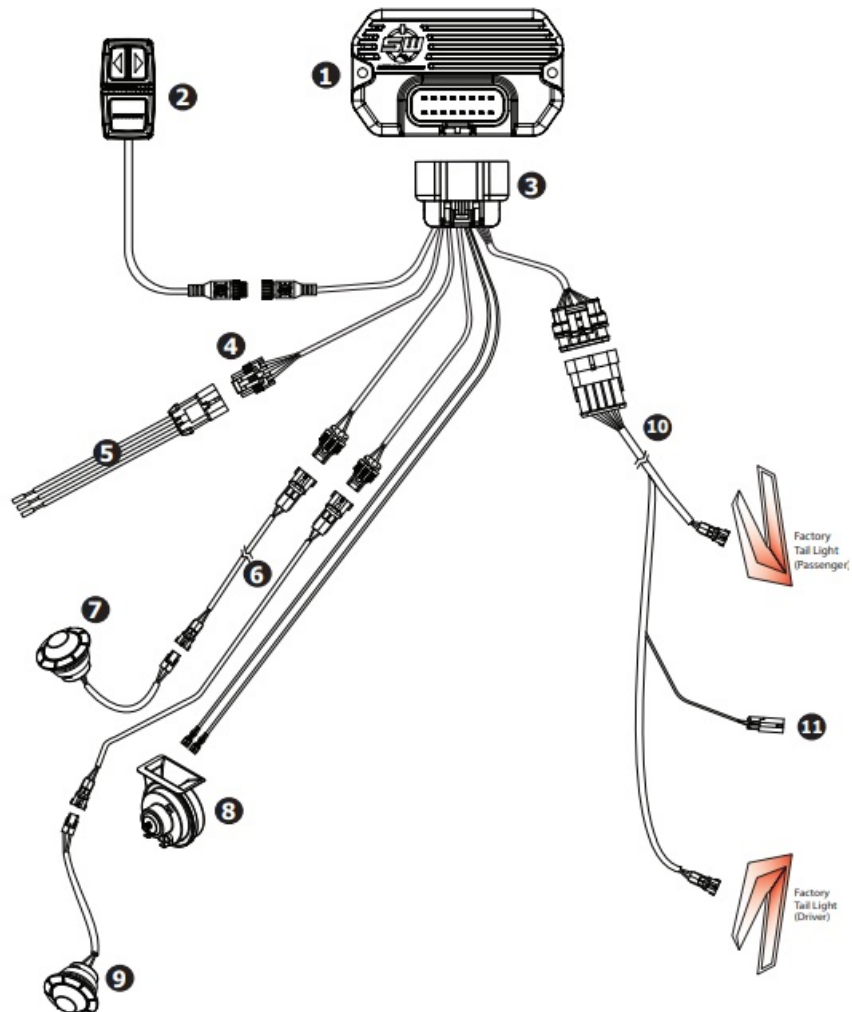

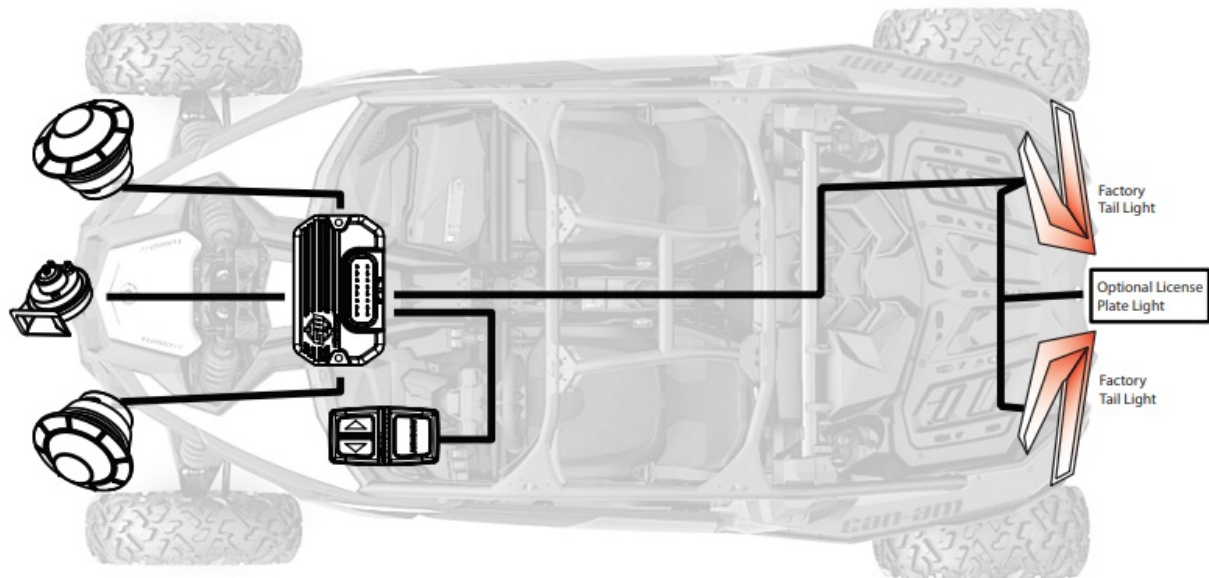


	Description	Part #
1	Tango2 Turn Signal Module	
2	Tango2 Turn Signal Rocker Switch	
3	Tango2 Turn Signal Main Harness	B-H2939
4	Power Connector to Busbar Pulse Connector	
5	Power Input Harness, 3 ft.	B-H3413
6	Front Turn Signal Extension Harness (x2)	B-H2959
7	LED Lamp (Front Right)	B-H2813
8	Tango2 Horn, 500 hz	B-SW-HRN-500
9	LED Lamp (Front Left)	B-H2813
10	Tango2 Mav R Harness (to Rear)	B-H3205
11	To License Plate Light	

TOOLS NEEDED FOR INSTALLATION



- Phillips Screw Driver
- Drill
- 3/4" Hole Saw

INSTALLATION INSTRUCTION

- A. Find a suitable mounting location for the TANGO2 brain module. Secure the module with screws or zip-tie it to a harness.
- B. Use a vacant rocker switch mounting slot and insert the TANGO2 turn signal rocker switch. Run the cable towards the TANGO2 brain module.

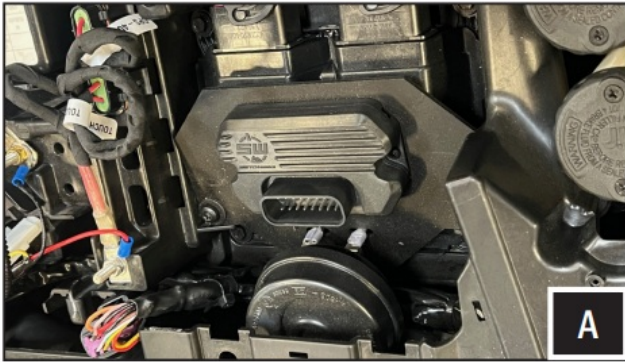

- C. Plug in the controller cable, front turn signal extension cables (B-H2959), and rear turn signal harness (B-H3205) to the TANGO2 main harness (B-H3271).

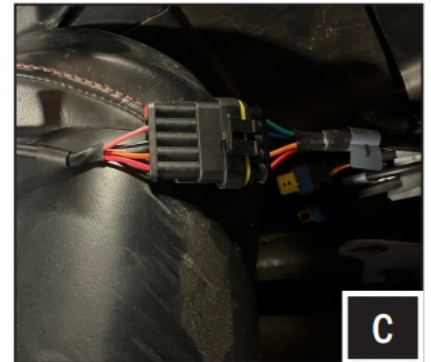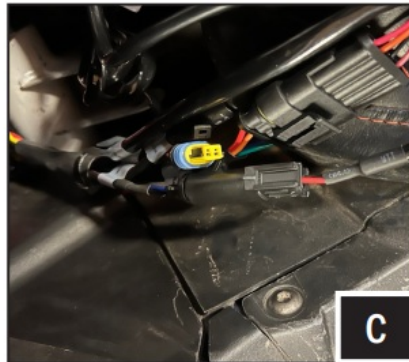

- D. Route the front left and right turn signal extension cables to the front of the vehicle. Make sure to route the correct cable connector end that will plug to the LED lamp. Run the Horn power wires to the desired horn location.
- E. Run the TANGO2 rear turn signal harness (B-H3205) to the vehicle's rear. Use zip ties to protect the cable from moving parts or exhaust pipes.





- F. Drill a 3/4" hole in the front of the vehicle for the front turn signal LED lamp. Refer to the viewing angle diagram on page 6 for proper turn signal LED lamp placement.
- G. Insert the LED turn signal lamp into the hole and push in to lock in place. Repeat steps F and G for the other side.



- H. Connect the front turn signal extension harness to the LED lamp.


- I. Mount the supplied bracket to the horn. Run the horn cable toward the desired horn mounting location.

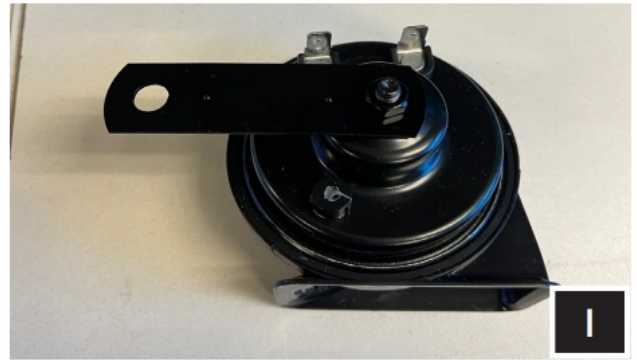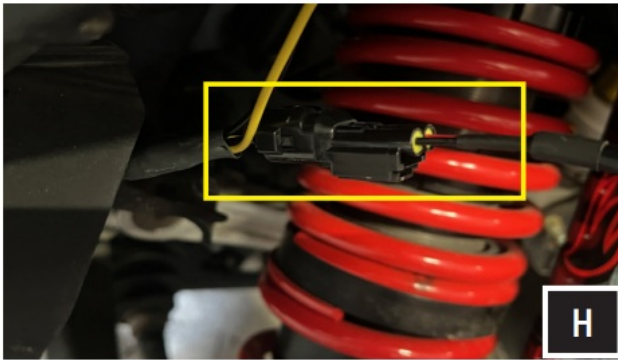

- J. Horn mounting recommendations: 1. Mount away from moving parts; 2. Mount as high as possible; 3—Mount with the horn facing downward to protect from water damage.

Plug in the horn power wires. Either wire can connect to either terminal


- H. Unplug the factory tail light connector and plug it to the “PASS INPUT” connector of the X3 Rear Turn Signal Harness (B-H3205) that was ran to the back of the vehicle on step E.

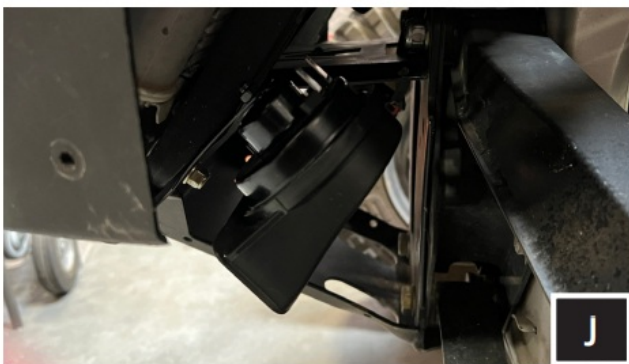



- I. Run the “LIC. PLATE” connector towards the license plate location. Use zip ties to secure the cable away from any moving parts or the exhaust pipe.
- J. Run the “DRIVER OUTPUT” cable to the driver-side tail light. Unplug the factory tail light connector and plug in the “DRIVER OUTPUT” connector of the X3 Rear Turn Signal Harness (B-H3205).



- K. Plug in the provided dummy plug to the factory tail light connector to protect it from the elements
- L. Crimp the ring terminals to the Power Input Harness (B-H3413).L. Plug the 3-pin connector of the Power Input Harnes (B-H3413) to the X3 Turn Signal Main harness (B-H3271).

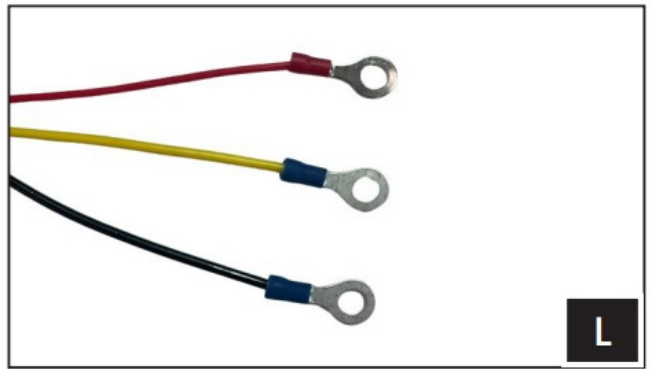


- L. Run the BATT, GND and ACC wires of the Power Input Harness (B-H3413) to the factory busbar (top center of the dashboard) and screw in the ring terminals to the busbar.

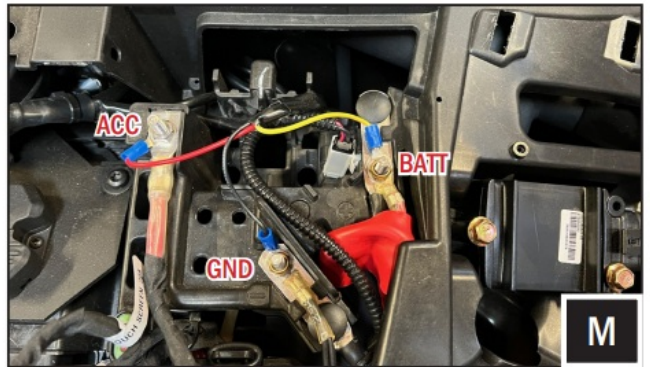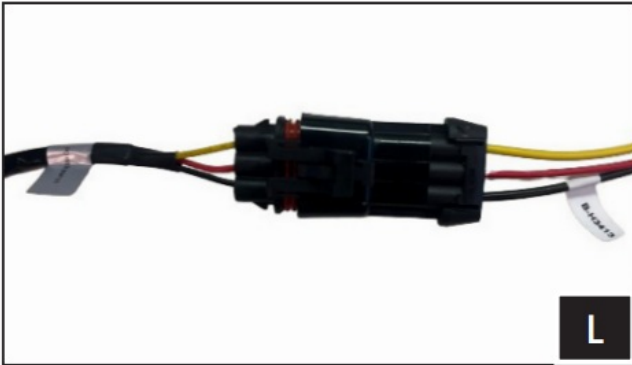


Turn Signal 180 Degree Viewing Angle

Turn signal light should be viewable at a 180 angle from the front and rear of the vehicle.

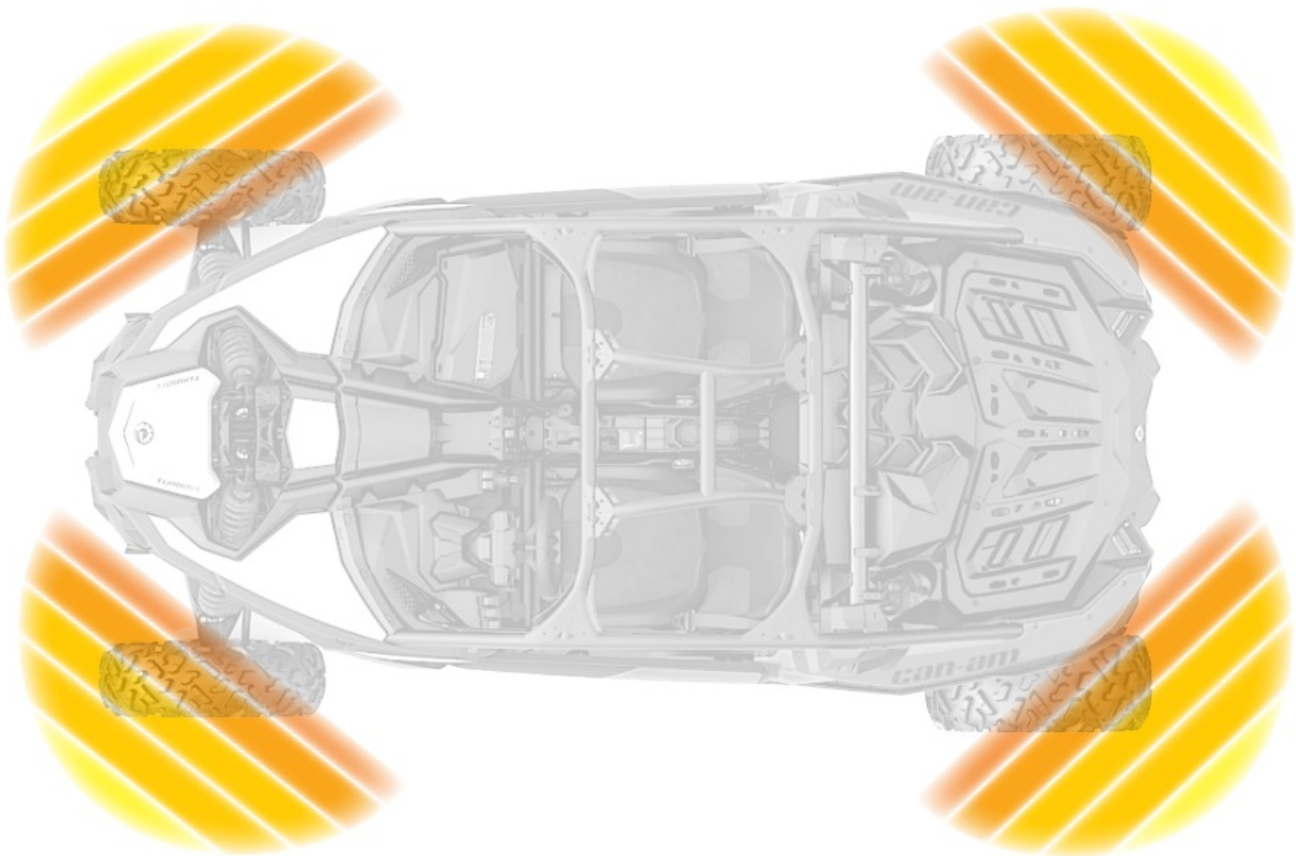

TURN SIGNAL ROCKER SWITCH FUNCTIONS

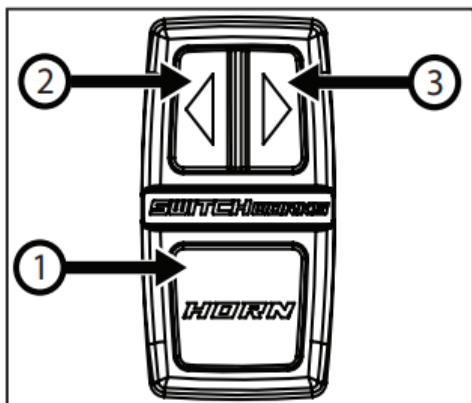

- ① Momentary Press = Horn Button
- ② Momentary Press = Left turn signal with 8-flash auto turn off
Press and Hold (1 sec) = Left turn signal continuous flashing /
Press again to turn off
- ③ Momentary Press = Right turn signal with 8-flash auto turn off
Press and Hold (1 sec) = Right turn signal continuous flashing /
Press again to turn off
- ② + ③ Press and Hold = Hazard lights (also works with ACC off)

LED BACK LIGHT COLOR CHANG



With ACC off, press and hold either the left or right button for 4 seconds until the rocker switch backlight turns bright. Use the left and right buttons to select the color. Press the horn button to save the color.

© 2024 SSV Works, Oxnard, CA 93030 SWTS-MAVR

SWITCH Works is a product by SSV Works. We are committed to your satisfaction and we know you will enjoy our products. If you have questions or need any – assistance, please let us know.


[SSVWORKS.COM](https://ssvworks.com)

1-818-991-1778 EXT 2

SUPPORT@SSVWORKS.COM

Returns must be made within 30 days of purchase date. Claims for missing items or items damaged in transit must be received within five business days of receipt of merchandise. All returns must be in original packaging and in re-sellable condition. Shipping fees are not refundable.

Documents / Resources

	<p>SSV Works 230-SWTS-MAVR Vehicle Specific Turn Signal Kit [pdf] Instruction Manual</p> <p>230-SWTS-MAVR, SWTS-MAVR, B-H2939, 230-SWTS-MAVR Vehicle Specific Turn Signal Kit, 230-SWTS-MAVR, Vehicle Specific Turn Signal Kit, Specific Turn Signal Kit, Signal Kit</p>
---	--

References

- [SSV Works](#)
- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.