

SUNNATA 044389 Button Kit Instruction Manual

Home » SUNNATA » SUNNATA 044389 Button Kit Instruction Manual




Contents

- 1 SUNNATA 044389 Button Kit
- **2 Included Components**
- 3 Help
- **4 Overview**
- 5 Turn power OFF at circuit breaker
- 6 Remove wallplate and wallplate adapter from keypad (if currently
- 7 Remove currently installed button kit and membrane
- 8 Install the new membrane
- 9 Install button kit
- 10 Attach wallplate adapter and wallplate
- 11 Turn power ON at circuit breaker
- 12 System setup
- 13 Documents / Resources
 - 13.1 References
- **14 Related Posts**




SUNNATA 044389 Button Kit

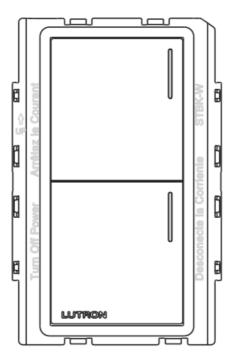

Please read before installing.

Included Components



Help

Sunnata Support Center

For additional support in installing, programming, and troubleshooting <u>lutron.com/SunnataKeypadSupport</u>


Call us:

U.S.A. | Canada | Caribbean 1.844.LUTRON1 (588.7661) (24/7) Mexico +1.888.235.2910 Others +1.610.282.3800

Limited Warranty:

For warranty information, please see the warranty enclosed with the product, or visit www.lutron.com/resiinfo
Lutron, Lutron, RadioRA, RadioRA 3, Claro, Satin Colors, HomeWorks and Sunnata are trademarks or registered trademarks of Lutron Electronics Co., Inc. in the US and/or other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries. All other product names, logos, and brands are property of their respective owners. ©2021–2022 Lutron Electronics Co., Inc.

Overview



The Replacement Button Kits for Sunnata Keypads allow for the customization of the keypad. Replacement Button Kits may be used to change the color, button configuration, or add personalized printing that clearly identifies each button's function.

IMPORTANT

- 1. Mounting: Ensure all controls are correctly wired and mounted before installing Replacement Kits or wallplates. Confirm controls are free from debris (e.g., plaster, spackling compound) before installing Replacement Kits or wallplates.
- 2. Wallplates: Use only Lutron wallplates with these keypads. The mechanical design of the keypad may not be compatible with non-Lutron wallplates. Non-Lutron wallplates may not sit flush against the wall. Claro and Satin Colors wallplates are designed for best color match and clean aesthetic appearance. Do not paint controls, buttons, or wallplates.
- 3. Cleaning: For disinfecting keypad, please refer to App Note #758 (048758). See Sunnata Keypad Support Center link in Help Section.


Turn power OFF at circuit breaker



WARNING:


ELECTRIC SHOCK HAZARD. May result in Serious Injury or Death. Turn off power at circuit breaker or fuse before installing.

Remove wallplate and wallplate adapter from keypad (if currently attached)




Remove currently installed button kit and membrane

Using a small, flat blade screwdriver, remove button kit from keypad by gently prying at the locations shown in the image, then remove the membrane.

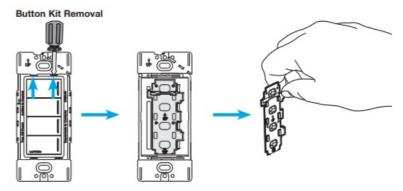


Install the new membrane


"UP" arrow on part indicates proper orientation.



Install button kit



Attach wallplate adapter and wallplate



Turn power ON at circuit breaker



System setup

Refer to specific system programming software if the number of buttons was altered. For example, changing a 2-Button to a 4-Button.

Documents / Resources



SUNNATA 044389 Button Kit [pdf] Instruction Manual 044389, Button Kit, 044389 Button Kit, Kit

References

- <u>Lutron Support Center</u>
- Product Selection Page

Manuals+,