



[Home](#) » [super bright leds](#) » **Super Bright LEDs DMSTRB-A6 Round LED Vehicle Strobe Light User Manual** 

Contents [[hide](#)]

- [1 Super Bright LEDs DMSTRB-A6 Round LED Vehicle Strobe Light](#)
- [2 Product Usage Instructions](#)
- [3 Included Parts](#)
- [4 Accessories](#)
- [5 Installation](#)
- [6 Operation](#)
- [7 Dimensional Drawings](#)
- [8 Specifications](#)
- [9 Wiring Diagram](#)
- [10 CONTACT](#)
- [11 FAQ](#)
- [12 Documents / Resources](#)
 - [12.1 References](#)

superbrightleds.com®

Super Bright LEDs DMSTRB-A6 Round LED Vehicle Strobe Light



Product Usage Instructions

- Surface strobe can be mounted with the included bracket or flush mounted in a 0.90" (22.8mm) hole with the included rubber gasket.
- This light head can be synchronized with others of the same family of light heads.
- To sync, ensure the lights are on the same pattern to start.
- Connecting the white wire to the power for one second will select the next flash pattern.
- Lights will return to the last pattern selected when power is cycled.

Important Notes

- Before making any connections to the automotive wiring, always disconnect the battery negative terminal.

Included Parts

- 1- Round LED Vehicle Strobe Light
- 1- Mounting Bracket with Rubber Gasket
- 2- Mounting Screws
- 1 – Locking Screw
- 2- Mounting Screw washer

- 2 – Nuts

Accessories

- Switch Kit (SWK-PM)
- Fuse Holder (WMFH)
- Fuse (MAF-x)

Wiring

- Red – Power In(+)
- Black – Ground In (-)
- White – Pattern Select (Momentary +)
 - – or –
- Set to Sync (Constant +)
- Green – Sync Control

Installation


- Surface strobe can be mounted with the included bracket or flush mounted in a (0.90", 22.8mm) hole with the included rubber gasket.

Operation

- This light head can be synchronized with others of the same family of light heads.
- In order to sync, the lights should be on the same pattern to start.
- Connecting the white wire to the power for one second will select the next flash pattern. Lights will return to the last pattern selected when power is cycled.

Warning: Before making any connections to the automotive wiring, always disconnect the battery negative terminal

Dimensional Drawings

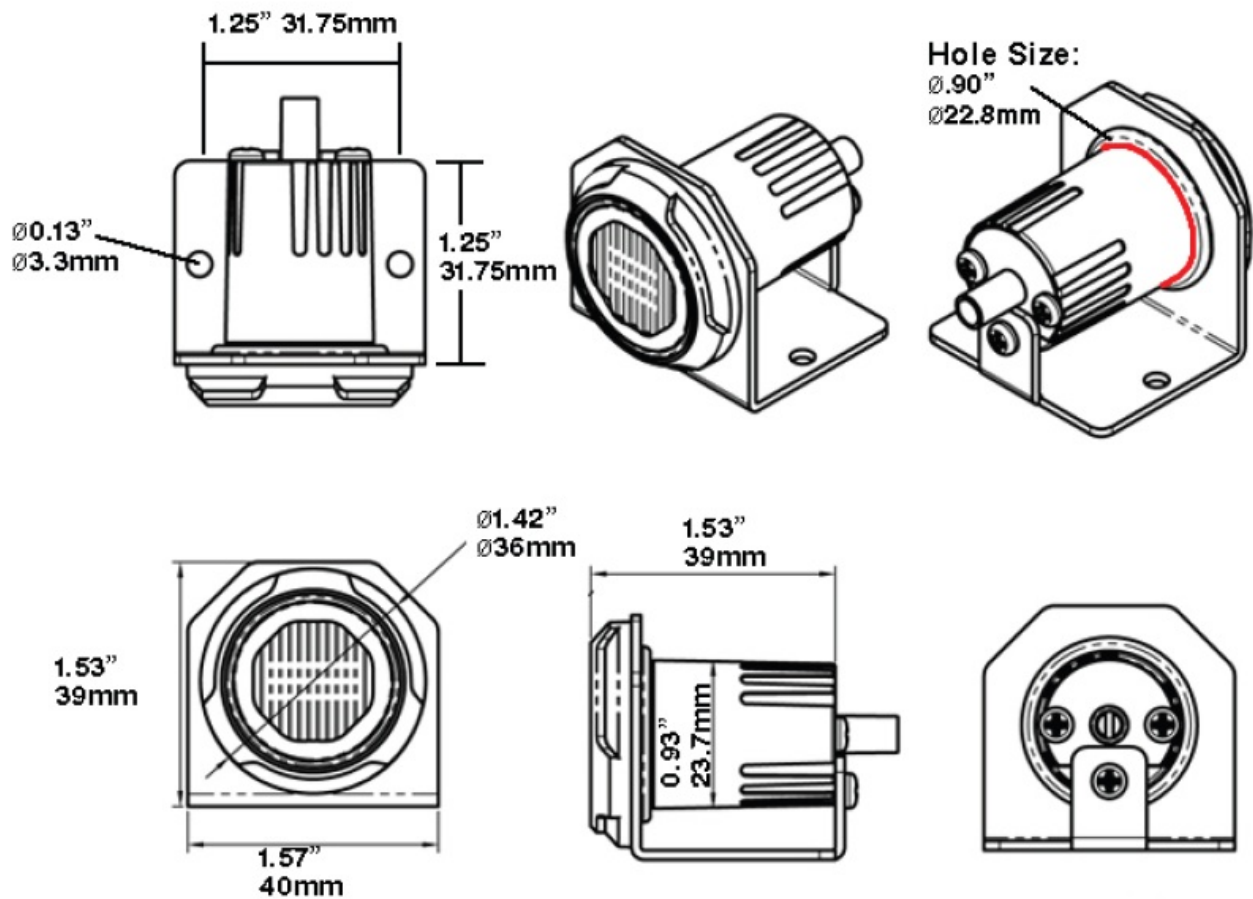

Specifications

DMSTRB-x	
Voltage	12~24 VDC
Current Typical	.25A @ 12 VDC / .13A @ 24 VDC
Average Power	6 Watts
IP Rating	Waterproof IP67
Mounting Type	Surface Mount / Flush
Number of LEDs	4
Wire Length	8in (20.3cm)
Housing Material	Painted Aluminum
Lens Material	Polycarbonate

Recommended Fuse Rating	2A/Light Head
Operating Temperature	-22 °F ~ 185 °F (-30 °C ~ 85 °C)
Weight	3.2 oz (90 g)
Certification	SAE J595 Class1
Warranty	Lifetime

Single Color Flash Patterns


Pattern	Master Light Head	Sync Light Head	Sync Notes
1	Half Steady / Half Double	As Master	Sync with Master
2	All Steady / Auto Dimming	As Master	Sync with Master
3	Random Patterns	Random as Master	Sync Pattern Changes
4	Half Single Alternate	As Master	Sync with Master
5	Half Double Alternate	As Master	Sync with Master
6	Half Quad Alternate	As Master	Sync with Master
7	Half Quint Alternate	As Master	Sync with Master
8	Half Single Mega Alternate	As Master	Sync with Master
9	Half Ultra Alternate	As Master	Sync with Master
10	Half Single Alternate / Half Quad Alternate	Random as Master	Sync Pattern Changes
11	All Single	As Master	Alternate with Master
12	Half Single Alternate / Half Mega Alternate	Random as Master	Sync Pattern Changes
13	All Single	As Master	Sync with Master
14	All Double	As Master	Sync with Master
15	All Quad	As Master	Sync with Master
16	All Quint	As Master	Sync with Master
17	All Mega	As Master	Sync with Master
18	All Ultra	As Master	Sync with Master
19	All Single / All Quad	Random as Master	Sync Pattern Changes
20	All Single / All Mega	As Master	Sync with Master



WARNING

- Do not look directly into LEDs while in operation; it may cause momentary blindness and/or eye damage.

Wiring Diagram

- Black Wire: Ground or -VDC
- Green Wire: Synchronized Wire
- Red Wire: Power or +VDC
- White Wire: Flash Functions

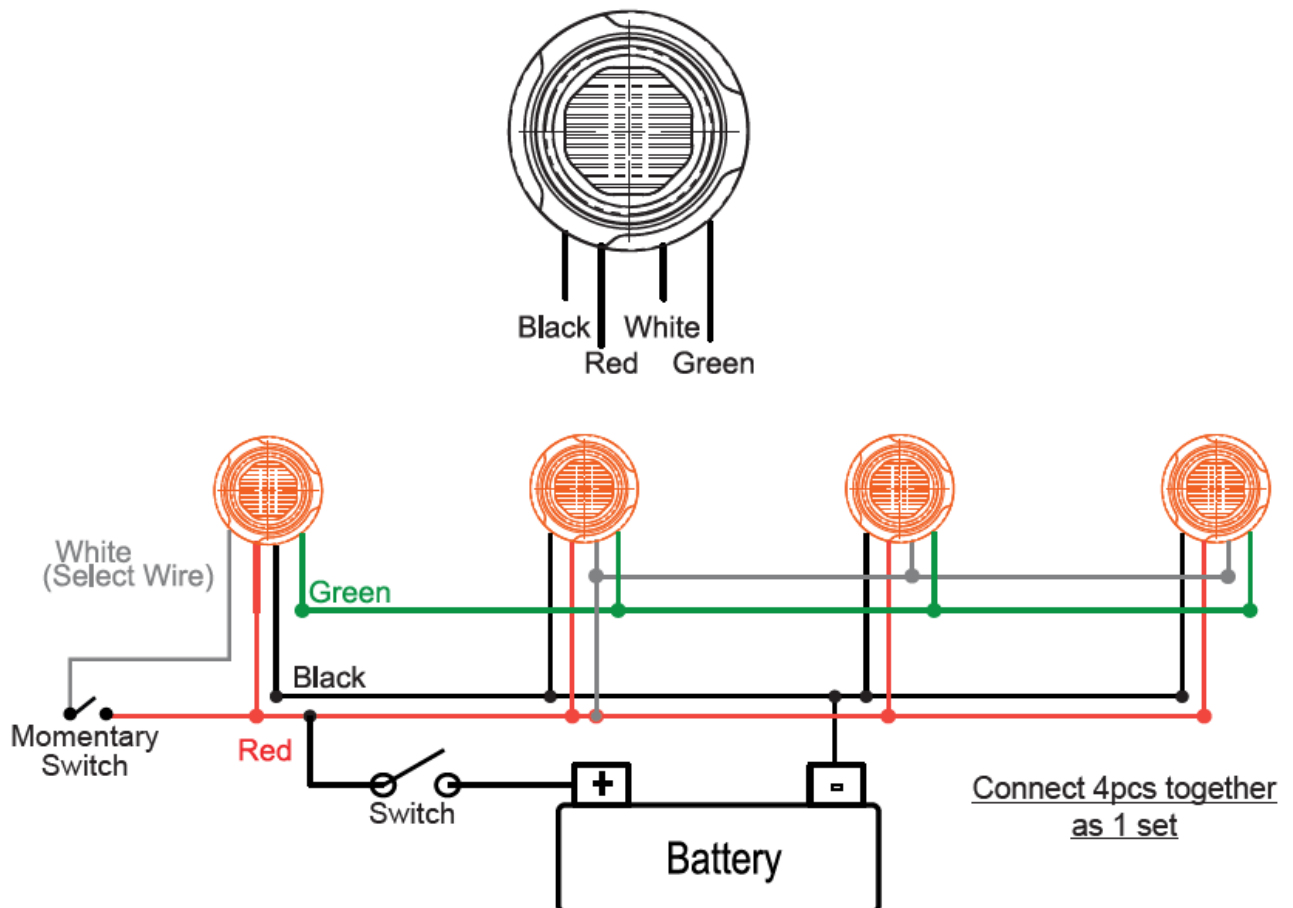

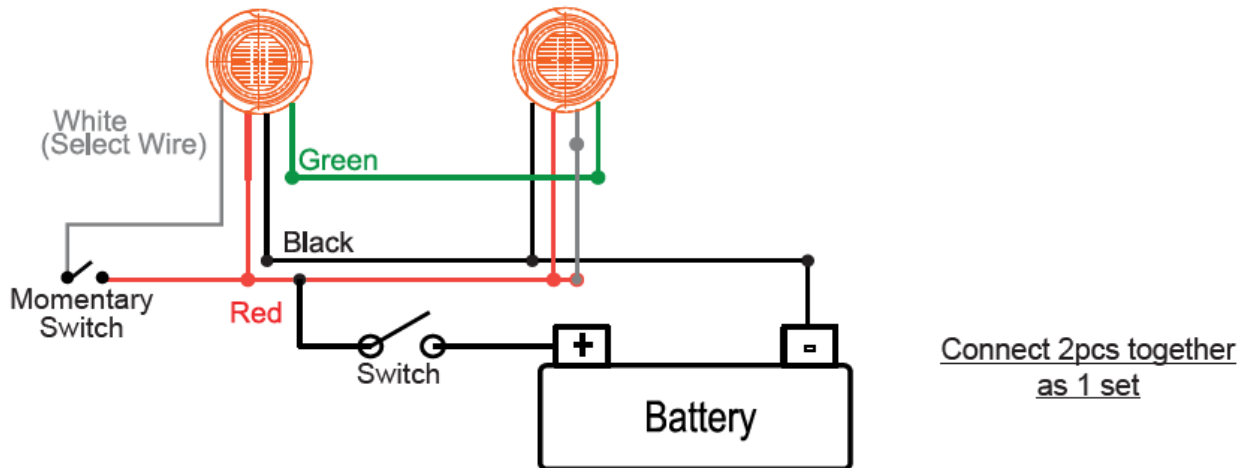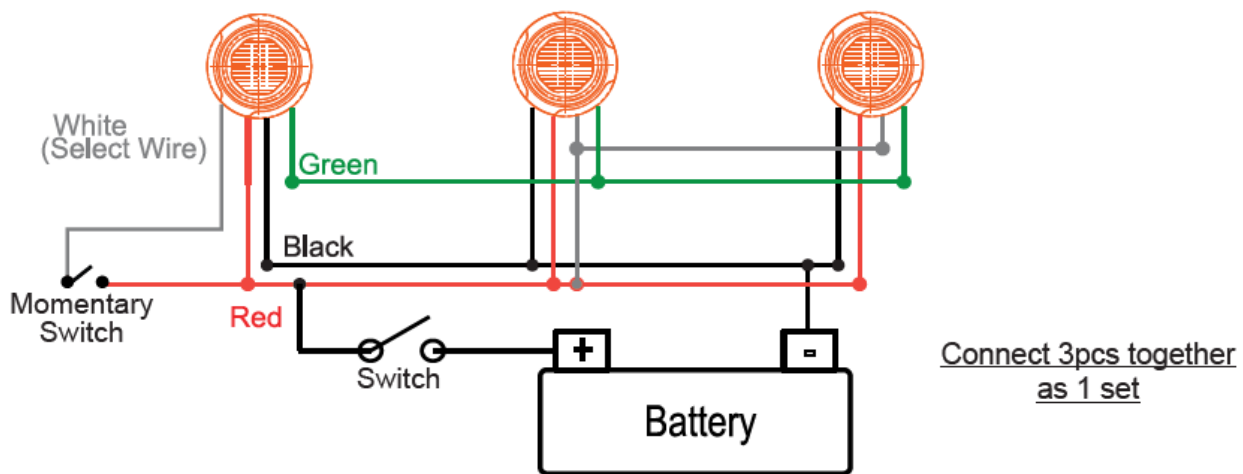

WARNING

- Do not look directly into LEDs while in operation; it may cause momentary blindness and/or eye damage

CONTACT


- Rev Date: V2 04/11/2025
- 4400 Earth City Expy, St. Louis, MO 63045 866.590.3533 superbrightleds.com

FAQ

- **Q: Can I sync multiple light heads together?**
 - **A:** Yes, this light head can be synchronized with others of the same family of light heads.
- **Q: How do I change the flash pattern of the light head?**
 - **A:** Connecting the white wire to the power for one second will select the next flash pattern.

- **Q: What is the recommended fuse rating for this product?**
 - **A:** The recommended fuse rating is not specified in the manual, but it is recommended to use a fuse holder and fuse for safety.

Documents / Resources

	<p>Super Bright LEDs DMSTRB-A6 Round LED Vehicle Strobe Light [pdf] User Manual</p> <p>DMSTRB-A6, DMSTRB-AW6, DMSTRB-R6, DMSTRB-RB6, DMSTRB-A6 Round LED Vehicle Strobe Light, DMSTRB-A6, Round LED Vehicle Strobe Light, Vehicle Strobe Light, Strobe Light, Light</p>
-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

References

- [User Manual](#)

super bright
leds

DMSTRB-A6, DMSTRB-A6 Round LED Vehicle Strobe Light, DMSTRB-AW6, DMSTRB-R6, DMSTRB-RB6, Light, Round LED Vehicle Strobe Light, Strobe light, super bright leds, Vehicle Strobe Light

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.