



# SUPERATV Polaris RZR Pro R Flip Windshield Instruction Manual

[Home](#) » [SUPERATV](#) » SUPERATV Polaris RZR Pro R Flip Windshield Instruction Manual 



2753 Michigan Road • Madison, Indiana 47250 • 855-743-3427

INSTALLATION INSTRUCTIONS


Flip Windshield: for Polaris RZR Pro R®

## Contents

- [1 Polaris RZR Pro R Flip Windshield](#)
- [2 Windshield Cleaning:](#)
- [3 Liability Statement](#)
- [4 Documents / Resources](#)
  - [4.1 References](#)
- [5 Related Posts](#)

## Polaris RZR Pro R Flip Windshield


- Do not discard packaging until the product has been successfully installed.
- SuperATV does not recommend keeping the Windshield installed while transporting on an open-air trailer. Remove or secure with straps.
- This item is not returnable if the protective film has been removed.
- Test fit to the cage to confirm fitment before removing the film.

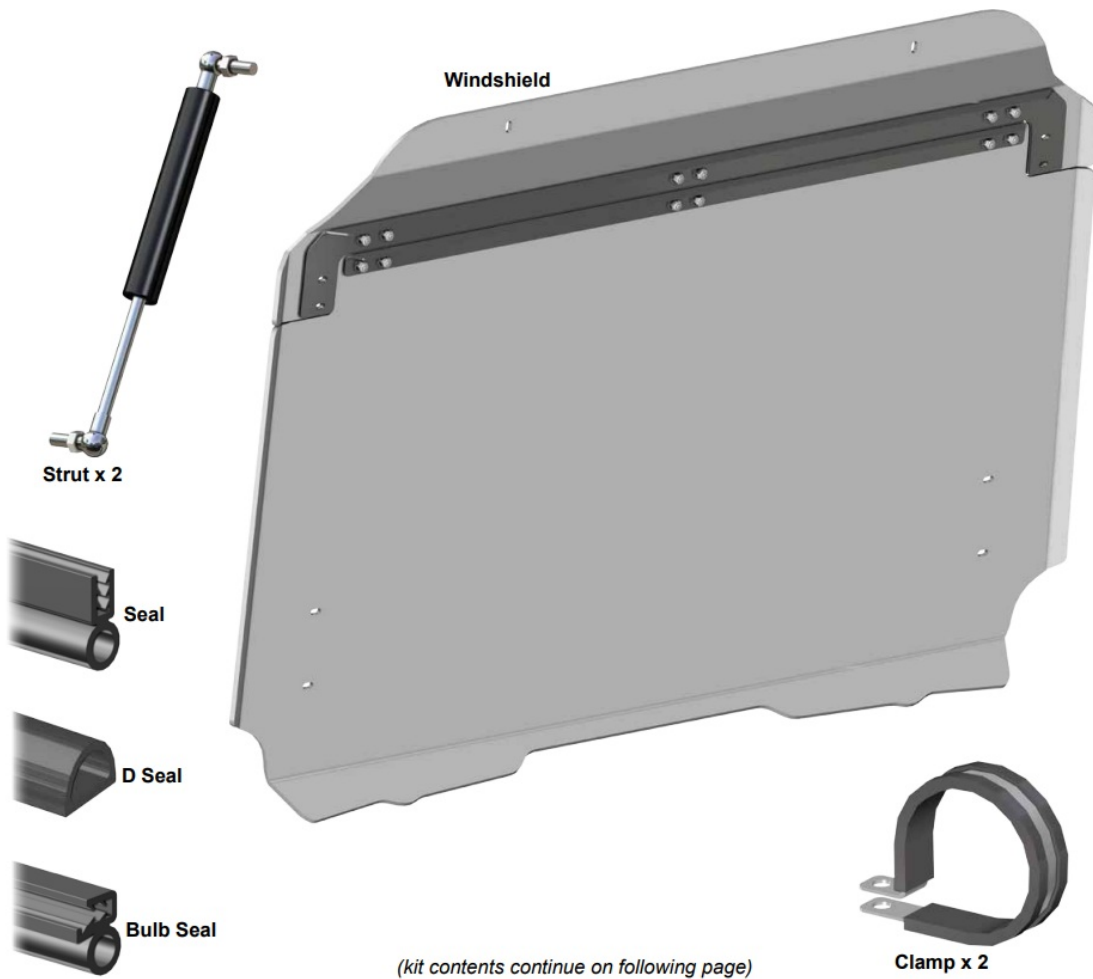

(kit contents continued)



remove Screws from Clamps and  
place Clamps in open position

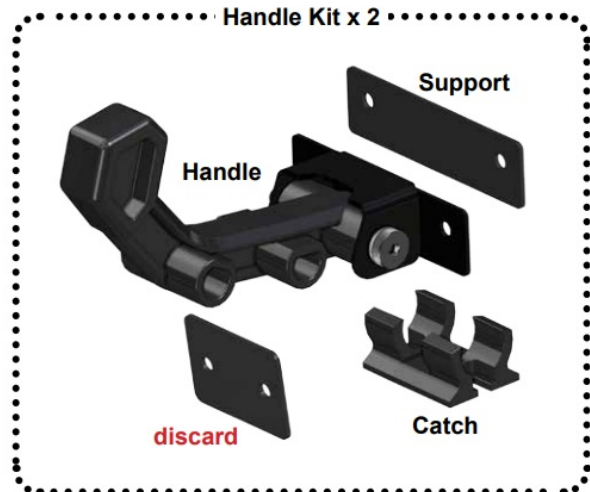

Windshield Cleaning:

- Do not use Rain-X®, Plexus® or any other protector, wax, or polish.
- Do not use window cleaning fluids (Windex, 409, etc) or any solvents (gasoline, denatured alcohol, acetone, etc).
- Never use abrasive cleaners, abrasive pads, or gritty cloths.
- Do not use a windshield wiper blade or install a motorized windshield wiper
- Never use razor blades, scrapers, squeegees, brushes, etc.


1. Thoroughly rinse the Windshield to float off dirt and mud.
2. Using a soft cloth, or microfiber cloth, clean the Windshield with warm water and a gentle detergent. Baby shampoo, rubbing alcohol, or hand-washing soap can also be used.
3. To prevent water spots, use a chamois to blot the Windshield dry.

## **Liability Statement**

SuperATV's® products are designed to best fit the user's ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory or aftermarket parts will void any warranty provided by SuperATV® and is not recommended. SuperATV's® products could interfere with other aftermarket accessories. If the user has aftermarket products on the machine, contact SuperATV® to verify that they will work together. Although SuperATV® has thousands of satisfied customers, users should be aware that installing lift kits, long travel, suspension kits, tires, etc. will change the ride of the machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases the risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect users from severe injury or death. SuperATV® urges operators and occupants to wear a helmet and appropriate riding gear at all times. By purchasing and installing SuperATV® products, the user agrees that should damage occur, SuperATV® will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV®, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV®. The total liability of the seller to the user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim. SuperATV® will warranty only parts provided by SuperATV®. Any damage or problems with OEM housings, bearings, seals, or other manufacturers' products will not be covered by SuperATV®. SuperATV® parts and products are not warranted if the item was not installed properly, misused, or modified. Installing, adding, modifying, or fabricating any factory or aftermarket product to your ATV/UTV may violate certain local, state, and federal laws. Be advised that laws vary depending on the town, city, county, state, etc. Use of certain products on public streets, roads, or highways may be in violation of the law. The Buyer is solely and exclusively legally and personally responsible for any violation of the law by the installation or use of the product. You must abide by all local, state, and federal laws, including but not limited to vehicle safety, traffic laws, and ordinances. It is your responsibility to know the laws and how they apply to you. The Buyer is responsible for fully understanding the capability and limitations of his/her vehicle according to manufacturer specifications, warnings and instructions and agrees to hold SuperATV® harmless from any damage resulting from failure to adhere to such specifications, warnings, and/or instructions. The Buyer is also responsible to obey all applicable federal, state, and local laws and ordinances when operating his/her vehicle while using this product, and the Buyer agrees to hold SuperATV violation thereof.® harmless from any


To ease installation, soak Seals in hot water before cutting or installing to increase flexibility.

Install Bulb Seal along top edge of Windshield as shown.

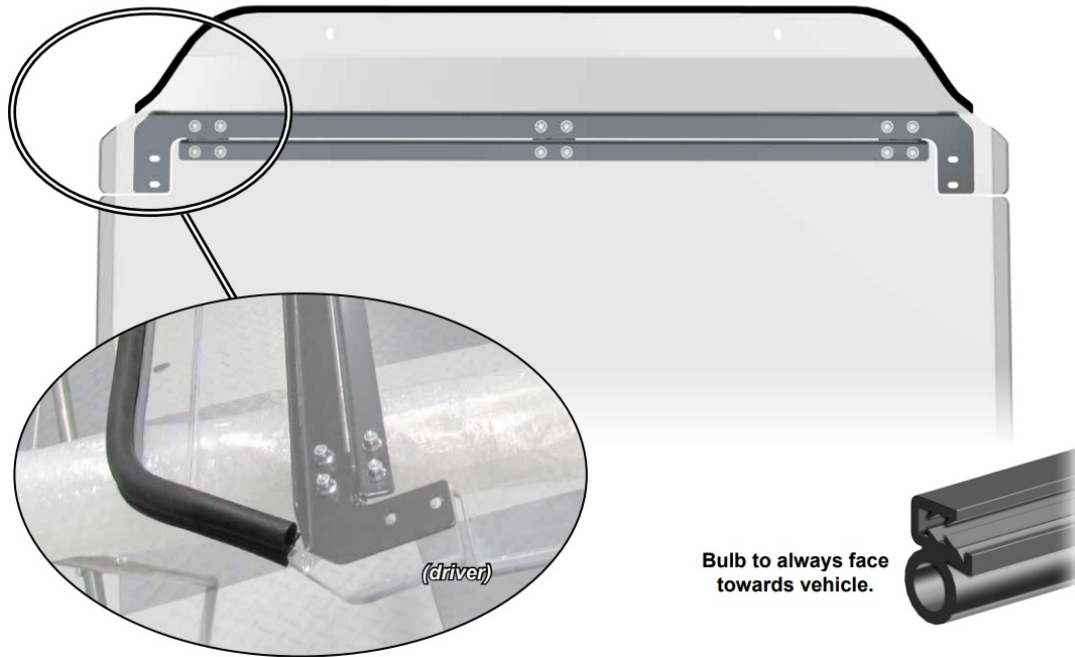


Install Seal along lower edge of Windshield as shown.


- Install Catch to Catch Bracket.
- Hardware included with Catch; do not tighten.
- Repeat for the remaining Catch Bracket.

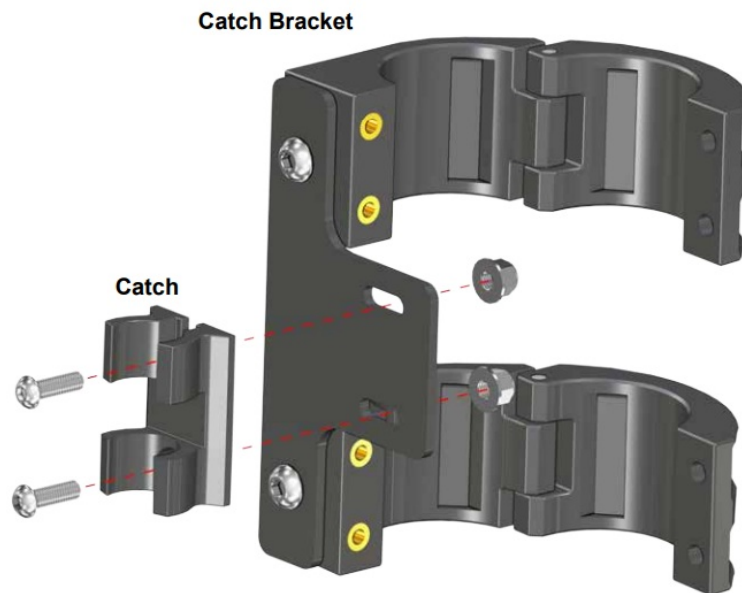

- Loosely install Bracket Assembly; use Screws previously removed from Clamps.
- Repeat for the driver's side.

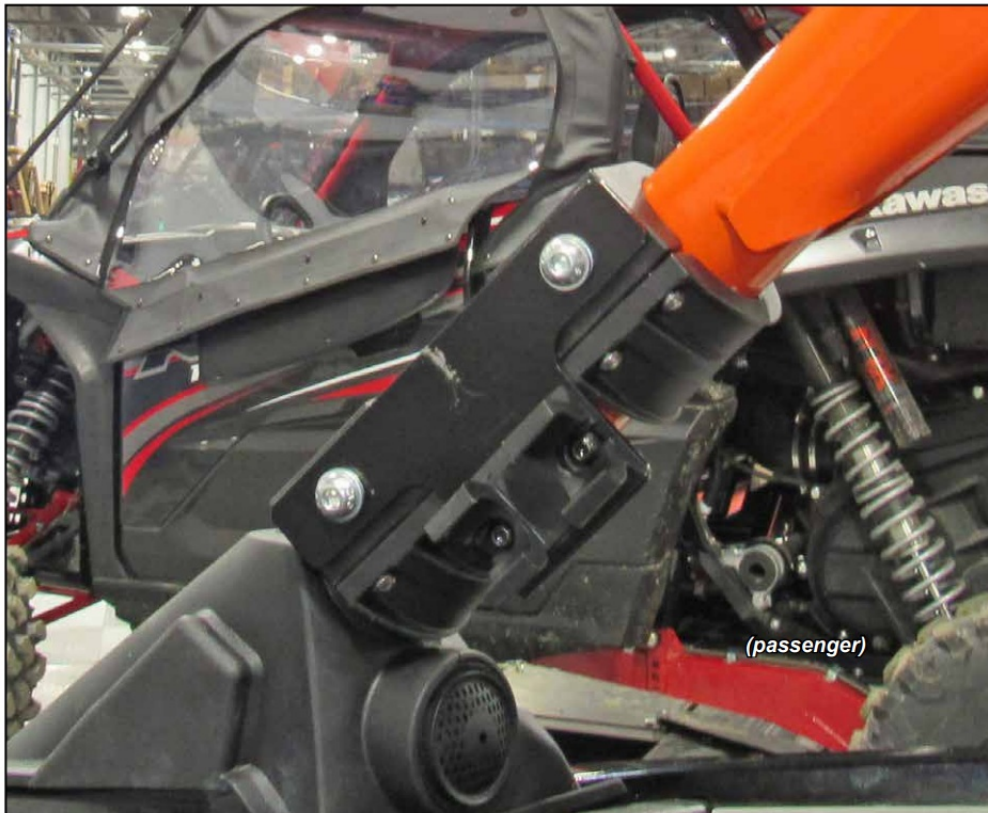

**Use hand tools only when assembling.**

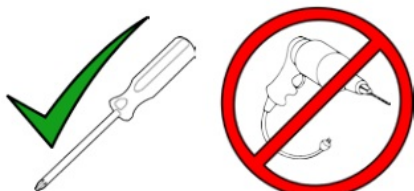


**Do not use power tools.**

**Rubber must face plastic when installing Sealing Washers.**






- Place Clamps around Cage.
- Secure the Windshield to Clamps with the hardware shown.

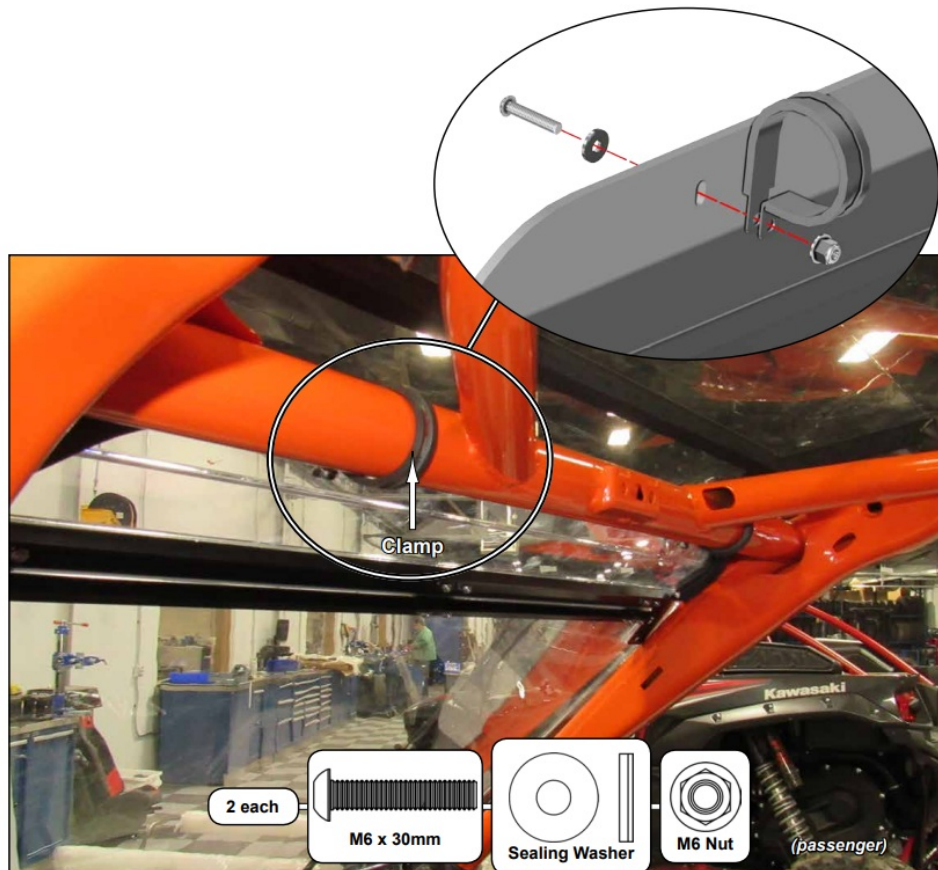


– Assemble Pinch Brackets to Upper Brackets with the hardware shown; do not tighten.

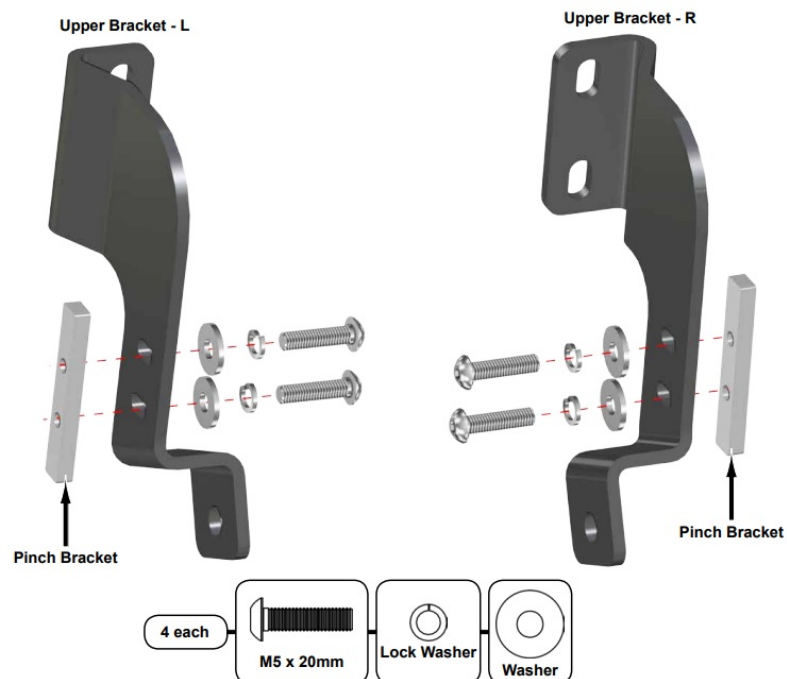


- Install Upper Bracket – R to Frame; do not tighten.
- Secure Upper Bracket – R to Windshield with hardware shown; do not tighten.
- Repeat for Upper Bracket – L.



- Install Handle, Support, and Handle Bracket to the Windshield with the hardware is shown; do not tighten.
- Repeat for the opposite side.

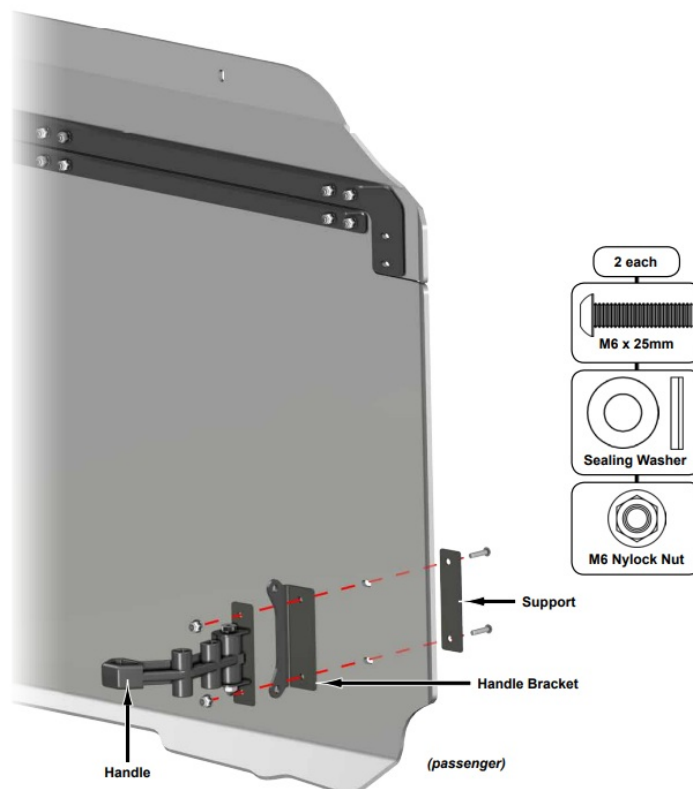


- Place the Windshield in the open position and secure the Struts to Handle Brackets and Upper Brackets with hardware is shown; tighten hardware

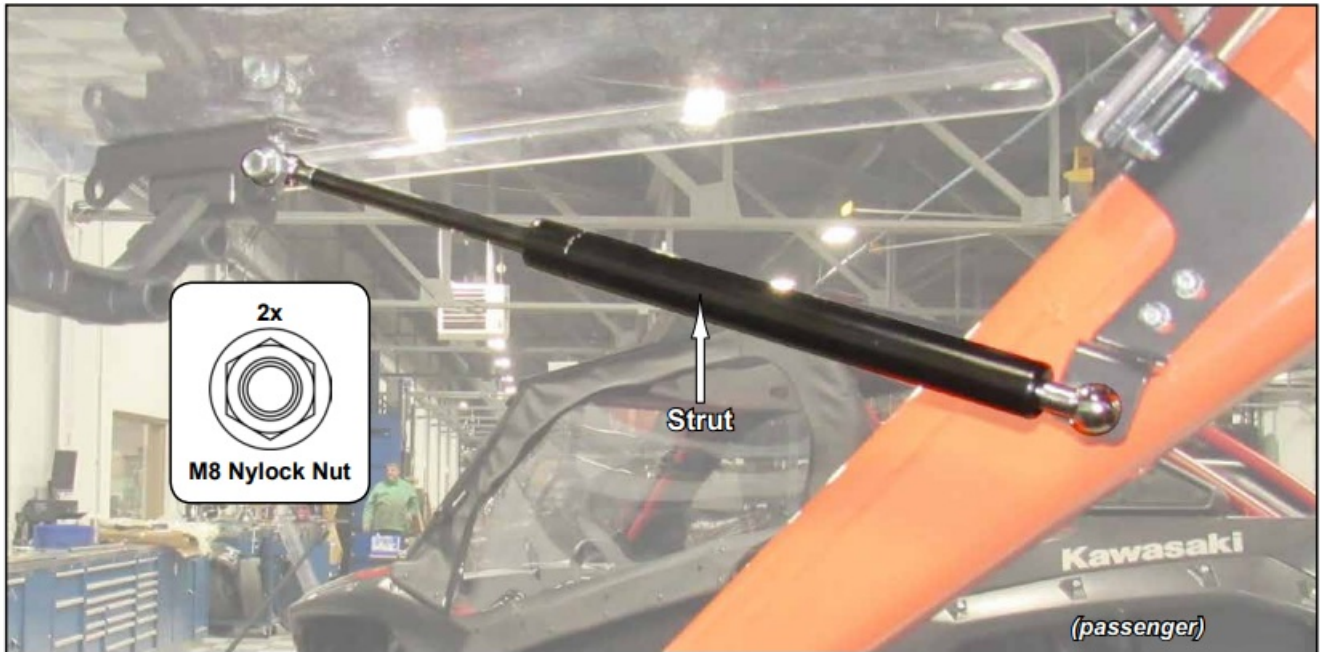


- Close the Windshield and engage each Handle to Catch.
- Verify that Windshield is aligned to the machine and tighten all hardware completely.




Brackets shown to be parallel

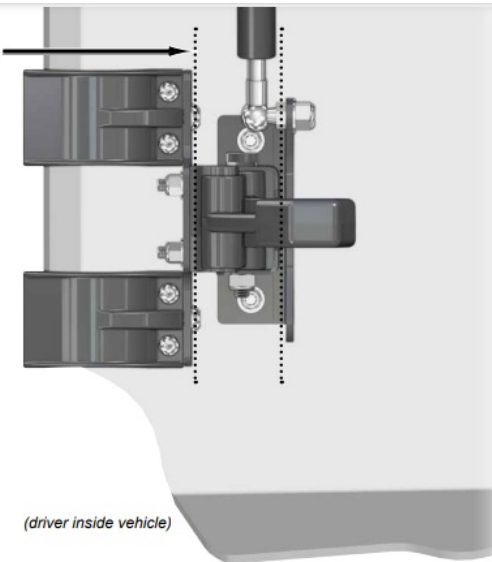

(driver inside vehicle)

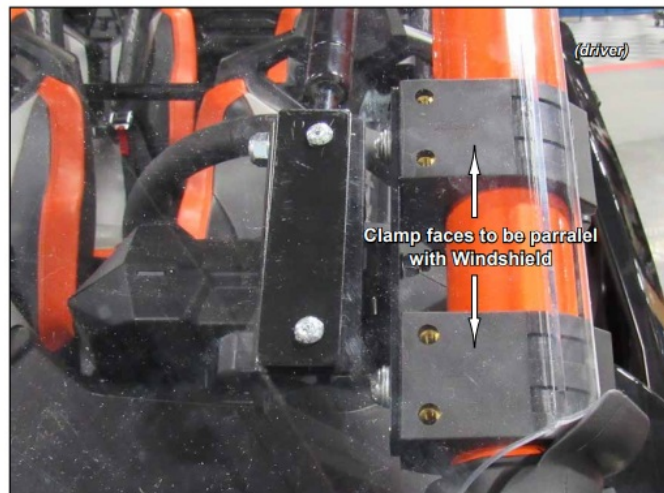

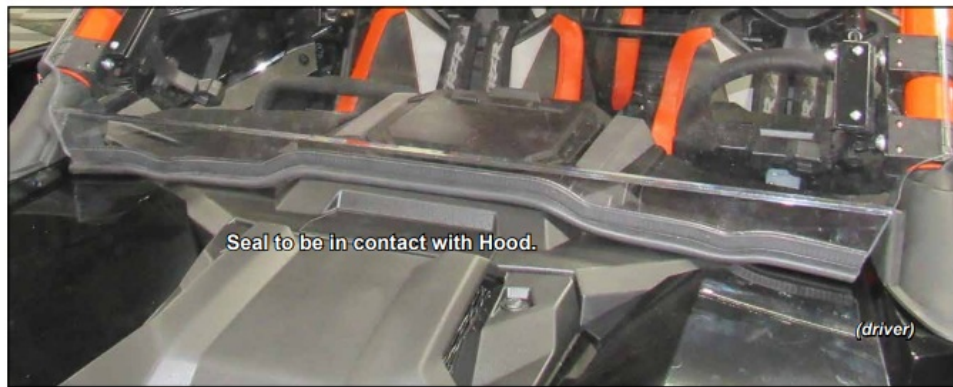

Read instructions and view illustrations before beginning.  
Thank You  
For Choosing

**Need help with your installation?**



[sales@superatv.com](mailto:sales@superatv.com)



[www.superatv.com](http://www.superatv.com)



1-855-743-3427



8:00am – 8:00pm EST M-Th

8:00am – 7:00pm EST Friday

9:00am – 2:00pm EST Saturday



## Documents / Resources



**[SUPERATV Polaris RZR Pro R Flip Windshield](#)** [pdf] Instruction Manual

Polaris RZR Pro R Flip Windshield, Polaris RZR Pro R, Flip Windshield, Polaris Windshield, RZR Pro R Windshield, Pro R Windshield, PZR Windshield, Windshield

## References

-  [SuperATV.com](https://www.SuperATV.com)
-  [superatv.com](https://www.superatv.com)

Manuals+.