



Surennoo SLC1602P Series LCD Module User Manual

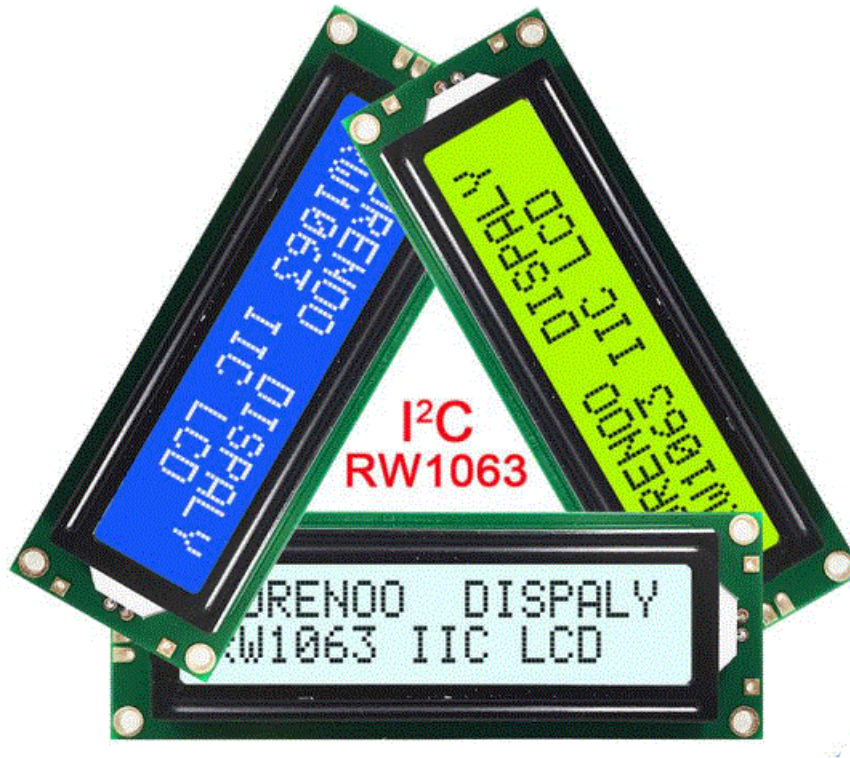
[Home](#) » [Surennoo](#) » Surennoo SLC1602P Series LCD Module User Manual 

Contents

- 1 SLC1602P Series LCD Module
- 2 Product Information
- 3 Product Usage Instructions
- 4 ORDERING INFORMATION
- 5 SPECIFICATION
- 6 OUTLINE DRAWING
- 7 ELECTRICAL SPECIFICATIONS
- 8 INSPECTION CRITERIA
- 9 PRECAUTIONS FOR USING
- 10 USING LCD MODULES
- 11 Limited Warranty
- 12 Documents / Resources
 - 12.1 References
- 13 Related Posts



SLC1602P Series LCD Module



Product Information

The SLC1602P Series is an LCD module manufactured by Shenzhen Surenoo Technology Co., Ltd. The model number for this particular module is S3ALC1602P. The company's website is www.surenoo.com and their Skype handle is Surenoo365. The module's reference controller datasheet and character LCD selection guide are available on the website.

ELECTRICAL SPEC Pin Configuration (5.0V)

4.2 Absolute Maximum Ratings

Ordering Information

The ordering information for the SLC1602P Series module is available in the 1602P Series Table, which can be found in the user manual. The manual also includes an image of the module for reference.

Specification

The module's specifications are detailed in the user manual and include display, mechanical, electrical, and optical specifications.

Outline Drawing

The outline drawing for the module is also included in the user manual.

Electrical Spec

The electrical specifications for the module are detailed in the user manual and include pin configuration, absolute maximum ratings, and electrical characteristics.

Inspection Criteria

The user manual includes information on inspection criteria for the module, including acceptable quality level, definition of lot, and cosmetic inspection criteria for both the module and screen (both non-operating and operating).

Product Usage Instructions


1. Refer to the ordering information in the user manual to ensure you have the correct SLC1602P Series module for your needs.
2. Review the module's specifications to understand its capabilities and limitations.
3. Refer to the outline drawing to understand the physical dimensions of the module.
4. Review the electrical specifications and pin configuration to ensure proper wiring and power supply.
5. Follow the inspection criteria to ensure the module meets the necessary quality standards.
6. Install the module according to your specific application needs, using the information provided in the user manual as a guide.
7. Test the module to ensure it is functioning properly.



Shenzhen Surenoo Technology Co.,Ltd. www.surennoo.com
Skype: Surenoo365

ORDERING INFORMATION


SLC1602P Series Table

Model No.	Interface	Display	Outline Size (MM)	Viewing Area (MM)	Area Area (MM)	Voltage (V)	Controller	Mark	Color Code	IMAGE (BUY IT NOW)
SLC1602P	I ² C	16*02	86.00*30.00	64.50*14.50	57.20*11.00	5.0V	RW1063 or Equal	IIC Interface	YGVIT BLWIT FPWIT	

SLC1602P Series Image

The number of series image is in accordance with number of the above series table 1.1.

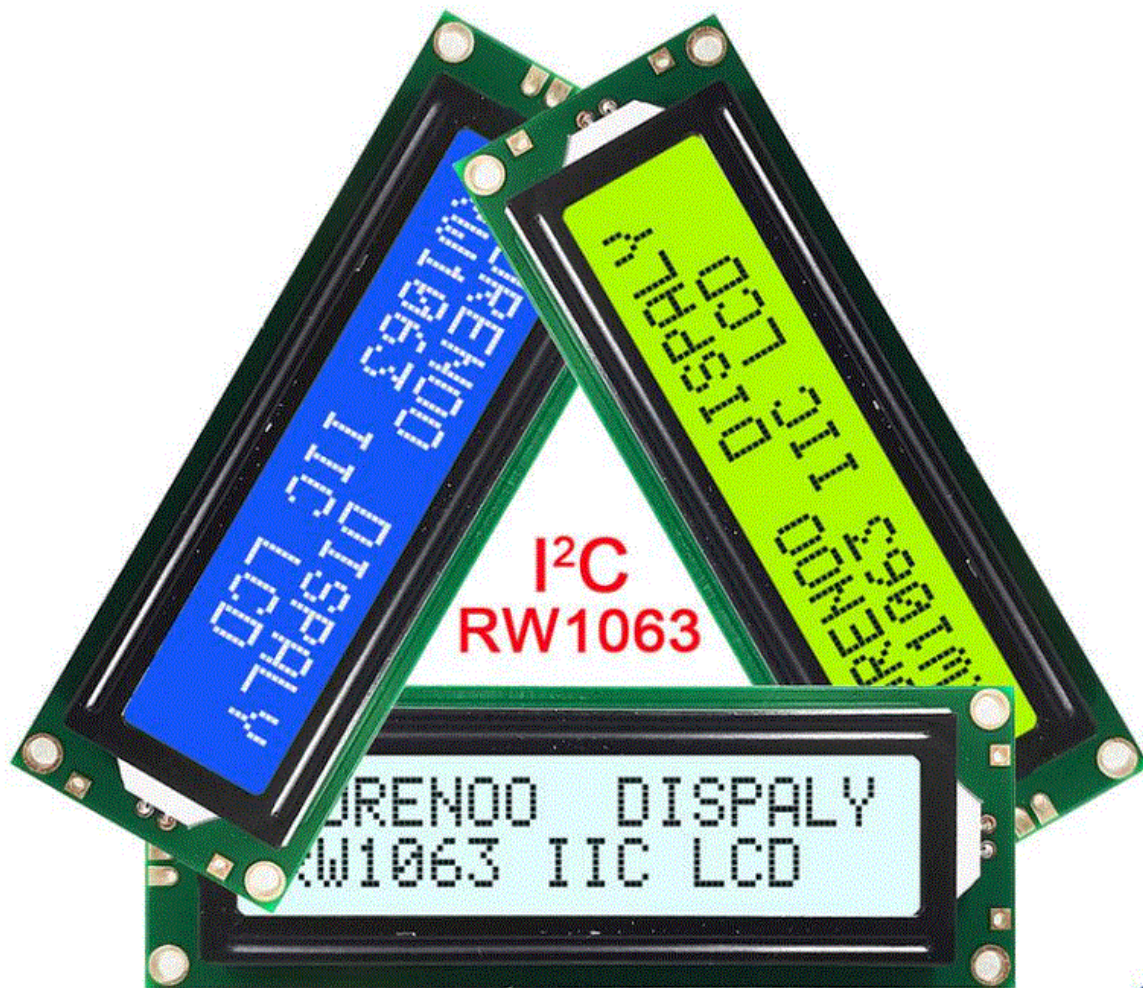Build-in IIC 1602 Character LCD Module



Surenno Display

SPECIFICATION

2.1 Display Specification

ITEM	STANDARD VALUE	UNIT
Resolution	16 Characters x 2 Lines	--
Display Connector	Pin Header 4P/2.54	--
Operating Temperature	-20 ~ +70	°C
Storage Temperature	-30 ~ +80	°C
Touch Panel Optional	N/A	--
Font Chip Optional	N/A	--
*Sunlight Readable		--

2.2 Mechanical Specification

ITEM	STANDARD VALUE	UNIT
Outline Dimension	86.0(W) × 30.0(H) × 11.0(T) (MAX)	mm
Visual Area	64.50(W) × 14.50(H)	mm
Active Area	55.70(W) × 11.00(H)	mm
Character Size	3.00(W) × 5.02(H)	mm
Dot Size	0.54×0.52	mm
Dot Pitch	0.64 × 0.62	mm
Net Weight	35.0 ± 15% grams (typical)	g


2.3 Electrical Specification

ITEM	STANDARD VALUE	UNIT
IC Package	COB	--
Controller	RW1063	--
Interface	IIC Interface	--

2.4 Optical Specification

ITEM	STANDARD VALUE	UNIT
LCD Type	Refer to 1.1 SLC1602P Series Table	--
Backlight Color	Refer to 1.1 SLC1602P Series Table	--
Viewing Direction	6:00	Clock
LCD Duty	1/16	Duty
LCD Bias	1/5	Bias

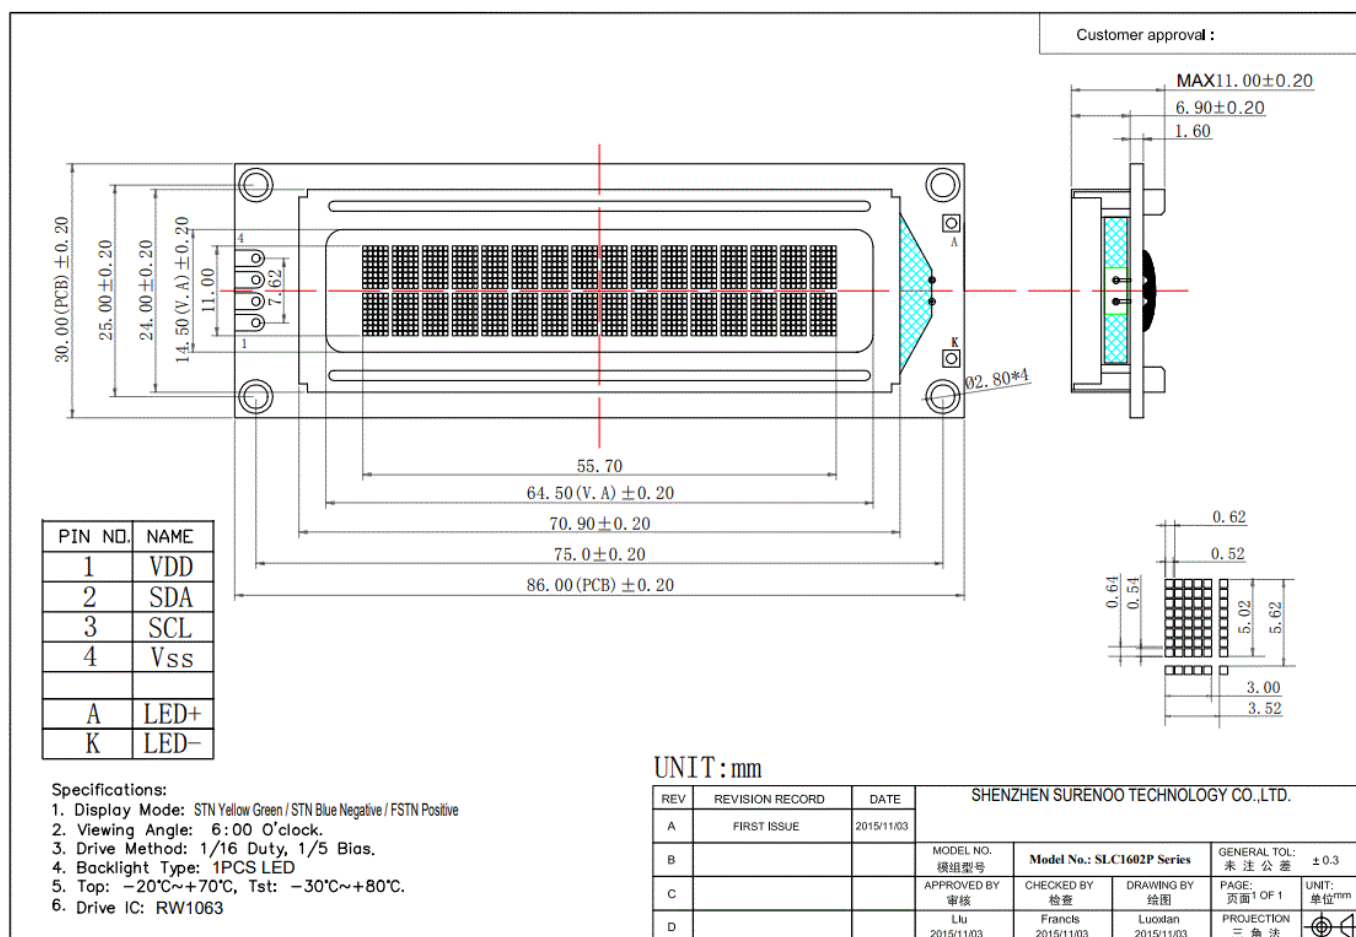OUTLINE DRAWING



ELECTRICAL SPECIFICATIONS

Pin Configuration (5.0V)

Pin	Symbol	Level	Function
1	VDD	- -	Supply Voltage for Logic
2	SDA	H/L	Serial Input Data
3	SCL	H/L	Serial Cclock Input
4	Vss	- -	GND(0V)
A	LED+	- -	LED Backlight Power Supply
K	LED-	- -	

4.2 Absolute Maximum Ratings

Item	Symbol	Min.	Max.	Unit
Supply voltage (Logic)	VDD	4.5	5.5	V
Supply voltage (LCD)	VDD-5	VDD	VDD+0.3	V
Input voltage	V _{in}	-0.3	VDD+0.3	V
Operating Temp	T _a	-20	70	°C
Storage Temp	T _{sto}	-30	80	°C


4.3 Electrical Characteristics (VDD=5V ± 0.25V)

Item	Symbol	Text Condition	Min.	Typ	Max.	Unit
Input High Voltage	V _{IH}	- -	2.5	- -	VDD	V
Input Low Voltage	V _{IL}	- -	-0.3	- -	0.6	V
Output High Voltage	V _{OH}	LOH=-40uA	2.4	- -	VDD	V
Output Low Voltage	V _{OL}	IOL=140uA	- -	- -	0.4	V
Supply Current	I _{DD}	- -	- -	0.55	0.8	mA

LED BACKLIGHT SPECIFICATIONS (T_a=25 °C)

LCD Color	Backlight
Yellow Green	LED/Yellow Green/3.1V(<20mA)
Blue	LED/White/3.1V(<20mA)

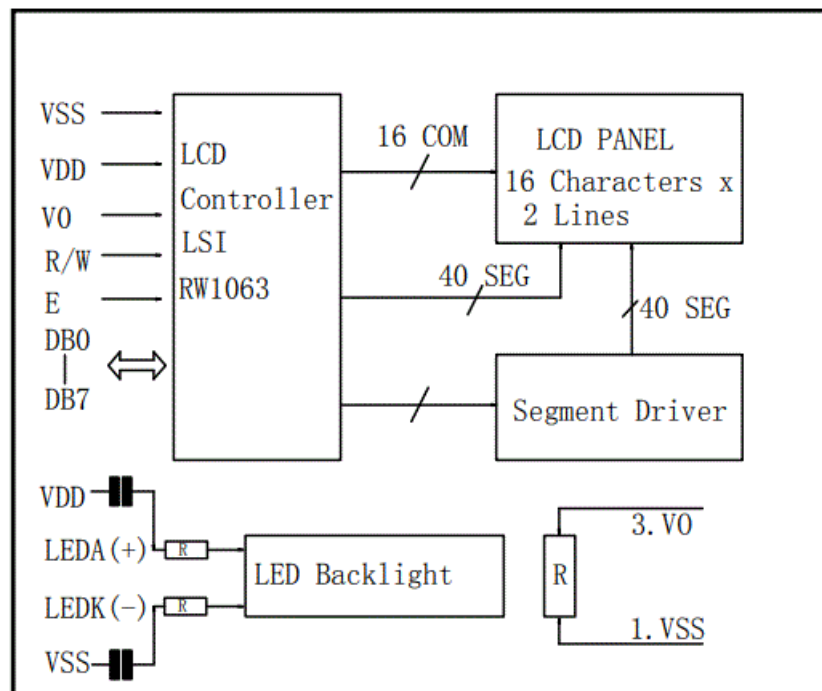BLOCK DIAGRAM



INSPECTION CRITERIA

Acceptable Quality Level: BEach lot should satisfy the quality level defined as follows

PARTITION	AQL	DEFINITION
A. Major	0.4%	Functional defective as product
B. Minor	1.5%	Satisfy all functions as product but not satisfy cosmetic stanard

Definition of Lot

One lot means the delivery quantity to customer at one time.

Condition of Cosmetic Inspection

INSPECTION AND TEST

- FUNCTION TEST
- APPEARANCE INSPECTION
- PACKING SPECIFICATION


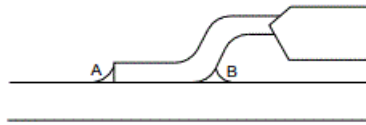

INSPECTION CONDITION

- Put under the lamp (20w/Á2) at a distance 100mm from
- Tilt upright 45 degree by the front (back) to inspect LCD appearance.

AQL INSPECTION LEVEL

- SAMPLING METHOD: MIL-STD-105D
- SAMPLING PLAN: SINGLE
- MAJOR DEFECT: 0.4% (MAJOR)
- MINOR DEFECT: 1.5% (MINOR)
- GENERAL LEVEL: II/NORMAL

Module Cosmetic Criteria



NO.	Item	Judgment Criterion	Partition
1	Difference in Spec.	None allowed	Major
2	Pattern Peeling	No substrate pattern peeling and floating	Major
3	Soldering defects	No soldering missing	Major
		No soldering bridge	Major
		No cold soldering	Minor
4	Resist flaw on substrate	Invisible copper foil(\varnothing 0.5mm or more)on substrate pattern	Minor
5	Accretion of metallic Foreign matter	No soldering dust	Minor
		No accretion of metallic foreign matters(Not exceed \varnothing 0.2mm)	
6	Stain	No stain to spoil cosmetic badly	Minor
7	Plate discoloring	No plate fading,rusting and discoloring	Minor
8	Solder amount 1.Lead parts	<p>a. Soldering side of PCB</p> <p>Solder to form a 'Filet' all around the lead. Solder should not hide the lead form perfectly.(too much)</p> <p>b.Components side (In case of 'Through Hole PCB')</p> <p>Solder to reach the Components side of PCB</p> 	Minor
	2.Flat packages	<p>Either 'toe'(A) or 'heel' (B) of the lead to be covered by 'Filet'</p> <p>Lead form to be assume over Solder.</p> 	Minor
	3.Chips	<p>$(3/2) H \geq h \geq (1/2)H$</p> 	Minor

9	Backlight defects	1.Light fails or flickers.(Major) 2. Color and luminance do not correspond to specifications. (Major) 3.Exceeds standards for display's blemishes, foreign matter, dark lines or scratches.(Minor)	See list ←
10	PCB defects	Oxidation or contamination on connectors.* 2. Wrong parts, missing parts, or parts not in specification.* 3.Jumpers set incorrectly.(Minor) 4.Solder(if any)on bezel,LED pad,zebra pad,or screw hole pad is not smooth.(Minor) *Minor if display functions correctly.Major if the display fails.	See list ←
11	Soldering defects	1. Unmelted solder paste. 2. Cold solder joints,missing solder connections,or oxidation.* 3. Solder bridges causing short circuits.* 4. Residue or solder balls. 5. Solder flux is black or brown. *Minor if display functions correctly.Major if the display fails.	Minor

Screen Cosmetic Criteria (Non-Operating)



No.	Defect	Judgment Criterion	Partition
1	Spots	In accordance with Screen Cosmetic Criteria (Operating) No.1.	Minor
2	Lines	In accordance with Screen Cosmetic Criteria (Operation) No.2.	Minor
3	Bubbles in Polarizer		Minor
		Size: d mm	
		Acceptable Qty in active area	
		d ≤ 0.3 0.3 < d ≤ 1.0 1.0 < d ≤ 1.5 1.5 < d	
		Disregard 3 1 0	
4	Scratch	In accordance with spots and lines operating cosmetic criteria, When the light reflects on the panel surface, the scratches are not to be remarkable.	Minor
5	Allowable density	Above defects should be separated more than 30mm each other.	Minor
6	Coloration	Not to be noticeable coloration in the viewing area of the LCD panels. Back-lit type should be judged with back-lit on state only.	Minor
7	Contamination	Not to be noticeable.	Minor

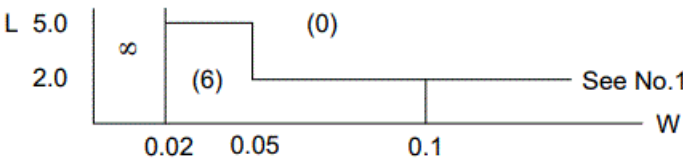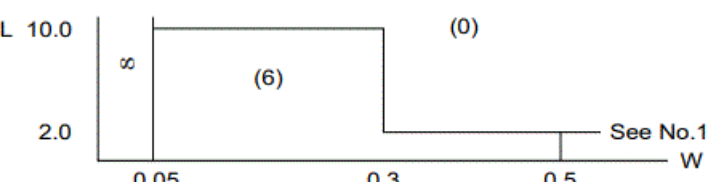Screen Cosmetic Criteria (Operating)

No.	Defect	Judgment Criterion		Partition
1	Spots	A) Clear		Minor
		Size:d mm	Acceptable Qty in active area	
		$d \leq 0.1$	Disregard	
		$0.1 < d \leq 0.2$	6	
		$0.2 < d \leq 0.3$	2	
		$0.3 < d$	0	
		Note: Including pin holes and defective dots which must be within one pixel Size.		
		B) Unclear		
		Size:d mm	Acceptable Qty in active area	
		$d \leq 0.2$	Disregard	
$0.2 < d \leq 0.5$	6			
$0.5 < d \leq 0.7$	2			
$0.7 < d$	0			
2	Lines	A) Clear		Minor
		 <p>Note: () – Acceptable Qty in active area L - Length (mm) W -Width(mm) ∞-Disregard</p>		
B) Unclear				

‘Clear’ = The shade and size are not changed by Vo.

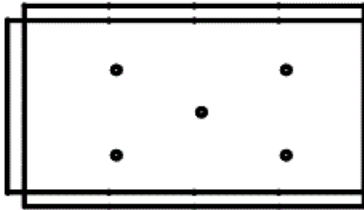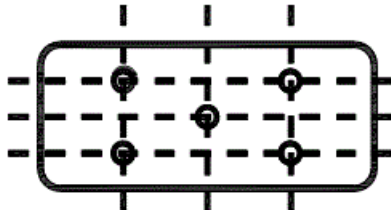‘Unclear’ = The shade and size are changed by Vo.

No.	Defect	Judgment Criterion	Partition
3	Rubbing line	Not to be noticeable.	
4	Allowable density	Above defects should be separated more than 10mm each other.	Minor
5	Rainbow	Not to be noticeable.	Minor
6	Dot size	To be 95%~105%of the dot size (Typ.) in drawing.	Minor
		Partial defects of each dot (ex.pin-hole) should be treated as'spot'. (see Screen Cosmetic Criteria (Operating) No.1)	
7	Brightness (only back-lit Module)	<p>Brightness Uniformity must be $B_{MAX}/B_{MIN} \leq 2$</p> <p>- B_{MAX} :Max.value by measure in 5 points</p> <p>- B_{MIN} : Min.value by measure in 5 points</p> <p>Divide active area into 4 vertically and horizontally.</p> <p>Measure 5 points shown in the following figure.</p> 	Minor
8	Contrast Uniformity	<p>Contrast Uniformity must be $B_{MAX}/B_{MIN} \leq 2$</p> <p>Measure 5 points shown in the following figure.</p> <p>Dashed lines divide active area into 4 vertically and horizontally.</p> <p>Measuring points are located at the inter-sections of dashed line.</p>  <p>Note: B_{MAX} – Max.value by measure in 5 points. B_{MIN} – Min.value by measure in 5 points. O – Measuring points in $\varnothing 10\text{mm}$.</p>	Minor
<p>Note:</p> <p>(1) Size : $d=(\text{long length} + \text{short length})/2$</p> <p>(2) The limit samples for each item have priority.</p> <p>(3) Complexed defects are defined item by item, but if the number of defects is defined in above table, the total number should not exceed 10.</p>			

Note:

- Size : $d=(\text{long length} + \text{short length})/2$
- The limit samples for each item have priority.
- Complexed defects are defined item by item, but if the number of defects is defined in above table, the total number should not exceed 10.
- (4) In case of 'concentration', even the spots or the lines of 'disregarded' size should not be allowed. Following three situations Should be treated as 'concentration'.
 - 7 or over defects in circle of 5mm.
 - 10 or over defects in circle of 10mm
 - 20 or over defects in circle of 20mm

PRECAUTIONS FOR USING

Handling Precautions

- This device is susceptible to Electro-Static Discharge (ESD) damage. Observe Anti-Static precautions.
- SUR display panel is made of glass. Do not subject it to a mechanical shock by dropping it or impact.
- If SUR display panel is damaged and the liquid crystal substance leaks out, be sure not to get any in your mouth. If the substance contacts your skin or clothes, wash it off using soap and water.
- Do not apply excessive force to the SUR display surface or the adjoining areas since this may cause the color tone to vary.
- The polarizer covering the SUR display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.
- If SUR display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten cloth with one of the following Isopropyl or alcohol.
- Solvents other than those above-mentioned may damage the polarizer. Especially, do not use the Water.
- Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.
- Install the LCD Module by using the mounting holes. When mounting the LCD module make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the cable or the backlight cable.
- Do not attempt to disassemble or process LCD module.
- NC terminal should be open. Do not connect anything.
- If the logic circuit power is off, do not apply the input signals.
- To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
 - Be sure to ground the body when handling LCD modules.
 - Tools required for assembling, such as soldering irons, must be properly grounded.
 - To reduce the amount of static electricity generated, do not conduct assembling and other work under dry conditions.
 - The LCD module is coated with a film to protect the SUR display surface. Exercise care when peeling off this protective film since static electricity may be generated.

Power Supply Precautions

- Identify and, at all times, observe absolute maximum ratings for both logic and LC drivers. Note that there is some variance between models.
- Prevent the application of reverse polarity to VDD and VSS, however briefly.
- Use a clean power source free from transients. Power-up conditions are occasionally jolting and may exceed the maximum ratings of SUR modules.
- The VDD power of SUR module should also supply the power to all devices that may access the display. Don't allow the data bus to be driven when the logic supply to the SUR module is turned off.

Operating Precautions

- DO NOT plug or unplug SUR module when the system is powered up.

- Minimize the cable length between SUR module and host MPU.
- For models with backlights, do not disable the backlight by interrupting the HV line. Unload inverters produce voltage extremes that may arc within a cable or at the display.
- Operate SUR module within the limits of the modules temperature specifications.

Mechanical/Environmental Precautions

- Improper soldering is the major cause of SUR module difficulty. Use of flux cleaner is not recommended they may seep under the electrometric connection and cause display failure.
- Mount SUR module so that it is free from torque and mechanical stress.
- Surface of the LCD panel should not be touched or scratched. The display front surface is an easily scratched, plastic polarizer. Avoid contact and clean only when necessary with soft, absorbent cotton dampened with petroleum benzene.
- Always employ anti-static procedure while handling SUR module.
- Prevent moisture build-up upon the SUR module and observe the environmental constraints for storage tem
- Do not store in direct sunlight
- If leakage of the liquid crystal material should occur, avoid contact with this material, particularly ingestion. If the body or clothing becomes contaminated by the liquid crystal material, wash thoroughly with water and soap

Storage Precautions

- When storing the LCD SUR modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.
- Keep SUR modules in bags (avoid high temperature / high humidity and low temperatures below 0C
- Whenever possible, LCD SUR modules should be stored in the same conditions in which they were shipped from our company.

Others

Liquid crystals solidify under low temperature (below the storage temperature range) leading to defective orientation or the generation of air bubbles (black or white). Air bubbles may also be generated if the SUR module is subject to a low temperature. If LCD SUR modules have been operating for a long time showing the same display patterns, the display patterns may remain on the screen as ghost images and a slight contrast irregularity may also appear. A normal operating status can be regained by suspending use for some time. It should be noted that

this phenomenon does not adversely affect performance reliability.

To minimize the performance degradation of the LCD modules resulting from destruction caused by static electricity etc., exercise care to avoid holding the following sections when handling the modules.

- xposed area of the printed circuit board.
- erminal electrode sections.

USING LCD MODULES

Liquid Crystal Display Modules

LCD is composed of glass and polarizer. Pay attention to the following items when handling.

- Please keep the temperature within specified range for use and storage. Polarization degradation, bubble generation or polarizer peel-off may occur with high temperature and high humidity.

- Do not touch, push or rub the exposed polarizers with anything harder than an HB pencil lead (glass, tweezers, etc.).
- N-hexane is recommended for cleaning the adhesives used to attach front/rear polarizers and reflectors made of organic substances which will be damaged by chemicals such as acetone, toluene, ethanol and isopropylalcohol.
- When display surface becomes dusty, wipe gently with absorbent cotton or other soft material like chamois soaked in petroleum benzine. Do not scrub hard to avoid damaging the display surface.
- Wipe off saliva or water drops immediately, contact with water over a long period of time may cause deformation or color fading.
- Avoid contacting oil and fats.
- Condensation on the surface and contact with terminals due to cold will damage, stain or dirty the polarizers. After products are tested at low temperature they must be warmed up in a container before coming in contact with room temperature air.
- Do not put or attach anything on display area to avoid leaving marks on.
- Do not touch the display with bare hands. This will stain the display area and degrade insulation terminals (some cosmetics are determined to the polarizers).
- As glass is fragile. It tends to become or chipped during handling especially on the edges. Please avoid dropping or jarring.

Installing LCD Modules

- Cover the surface with a transparent protective plate to protect the polarizer and LC cell.
- When assembling the LCM into other equipment, the spacer to the bit between the LCM and the fitting plate should have enough height to avoid causing stress to the module surface, refer to the individual specifications for measurements. The measurement tolerance should be $\pm 0.1\text{mm}$.

Precaution for Handling LCD Modules

LCM has been assembled and adjusted with a high degree of precision; avoid applying excessive shocks to the module or making any alterations or modifications to it.

- Do not alter, modify or change the shape of the tab on the metal frame.
- Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.
- Do not damage or modify the pattern writing on the printed circuit board.
- Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector.
- Except for soldering the interface, do not make any alterations or modifications with a soldering iron.
- Do not drop, bend or twist LCM.

Electro-Static Discharge Control

this module uses a CMOS LSI, the same careful attention should be paid to electrostatic discharge as for an ordinary CMOS IC.

- Make certain that you are grounded when handling LCM.
- Before remove LCM from its packing case or incorporating it into a set, be sure the module and your body have the same electric potential.

- When soldering the terminal of LCM, make certain the AC power source for the soldering iron does not leak.
- When using an electric screwdriver to attach LCM, the screwdriver should be of ground potentiality to minimize as much as possible any transmission of electromagnetic waves produced sparks coming from the commutator of the motor.
- As far as possible make the electric potential of your work clothes and that of the work bench the ground potential.
- To reduce the generation of static electricity be careful that the air in the work is not too dried. A relative humidity of 50%-60% is recommended.

Precaution for Soldering to LCM

Observe the following when soldering lead wire, connector cable and etc. to the LCM.

- Soldering iron temperature : $280^{\circ}\text{C} \pm 10^{\circ}\text{C}$
- Soldering time: 3-4 sec.
- Solder: eutectic solder.

soldering flux is used, be sure to remove any remaining flux after finishing to soldering operation. (This does not apply in the case of a non-halogen type of flux.) It is recommended that you protect the LCD surface with a cover during soldering to prevent any damage due to flux spatters.

- When soldering the electroluminescent panel and PC board, the panel and board should not be detached more than three times. This maximum number is determined by the temperature and time conditions mentioned above, though there may be some variance depending on the temperature of the soldering iron.
- When remove the electroluminescent panel from the PC board, be sure the solder has completely melted, the soldered pad on the PC board could be damaged.

Precaution for Operation

- Viewing angle varies with the change of liquid crystal driving voltage (VO). Adjust VO to show the best contrast.
- Driving the LCD in the voltage above the limit shortens its life.
- Response time is greatly delayed at temperature below the operating temperature range. However, this does not mean the LCD will be out of the order. It will recover when it returns to the specified temperature range.
- If display area is pushed hard during operation, the display will become abnormal. However, it will return to normal if it is turned off and then back on.
- Condensation on terminals can cause an electrochemical reaction disrupting the terminal circuit. Therefore, it must be used under the relative condition of 40°C , 50% RH.
- When turning the power on, input each signal after the positive/negative voltage becomes stable.

Limited Warranty

Unless agreed between and customer, will replace or repair any of its LCD modules which are found to be functionally defective when inspected in accordance with LCD acceptance standards (copies available upon request) for a period of one year from date of shipments. Cosmetic/visual defects must be returned to within 90 days of shipment. Confirmation of such date shall be based on freight documents. The warranty liability of limited to repair and/or replacement on the terms set forth above. will not be responsible for any subsequent or consequential events.

Return Policy


No warranty can be granted if the precautions stated above have been disregarded. The typical examples of violations are:

- Broken LCD glass.
- PCB eyelet damaged or modified.
- PCB conductors damaged.
- Circuit modified in any way, including addition of components.
- PCB tampered with by grinding, engraving or painting varnish.
- Soldering to or modifying the bezel in any manner.

Module repairs will be invoiced to the customer upon mutual agreement. Modules must be returned with sufficient description of the failures or defects. Any connectors or cable installed by the customer must be removed completely without damaging the PCB eyelet's, conductors and terminals

www.surenno.com

Documents / Resources

	<p>Surenoo SLC1602P Series LCD Module [pdf] User Manual SLC1602P Series LCD Module, SLC1602P, Series LCD Module, LCD Module, Module</p>
--	---

References

- [S Surenoo Tech: Professional LCD Module Supplier Since 2005](#)