




SVSAUDIOA SoundPath Wireless Audio Adapter Owner's Manual

[Home](#) » [SVS](#) » SVSAUDIOA SoundPath Wireless Audio Adapter Owner's Manual 



SOUND
R | EVOLUTION
SoundPath Wireless
Audio Adapter

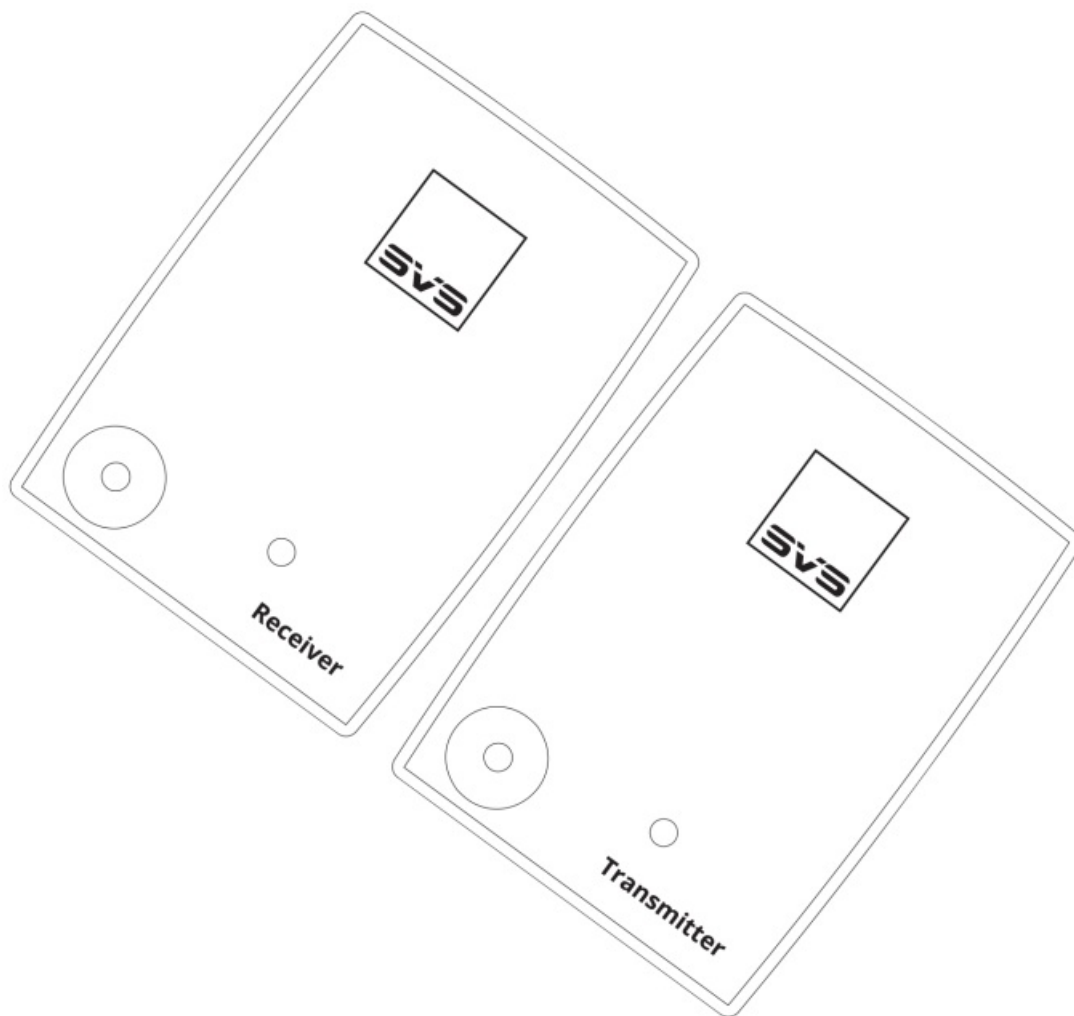

Owner's Manual

SVS SoundPath Wireless Audio Adapter Owner's Manual

Contents

- [1 SVS SoundPath Wireless Audio Adapter](#)
- [2 Specifications & Features](#)
- [3 Connecting the Wireless Transmitter to an AV processor](#)
- [4 Connecting the Wireless Transmitter to a 2-channel stereo pre-amp](#)
- [5 Connecting the Wireless Receiver to your Subwoofer](#)
- [6 Connecting the Wireless Receiver to Power Amplifiers or Powered Speakers](#)
- [7 FAQs and Troubleshooting](#)
- [8 Warranty & Support](#)
- [9 Safety Instructions](#)
- [10 Documents / Resources](#)
- [11 Related Posts](#)

SVS SoundPath Wireless Audio Adapter

Thank you for choosing SVS! The SoundPath Wireless Audio Adapter reduces subwoofer cable clutter without sacrificing performance and unlocks wireless connectivity for powered speakers, amplifiers, and more. Transmit a pristine, full-range audio signal up to 65-feet at CD quality and start enjoying the benefits of wireless audio now. Installation requires only a few simple steps. If you have questions about subwoofer or speaker placement, system optimization, or installing the SVS SoundPath Wireless Audio

Adapter, please contact the SVS Sound Experts tech support 7-days-a-week.

custservice@svsound.com | 877.626.5623 | www.svsound.com

Specifications & Features

Specifications	Receiver
Operating Voltage	5 VDC, 1A
RF Frequency Band	2.404 – 2.476 GHz
Modulation	GFSK
Working Distance	up to 65 feet; line of sight
Transmitter Power	≤ 10 dBm
Receiver Sensitivity	N/A
Frequency Response	5Hz – 24 kHz +/- 1.5 dB
Delay Time	< 14 milliseconds
THD+N (dB)	– 70 dB @ 1 kHz
SNR (db)	+ 85 dB @ 1 kHz

Adapter Includes

- 1 x Wireless Audio Adaptor Kit Transmitter
- 1 x Wireless Audio Adaptor Kit Receiver
- 2 x 3.5 mm to single RCA Interconnect cable (22")
- 2 x 3.5 mm to dual RCA Interconnect cable (22")
- 2 x USB A to Micro B Power Cables (32")
- 2 x 5 VDC Power Supplies with USB A Connectors


What You Will Need

- Subwoofer, powered speakers, or amplifier
- AV receiver, surround processor, or 2-channel pre-amp with a subwoofer pre-out, or L/R line level pre-out

General Placement and Set-up Tips


- Place the subwoofer, powered speakers, or amplifier at its intended location.
- Try to maintain line-of-sight (no walls or solid barriers) between the transmitter and receiver for best results.
- Receiver should be within 65 feet of the transmitter for best results.
- Avoid placing the transmitter next to devices that could create signal interference, such as mobile phones, baby monitors, 2.4 GHz wireless phones, and 2.4 GHz Wi-Fi routers.

Connecting the Wireless Transmitter to an AV processor

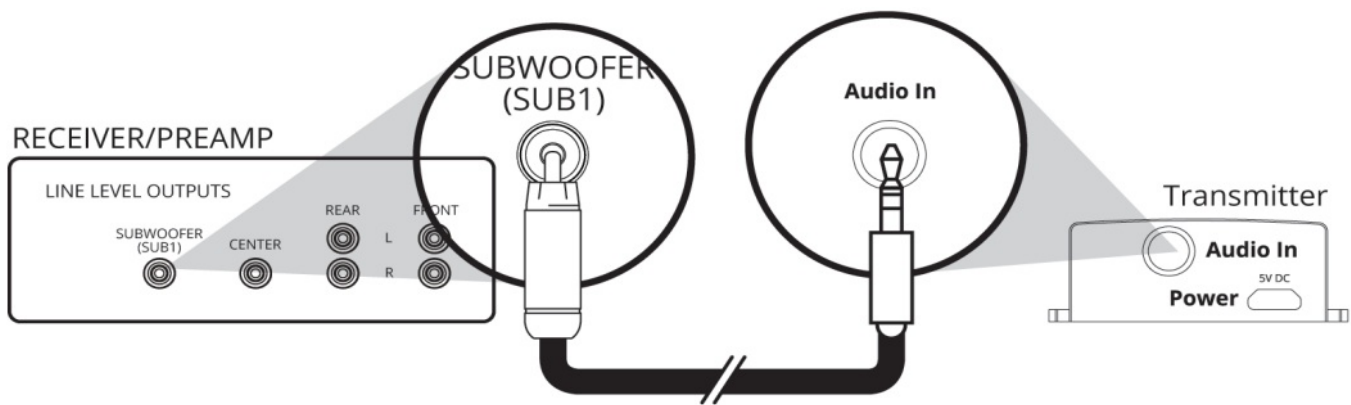


1. Connect the 3.5 mm to single RCA adapter cable to the subwoofer pre-out or LFE channel of the AV processor and to the input on the wireless transmitter.
2. Connect the USB A to Micro B cable to the wireless transmitter and the 5 VDC power supply.
3. Connect the 5VDC power supply to an AC outlet.

Connecting the Wireless Transmitter to a 2-channel stereo pre-amp

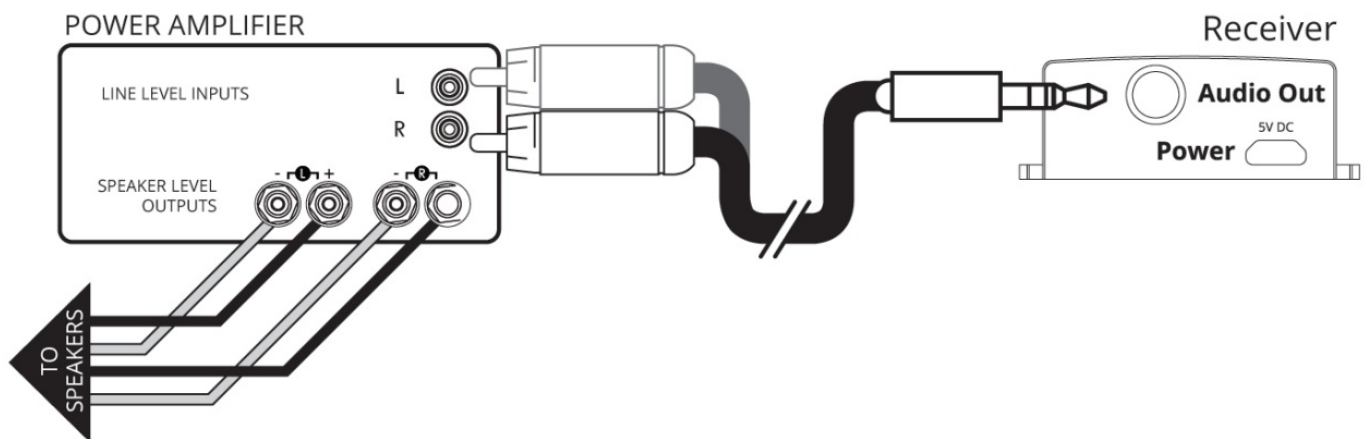


1. Connect the 3.5 mm to dual RCA adapter cable to the L/R line level pre-outs of the 2-channel stereo pre-amp and to the input on the wireless transmitter.
2. Connect the USB A to Micro B cable to the wireless transmitter and the 5 VDC power supply.
3. Connect the 5VDC power supply to an AC outlet.

Connecting the Wireless Receiver to your Subwoofer

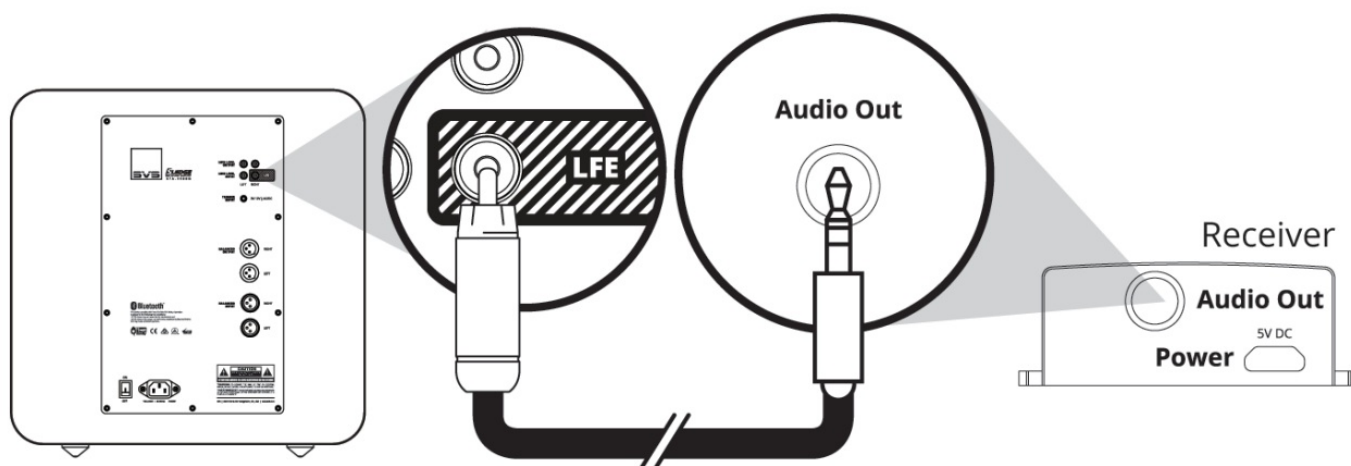


1. For AV processor applications, connect the 3.5 mm to single RCA adapter cable to the LFE input and the input on the wireless receiver.

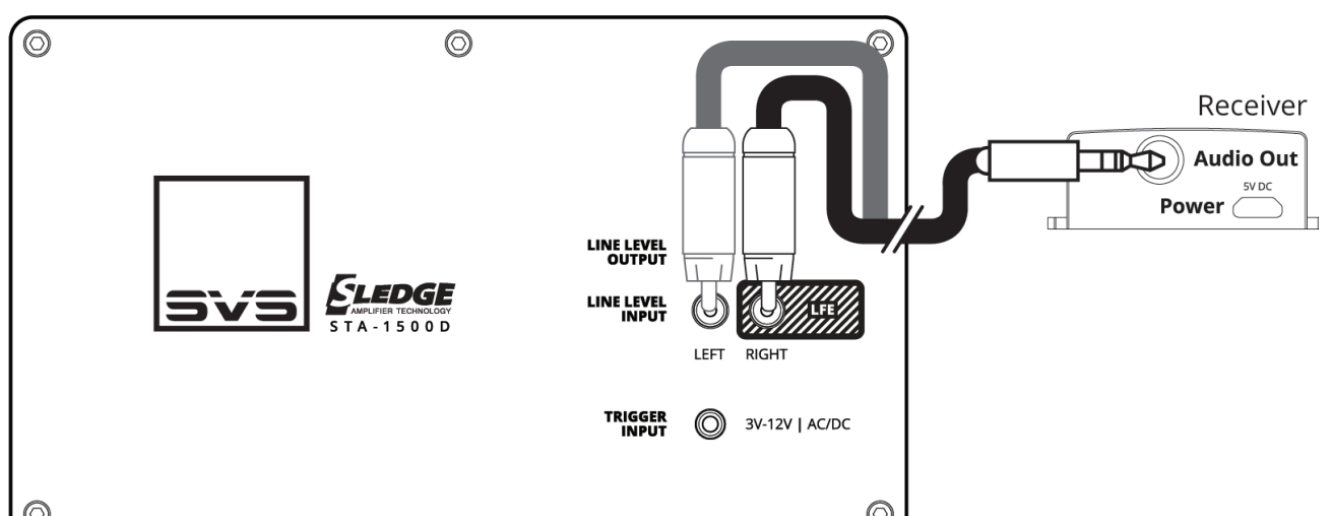

2. For 2-channel stereo pre-amp applications connect the 3.5 mm to dual RCA adapter cable to both the L and R subwoofer inputs and to the input on the wireless receiver.
3. Connect the USB A to Micro B cable to the wireless receiver and the 5 VDC power supply.
4. Connect the 5VDC power supply to an AC outlet.

Connecting the Wireless Receiver to Power Amplifiers or Powered Speakers

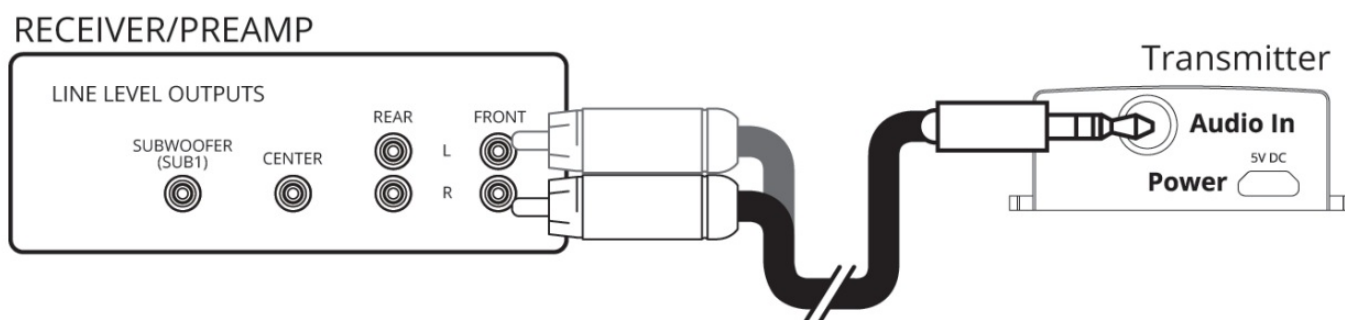

1. For 2-channel applications connect the 3.5 mm to dual RCA adapter cable to both L and R RCA inputs on the stereo amplifier or powered speakers and to the 3.5mm output on the wireless receiver.
2. Connect the USB A to Micro B cable to the wireless receiver and the 5 VDC power supply.

3. Connect the 5VDC power supply to an AC outlet.

Pairing the Transmitter and Receiver

1. The transmitter and receiver are synched at the time of manufacture and will pair automatically when connected and powered on.
2. Successful pairing will be indicated by a steady blue light on the transmitter and receiver.
3. A flashing light indicates the units are not paired. To re-pair the units, perform the following actions:
4. Press and hold the small button on one unit (it doesn't matter which one you select) until the blue light starts blinking.
5. Immediately walk over to the other unit and press/hold the small button until the blue light starts blinking.
6. Both will blink a few times then turn solid blue when they are successfully paired.

FAQs and Troubleshooting

Does my AV processor correct for the latency (time delay) of the wireless unit?

Yes, this will be reflected in a longer than normal subwoofer distance, as shown under the set-up section of the AV processor. An additional 14-20 feet (beyond the actual subwoofer distance) is normal.

I keep hearing interference artifacts or experiencing signal drop-outs – how can I correct this?

Always try to keep a line of sight between the transmitter and receiver units with no hard barriers or walls between them.

Avoid placing other 2.4 GHz devices near the units like wireless phones, mobile phones, WiFi routers, baby monitors, etc.

Warranty & Support

- 5-YEAR UNCONDITIONAL WARRANTY
- SVS offers the industry's most comprehensive warranty on all our products. SVS warrants the SoundPath Wireless Audio Adapter and all products to be free from defects in the workmanship for 5 years from the date of purchase.
- This and all the SVS customer Bill of Rights can be viewed online at: www.svsound.com/bill-of-rights.

Share Your Thoughts

SVS Sound Experts are standing by Monday to Friday from 9 AM-9 PM ET, Saturday from 12 PM-6 PM, and Sunday from 12 PM-4 PM to assist you with set-up, optimization, and any questions you have about the SoundPath Wireless Audio Adapter. They can be reached by phone, email, or chat via the options below.

www.svsound.com • custservice@svsound.com • (877) 626-5623

We also invite you to share a review on our website and to join our fun and active social media community where we share reviews, featured systems, interesting audio articles, and more.

www.svsound.com |  Facebook.com/svsound |  Instagram.com/SVS_Sound |  Twitter.com/SVS_Sound

Safety Instructions

- Read these instructions.
- Keep these instructions.
- Heed all warnings.
- Follow all instructions.
- Do not use this apparatus near water.
- Clean only with dry cloth.
- Install in accordance with the manufacturer's instructions.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Do not defeat the safety purpose of any polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two prongs and a third grounding point. The wide blade or the third prong is provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for the replacement of the obsolete outlet.
- Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- Only use attachments/accessories specified by the manufacturer.
- Unplug this apparatus during lightning storms or when unused for long periods of time.
- Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- **WARNING:** To reduce the risk of fire or electric shock, this apparatus should not be exposed to rain or moisture and objects filled with liquids, such as vases, should not be placed on this apparatus.
- To completely disconnect this equipment from the mains, disconnect the power supply cord plug from the receptacle.
- The main plug of the power supply cord shall remain readily operable.



The lightning flash with an arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within a triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.



The equipment is a Class II or double insulated electrical appliance. It has been designed in such a way that it does not require a safe connection to electrical earth.

SVS

(877) 626-5623 | Youngstown, OH, USA | svsound.com



Owner's Manual

[SVS SVSAUDIOA SoundPath Wireless Audio Adapter](#) [pdf] Owner's Manual
SVSAUDIOA SoundPath Wireless Audio Adapter, SVSAUDIOA, SoundPath Wireless Audio Adapter