

SYSGRATION®

SYSGRATION BSE-18T BLE TPMS Sensor Accessories



SYSGRATION BSE-18T BLE TPMS Sensor Accessories Installation Guide

[Home](#) » [Sysgration](#) » SYSGRATION BSE-18T BLE TPMS Sensor Accessories Installation Guide 

Contents

- [1 SYSGRATION BSE-18T BLE TPMS Sensor Accessories](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Installation](#)
- [5 FCC Statement](#)
- [6 Frequently Asked Questions \(FAQ\)](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

SYSGRATION®

SYSGRATION BSE-18T BLE TPMS Sensor Accessories



Product Information

Specifications

- **Model No.:** BSE-18T
- **Regulatory Compliance:** Industry Canada, FCC
- **Operating Distance:** Minimum 20cm between the radiator and the body

Product Usage Instructions

Regulatory Compliance

This device complies with Industry Canada and FCC regulations. Ensure the device is operated as per the provided guidelines to maintain compliance.

Antenna Installation

The antennas must be installed with at least 20cm separation distance from all persons. Do not co-locate or operate them in conjunction with other antennas or transmitters.

Interference Handling

If interference is experienced, ensure that the device is not causing harmful interference and is able to accept any interference received.

Maintenance


Regularly check the device for any changes or modifications that are not approved. Use shielded interface cables when connecting to computers or peripheral devices to maintain compliance.

Installation

When installing the device, make sure there is a minimum distance of 20cm between the radiator and your body to adhere to radiation exposure limits.

Accessories

BLE TPMS Sensor Accessories

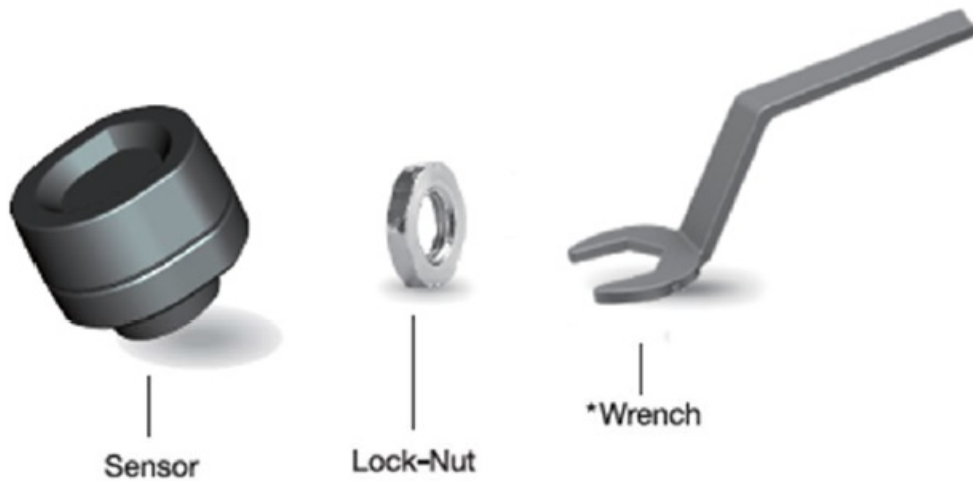

This wrench is recommended to be stored inside the vehicle to avoid loss.

Installation Steps

step 1

Lock the lock-nut the root of the valve thread.




Step 2

Lock sensor into valve, during lock-in process, you will hear the tire pressure leakage sound. Lock the sensor until no hearing tire pressure leakage sound to make sure sensor tightly locked.



Step 3

Apply soap water on valve stem nut to check whether produce bubble and air leakage. No bubbling means correct installation. In case there is bubbling, please re-install according to the procedure.

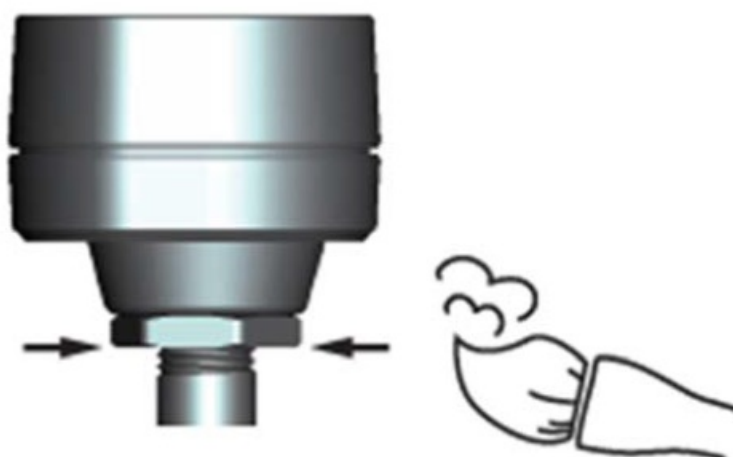

Industry Canada Statement

This device complies with Industry Canada licence-exempt RSS standard.

IC Radiation Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limit set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

FCC Statement

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on,

the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

- This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.
- This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
- The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Frequently Asked Questions (FAQ)

- **What should I do if I experience interference?**
 - If you experience interference, ensure that the device is not causing harmful interference and can accept any interference received.
- **Can I install the antennas closer than 20cm to a person?**
 - No, the antennas must be installed to provide a separation distance of at least 20cm from all persons to comply with regulations.
- **What happens if I do not follow the installation guidelines?**
 - Failure to follow the installation guidelines may result in non-compliance with regulatory standards and could affect the device's performance.

Documents / Resources

	<p>SYSGRATION BSE-18T BLE TPMS Sensor Accessories [pdf] Installation Guide BSE-18T, HQXBSE18T, BSE-18T BLE TPMS Sensor Accessories, BSE-18T BLE, TPMS Sensor Accessories, Accessories</p>
---	---

References

- [User Manual](#)

Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.