



TASCAM DR-22WL Handheld Recorder with Wifi Functionality User Manual

[Home](#) » [TASCAM](#) » TASCAM DR-22WL Handheld Recorder with Wifi Functionality User Manual 

Contents

- 1 [TASCAM DR-22WL Handheld Recorder with Wifi Functionality](#)
- 2 [Remote Wi-Fi operation eliminates handling noise](#)
- 3 [Built-in X-Y cardioid stereo mics enable high-quality audio recording](#)
- 4 [Large LCD and scene dial make the interface simple and easy to understand](#)
- 5 [Overdubbing and reverb can be used](#)
- 6 [Smartphone can be used with unit to send recorded files](#)
- 7 [Multiple automatic features allow simplified operation](#)
- 8 [Other convenient features](#)
- 9 [Features at a glance](#)
- 10 [Supported Operating Systems](#)
- 11 [Options](#)
- 12 [Related products](#)
- 13 [Specifications](#)
- 14 [Documents / Resources](#)
 - 14.1 [References](#)
- 15 [Related Posts](#)

TASCAM

TASCAM DR-22WL Handheld Recorder with Wifi Functionality



Remote Wi-Fi operation eliminates handling noise

TASCAM has once again revolutionized handheld recording! The DR-22WL creates its own Wi-Fi network, and a free dedicated app can be used for remote operation without touching the unit. Since the Wi-Fi transmission range is about 20m/65 feet, this feature can be used with the recorder in places that are normally out of reach. Not only does the app allow recording to be started and stopped, it can also be used to check and adjust input levels from an iOS or Android device. Everything related to recording can be done by Wi-Fi.

In addition, audio can be checked by Wi-Fi after recording. The audio quality can be checked through headphones connected to a smartphone. With operation capabilities and flexibility that exceeds infrared remotes – and reliability that approaches that of wired remotes – this hand held recorder allows freedom of placement that far surpasses that of previous models.

Starting with firmware version 2.0 it is also possible to connect via an existing router or access point. Advantages are that (1) you can use other web services like e-mail or sharing portals at the same time with your mobile device, and (2) Wi-Fi range thus control range might be larger, depending on the router capabilities. A direct connection, in contrast, is ideal when there is no WiFi available or you don't have permission to use it.

Note: Checking audio via Wi-Fi is intended for use after recording.

- Choose which type of Wi-Fi connection to use: Simple direct connection (no router necessary) or connection via an existing Wi-Fi network (local router or access point)
- Remote control using the free DR CONTROL app (iOS/Android)
- Check recorded audio using wireless playback



Built-in X-Y cardioid stereo mics enable high-quality audio recording



Two unidirectional mic units are utilized together for stereo recording in an X-Y format. They are arranged so that their diaphragms overlap in the same axis. X-Y format recording can capture sound with a good stereo image and no sense of emptiness at the center. Since the mic units will not distort even at high volumes, recording with a great sense of nearness is possible even in high-volume situations.

In addition, a shock mount structure is used to hold the mic capsules. This absorbs vibrations effectively even when mounted on a digital SLR camera.

- Cardioid condenser mics in an X-Y configuration for impeccable stereo recordings
- Designed to handle high sound pressures of up to 120 dB
- Low noise realized through the use of high-performance audio codec

Large LCD and scene dial make the interface simple and easy to understand



Two unidirectional mic units are utilized together for stereo recording in an X-Y format. They are arranged so that their diaphragms overlap in the same axis. X-Y format recording can capture sound with a good stereo image and no sense of emptiness at the center. Since the mic units will not distort even at high volumes, recording with a great sense of nearness is possible even in high-volume situations.

In addition, a shock mount structure is used to hold the mic capsules. This absorbs vibrations effectively even when mounted on a digital SLR camera.

- Scene dial allows instant recall of settings suitable for different scenes
- Large 128×128 LCD and 4 function keys enable simple operation
- Input level adjustment dial designed for usability

Overdubbing and reverb can be used



In addition to recording, this unit also has functions that can be used for music creation. The overdubbing function allows new sounds to be layered over existing recordings. This can be used to add solo parts to karaoke and to create harmonies by recording the same instrument multiple times. By using the reverb effect, users can create sounds that are even more appealing using just the DR-22WL.

Smartphone can be used with unit to send recorded files

The benefits of Wi-Fi are not limited to recording. Audio files can be transmitted via Wi-Fi to smartphones and computers. They can also be uploaded to SoundCloud using a dedicated application. SoundCloud is tightly linked with other social networking services. For example, if a recording is shared to Facebook, it will appear on the user's timeline. By uploading a live recording immediately after performance, audience members could listen to the concert again on their way home.

Note: An Internet connection is necessary to upload files to the Internet from a smartphone.

- Dual-format recording function allows simultaneous recording of both WAV and MP3 files
- Share audio files from SoundCloud to other social networking services
- Transfer files to computers wirelessly

Multiple automatic features allow simplified operation

Even though the DR-22WL is a professional recording device, it also has numerous automatic functions that make capturing high-quality recordings easy for anyone. In addition to automatic recording functions, the unit also has functions that simplify file management. Users can create high-quality recordings without complicated operations.

- Automatic level optimization functions (peak reduction and limiter)
- Automatic track incrementation functions (new file creation) can be set according to the application
- Automatic recording function that starts recording when a preset audio input level is detected
- Automatic mark function that adds marks according to set conditions
- Automatic division function that divides files at pre set marks (V1.10)

Over-level peaks can be marked automatically

The new Peak Mark function automatically places a mark two seconds before a detected peak (PEAK LED) during recording, which is useful for post-recording confirmation. When there are no problems found after confirmation, the mark can be deleted. In the BWF format (in the same way as with other types of marks) the peak mark can be utilized in corresponding DAWs. To avoid multiple marks for the same overload event, new marks are only set 10 seconds after the previous peak mark.



Other convenient features

Recording settings and GPS information can be saved with BWF files

A major improvement since firmware version 1.2 is the XRI (extended Recording Information) feature that can be used with BWF format recordings. It stores the recording settings after each recording and allows the user to identify the recorder as well as the settings used for a certain recording. In addition, a smartphone's GPS information can be embedded while connected to the recorder via Wi-Fi and using the DR CONTROL app. Storing GPS data is useful when working in multiple locations, e.g. when making outdoor sound-gathering recordings. XRI information can be displayed on the main unit, on the DR CONTROL app or on other XRI-compatible models and applications.

Protection for important files

The new Protect function prevents important recorded files from being mistakenly deleted by operating the main unit. Protection can be switched on or off for each recording file individually.



Features at a glance

Key features

- Supported WAV recording formats: 44.1/48/96 kHz, 16/24 bits, WAV/BWF format
- Supported MP3 recording format: 44.1/48 kHz, 32-320 kbps MP3
- Scene dial for instant setup of common recording applications
- Wi-Fi connection supports monitoring, transport control, level control, file transfer and more
- Easy Wi-Fi direct connection with Android/iOS or through an existing router or access point
- Dedicated Wi-Fi file transfer application for Windows/Mac available

Recording hardware

- Unidirectional (cardioid) condenser microphones in X-Y configuration
- Can handle high sound pressure levels up to 120 dB SPL
- Improved microphone preamps for higher-quality audio
- Cirrus Logic AD/DA codec for low-noise, high-performance audio recording and low power consumption

- Recording media: SD/SDHC/SDXC card (up to 128GB SDXC card)

Recording functions

- Dual format recording function (WAV and MP3)
- Four-position low-cut filter (40/80/120/220 Hz)
- Peak-reduction function automatically sets the optimal level when peaks are detected in music recordings
- Limiter for overload protection
- Auto-recording function to automatically start recording based on input level
- Pre-recording function that can record up to 2 seconds prior to actual record start
- Self-timer recording function
- Mark function (manual or automatic by peak or by time)
- Information on the recording settings used and the current GPS position derived from a connected smartphone can be embedded in BWF files

Playback functions

- Variable Speed Audition (VSA) is ideal for practice and arrangement (50-150% change of speed)
- Key changing function with fine-tuning (± 6 halftones)
- 1-0 loop playback function – ideal for rehearsal
- Resume function retains the last stop position when power is turned back on
- Audio files created on computer can be played back (only in formats compatible with this product)

Editing functions

- Divide function (manual or automatic by markers)
- Track division function creates new files during recording (manual or automatic by time or by level)
- Files and empty folders can be deleted
- Reverb effect for acoustic instruments and vocals
- Automatic power-saving function that prevents unnecessary use of battery power
- Metronome for rehearsal
- File name format can be set to use a user-defined word or date
- Long-time operation of over 17 hours using the internal batteries
- Stereo-mini headphones/line output with 20 mW output power per channel
- 128×128 graphic LCD with backlight
- Screw hole for tripod attachment
- USB 2.0 high-speed file transfer to/from computer
- Included accessories: SD card, 2 AA batteries, micro USB cable
- Powered by two AA batteries, optional AC adapter or USB bus power
- Reverb effect for acoustic instruments and vocals
- Automatic power-saving function that prevents unnecessary use of battery power
- Metronome for rehearsal
- File name format can be set to use a user-defined word or date
- Long-time operation of over 17 hours using the internal batteries

- Stereo-mini headphones/line output with 20 mW output power per channel
- 128×128 graphic LCD with backlight
- Screw hole for tripod attachment
- USB 2.0 high-speed file transfer to/from computer
- Included accessories: SD card, 2 AA batteries, micro USB cable
- Powered by two AA batteries, optional AC adapter or USB bus power

Supported Operating Systems

Windows


- Windows 10 (May 2020, version 2004)
- Windows 8.1
- Windows 7

Mac


- macOS Catalina (10.15)
- macOS Mojave (10.14)
- macOS High Sierra (10.13)

Options


AK-DR11: Accessory Pack for DR Series Audio Recorders



DR Control: Remote app for DR-series recorders

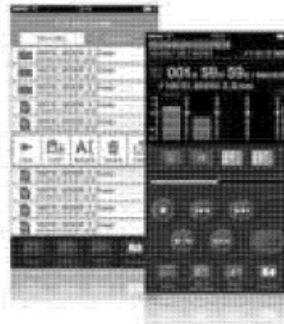

TM-10L: Lavalier Microphone With Screw-Lock Connector

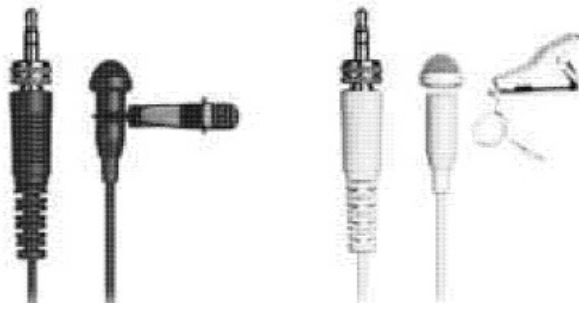

PS-P520U: 5-Volt AC Adapter



Related products

DR-OSX: Stereo Handheld Audio Recorder and USB Audio Interface



DR-07X: Stereo Handheld Audio Recorder and USB Audio Interface



Specifications

General

- Recording media
 - microSD card (64 MB – 2 GB)
 - microSDHC card (4-32 GB)
 - microSDXC card (64-128 GB)

- Recording/playback formats
 - BWF: 44.1k/48k/96kHz, 16/24 bit
 - WAV: 44.1k/48k/96kHz, 16/24 bit
 - MP3: 44.1k/48 kHz, 32/64/96/128/192/256/320 Kbit/s
- Number of channels 2 channels (stereo)

Analogue audio inputs and outputs

- MIC/EXT IN jack (can provide plug-in power)
- Input impedance 3.5-mm stereo mini jack
- Reference input level 25 kΩ
- Maximum input level – 4 dBV
- Phones/LINE OUT jack
- Output impedance 3.5-mm stereo mini jack 12 Ω
- Reference output level -14 dBV (at 10 kΩ load)
- Maximum output level 20 mW + 20 mW (at 32 Ω load)

Approximate battery operation time (continuous operation)

- WAV, 96kHz, 24bit
 - About 9 hours
(Recording with built-in microphone)
- WAV, 44.1kHz, 16bit
 - About 17.5 hours
(Recording with built-in microphone)
- MP3 format, 44.1kHz, 128kbps
 - About 12 hours
(Recording with built-in microphone)
- MP3 format, 48kHz, 320kbps
 - About 11 hours
(Recording with built-in microphone)
- WAV, 96kHz, 24bit
 - About 11 hours
(Playback using headphones)

Documents / Resources



[TASCAM DR-22WL Handheld Recorder with Wifi Functionality](#) [pdf] User Manual
DR-22WL Handheld Recorder with Wifi Functionality, DR-22WL, Handheld Recorder with Wifi F
unctionality, Recorder with Wifi Functionality, Wifi Functionality

References

- [T Tascam AK-DR11 | Accessory Pack for DR Series Audio Recorders](#)
- [T Tascam BP-6AA | Battery pack](#)
- [T Tascam DR Control | Remote app for DR-series recorders](#)
- [T Tascam DR Control | Remote app for DR-series recorders](#)
- [T Tascam DR-05X | Stereo Handheld Audio Recorder and USB Audio Interface](#)
- [T Tascam DR-07X | Stereo Handheld Audio Recorder and USB Audio Interface](#)
- [T Tascam PS-P520U | 5-Volt AC Adapter](#)
- [T Tascam PS-P520U | 5-Volt AC Adapter](#)
- [T Tascam TM-10L | Lavalier Microphone With Screw-Lock Connector](#)
- [T tascam.eu/pics/dr-22wl.jpg](#)