

tc electronic
tc electronic Multi
Monitor Switching
Control Station



tc electronic Multi Monitor Switching Control Station User Guide

[Home](#) » [tc electronic](#) » tc electronic Multi Monitor Switching Control Station User Guide 

Contents

- 1 tc electronic Multi Monitor Switching Control Station
- 2 Product Information
- 3 Usage Instructions
- 4 Important Safety Instructions
- 5 LIMITED WARRANTY
- 6 MONITOR PILOT Controls
- 7 Calibrated Listening
- 8 MONITOR PILOT BLOCK DIAGRAM
- 9 Specifications
- 10 Other important information
- 11 FEDERAL COMMUNICATIONS COMMISSION COMPLIANCE INFORMATION
- 12 Documents / Resources
 - 12.1 References
- 13 Related Posts

tc electronic

tc electronic Multi Monitor Switching Control Station



Product Information

Specifications

- Product Name: MONITOR PILOT
- Model: V 2.0
- Features: Multi-Monitor Switching Control Station with ElegantDesktop Controller and Calibrated Listening

Usage Instructions

Important Safety Instructions

1. Read and follow all instructions and warnings provided.
2. Avoid placing the apparatus near water or in confined spaces.
3. Clean the product only with a dry cloth.
4. Ensure ventilation openings are not blocked during installation.
5. Protect the power cord from damage and do not expose it to heat sources.
6. Use only recommended attachments and accessories.
7. Unplug the device during storms or prolonged periods of non-use.
8. Seek qualified personnel for servicing and repairs.

Installation Instructions

1. Refer to the information on the bottom enclosure for electrical and safety details before installation.
2. Avoid exposing the device to heat sources, water, or obstruction of ventilation.
3. Connect the apparatus to a mains socket outlet with protective earthing terminal.
4. Use specified carts, stands, tripods, brackets, or tables for installation.

Maintenance and Care

1. Regularly clean the device with a dry cloth to prevent dust accumulation.
2. Avoid using liquid cleaners or exposing the product to moisture.
3. Check the power cord for any signs of damage and replace if necessary.

FAQ

- **Q: What should I do if the device is not functioning properly?**

A: If you encounter any issues with the product's functionality, please unplug it and contact qualified personnel for servicing and repairs.

- **Q: Can I use the MONITOR PILOT in outdoor environments?**

A: It is recommended to avoid using the product outdoors unless specified for outdoor use to prevent damage from environmental factors.

MONITOR PILOT

Multi-Monitor Switching Control Station with Elegant Desktop Controller and Calibrated Listening

Important Safety Instructions



CAUTION

RISK OF ELECTRIC SHOCK! DO NOT OPEN!

Terminals marked with this symbol carry electrical current of sufficient magnitude to constitute risk of electric shock. Use only high-quality professional speaker cables with ¼" TS or twist-locking plugs pre-installed. All other installation or modification should be performed only by qualified personnel.



This symbol, wherever it appears, alerts you to the presence of uninsulated dangerous voltage inside the enclosure – voltage that may be sufficient to constitute a risk of shock.



This symbol, wherever it appears, alerts you to important operating and maintenance instructions in the accompanying literature. Please read the manual.

Caution

To reduce the risk of electric shock, do not remove the top cover (or the rear section). No user serviceable parts inside. Refer servicing to qualified personnel.

Caution

To reduce the risk of fire or electric shock, do not expose this appliance to rain and moisture. The apparatus shall not be exposed to dripping or splashing liquids and no objects filled with liquids, such as vases, shall be placed on the apparatus.

Caution

These service instructions are for use by qualified service personnel only. To reduce the risk of electric shock do not perform any servicing other than that contained in the operation instructions. Repairs have to be performed by qualified service personnel.

Warning

Please refer to the information on the exterior of bottom enclosure for electrical and safety information before installing or operating the device.

1. Please read and follow all instructions and warnings.
2. Keep the apparatus away from water (except for outdoor products).
3. Clean only with dry cloth.
4. Do not block ventilation openings. Do not install in a confined space. Install only according to manufacturer's instructions.
5. Protect the power cord from damage, particularly at plugs and appliance socket.
6. Do not install near any heat sources such as radiators, heat registers, stoves or other apparatus (including amplifiers) that produce heat.
7. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with

one wider than the other (only for USA and Canada). A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.

8. Use only attachments and accessories recommended by the manufacturer.



9. Use only specified carts, stands, tripods, brackets, or tables. Use caution to prevent tip-over when moving the cart/apparatus combination.

10. Unplug during storms, or if not in use for a long period.

11. Only use qualified personnel for servicing, especially after damage.

12. The apparatus with protective earthing terminal shall be connected to a MAINS socket outlet with a protective earthing connection.

13. Where the MAINS plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.

14. Avoid installing in confined spaces like bookcases.

15. Do not place naked flame sources, such as lighted candles, on the apparatus.

16. Operating temperature range 5° to 45°C (41° to 113°F).


LEGAL DISCLAIMER

Music Tribe accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. Midas, Klark Teknik, Lab Gruppen, Lake, Tannoy, Turbosound, TC Electronic, TC Helicon, Behringer, Bugera, Aston Microphones and Coolaudio are trademarks or registered trademarks of Music Tribe Global Brands Ltd. © Music Tribe Global Brands Ltd. 2024 All rights reserved.

LIMITED WARRANTY

For the applicable warranty terms and conditions and additional information regarding Music Tribe's Limited Warranty, please see complete details online at community.musictribe.com/support.

MONITOR PILOT Controls

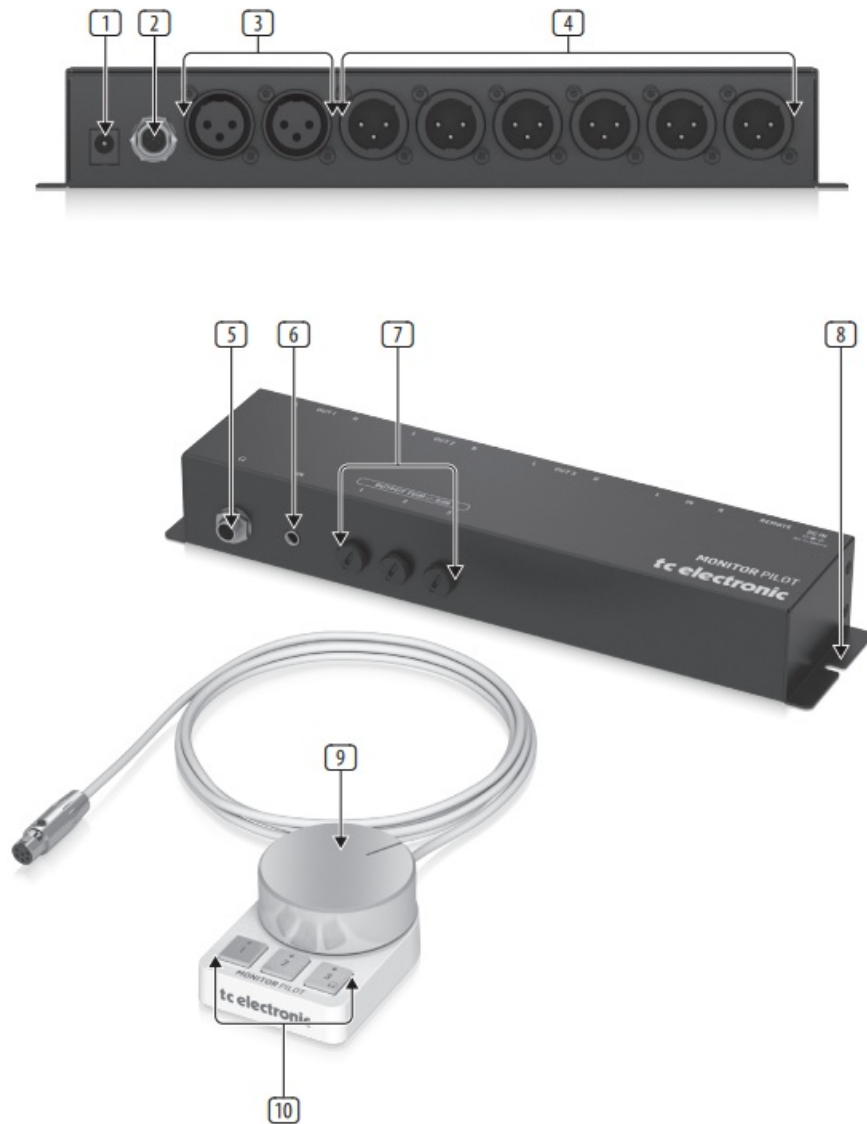

Controls

1. DC IN – Connect the included power cable.
2. REMOTE – Connect the 6-pin remote cable so that the locking tab is properly aligned.
3. MAIN LR INPUTS – Connect the main stereo input signal via balanced XLR cables.
4. MAIN LR OUTPUTS – Connect up to 3 pairs of stereo monitor speakers. Note that engaging Out 3 will also engage the headphone output.
5. HEADPHONE OUT – Connect a pair of headphones via 1/4" TRS cable.
6. AUX IN – Connect a secondary audio input via 1/8" TRS cable.
7. OUTPUT TRIM KNOBS – Compensate for differences in volume between speakers by turning each pot.
8. MOUNTING BRACKETS – Install the I/O housing beneath a desk or on a wall using a pair of screws (not included).
9. LEVEL KNOB – Adjust the overall output level.
10. MONITOR SELECT – Select between the 3 outputs. Note that the 3rd output also activates the headphone out.

Calibrated Listening

Calibrated listening is fundamental, giving you many crucial benefits. Most of them have to do with consistency,

which is absolutely essential when it comes to delivering great-sounding mixes. Your aim should be to ensure that your mix will sound great not just in this room on these speakers for this particular format – but every time, for any delivery format.

Making sure that you mix at the same SPL level on a day-to-day basis is essential because you are likely to mix quite differently at different volume levels. If you calibrate your system, you simply will be able to achieve more consistent mixes.

Calibrated listening ensures...

- Consistency between rooms: Create the same reference level across different mixing studios and editing suites.
- Consistency between sessions: Ensure the same reference level every day of the week.
- Consistency between speaker sets: Mix at the same reference level when you switch between speaker setups and audio formats. Calibration standards: EBU R128, SMPTE RP200, ATSC A85

There are multiple standards available for calibration of your monitor setup. The right one for you depends on what type of mixing you do – music, TV, cinema, web etc.

We suggest you use a measurement microphone or a mobile unit in combination with standard signals in your DAW to ensure that the audio level in your DAW translates to a standardized SPL level in the listening position. Use the +/-9 dB trimmers on Monitor Pilot in combination with the sensitivity selectors on your monitors to find the optimal, equal and calibrated level across your studio monitor sets.

- Note that increased sensitivity on your studio monitors may increase the general noise level.
- The Monitor Pilot as a reference point has 0 dB gain at 3 o'clock setting on the remote controller if the output trimmers are set to max.
- If real calibration seems like a big task, you may simply just use the trimmers to ensure all speaker sets play equally loud.
- Tip: Speaker set 3 and headphones output are shared. In case you don't have a third speaker set, use the trimmer for speaker set 3 to make the levels on your headphones equal to the level on your studio monitors.

General notes


- Monitor Pilot always starts up with speaker set 1 selected
- Only one speaker set can be active at a time
- Even though much effort has been put into ensuring that the Monitor Pilot behaves well in all situations, we suggest you power on your speakers last and power them off first as a daily routine in order to eliminate clicks and pops that may harm your speakers.
- The internal limiter ensures that levels exceeding the maximum of the Monitor Pilot (likely also the maximum of your speakers) is limited. This could happen with hot levels and if the master volume control is set to max (+6 dB gain). The limiter is never active otherwise.
- The main XLR inputs and the auxiliary mini jack input are summed internally in Monitor Pilot.
- We suggest you turn the Monitor Pilot and your speakers off when connecting/disconnecting the system.

The Monitor Pilot main unit is designed to either

- be put away for a tidy cable routing.
- be mounted under your desk at the front end giving easy access to headphones and auxiliary input and trimmers.

- or be placed at the back end of your desk also with easy access to headphones and auxiliary input and trimmers. You may use the supplied rubber feet to ensure table grip.

MONITOR PILOT BLOCK DIAGRAM

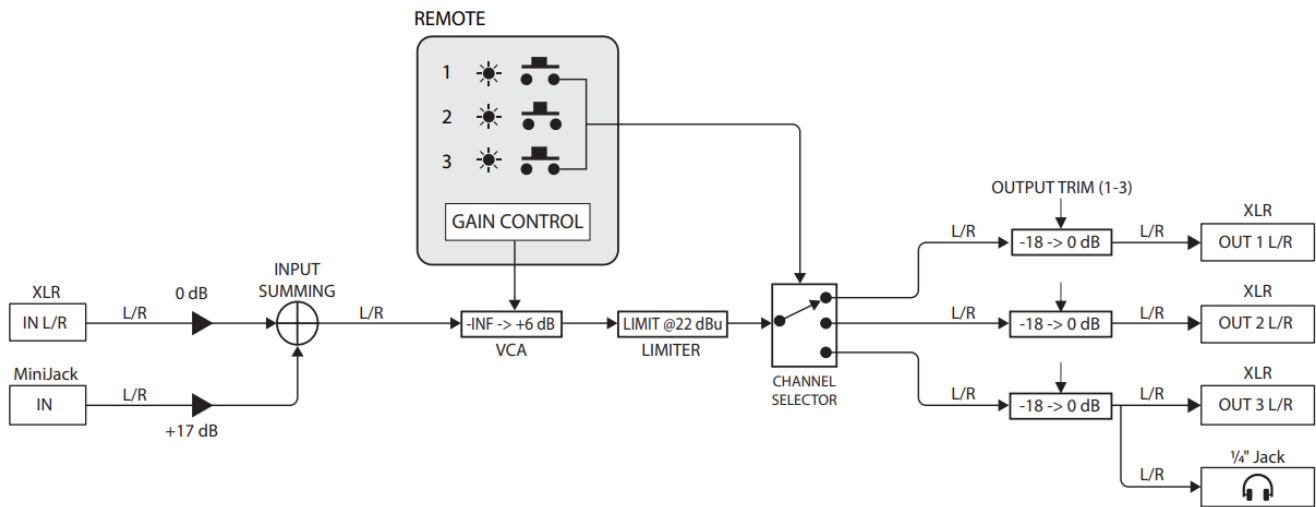

Specifications

Analog Inputs	
Main input	2 x XLR, balanced
Input impedance	10 k Ω balanced, 5 k Ω unbalanced
Max input level	+22 dBu
Aux input	1/8" TRS, stereo unbalanced
Input impedance	500 Ω
Max input level	+5 dBu
Analog Outputs	
Monitor out 1-3	2 x XLR, balanced
Output impedance	100 Ω balanced, 50 Ω unbalanced
Max output level	+22 dBu
Phones	1/4" TRS, stereo
Output impedance	50 Ω
Max output level	+22 dBu
System (XLR in to XLR out)	
Frequency response	+0/-0.2 dB, 20 Hz to 20 kHz
Dynamic range	> 105 dB, (0 dB gain) unweighted, BW 20 Hz - 20 kHz
Crosstalk	< -90 dB @ 1 kHz
Max gain	+6 dB
Trim gain per output pair	-18 to 0 dB
Power Supply / Voltage	
Mains voltage	100-240 VAC, 50/60 Hz
Power consumption	12 W max
Power supply	12 V DC, 1000 mA (included)
Main Unit Dimensions / Weight	
Dimensions (H x W x D)	39 x 261 x 70 mm (1.5 x 10.3 x 2.8")
Weight	0.6 kg (1.2 lbs)
Finish	Powder coated black steel plate
Remote Dimensions / Weight	
Dimensions (H x W x D)	37 x 53 x 78 mm (1.5 x 2.1 x 3.1")
Weight	0.2 kg (0.4 lbs)
Finish	Aluminum anodized knob, plastic body with metal foot

Other important information

Important information

1. Register online.

Please register your new Music Tribe equipment right after you purchase it by visiting musictribe.com.

Registering your purchase using our simple online form helps us to process your repair claims more quickly and efficiently. Also, read the terms and conditions of our warranty, if applicable.

2. Malfunction.

Should your Music Tribe Authorized Reseller not be located in your vicinity, you may contact the Music Tribe Authorized Fulfiler for your country listed under "Support" at musictribe.com. Should your country not be listed, please check if your problem can be dealt with by our

"Online Support" which may also be found under "Support" at musictribe.com. Alternatively, please submit an online warranty claim at musictribe.com BEFORE returning the product.

3. Power Connections.

Before plugging the unit into a power socket, please make sure you are using the correct mains voltage for your particular model. Faulty fuses must be replaced with fuses of the same type and rating without exception.

FEDERAL COMMUNICATIONS COMMISSION COMPLIANCE INFORMATION

TC Electronic MONITOR PILOT

Responsible Party Name: Music Tribe Commercial NV Inc.

Address: 122 E. 42nd St.1,

8th Floor NY, NY 10168,

United States

Email Address: legal@musictribe.com

MONITOR PILOT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Important information

Changes or modifications to the equipment not expressly approved by Music Tribe can void the user's authority to use the equipment.

Hereby, Music Tribe declares that this product is in compliance with Directive 2014/35/EU, Directive 2014/30/EU, Directive 2011/65/EU and Amendment 2015/863/EU, Directive 2012/19/EU, Regulation 519/2012 REACH SVHC and Directive 1907/2006/EC.

Full text of EU DoC is available at <https://community.musictribe.com/>

EU Representative: Music Tribe Brands DK A/S

Address: Gammel Strand 44, DK-1202 København K, Denmark


UK Representative: Music Tribe Brands UK Ltd.

Address: 8th Floor, 20 Farringdon Street London EC4A 4AB,
United Kingdom







Correct disposal of this product: This symbol indicates that this product must not be disposed of with household waste, according to the WEEE Directive (2012/19/EU) and your national law. This product should be taken to a collection center licensed for the recycling of waste electrical and electronic equipment (EEE). The mishandling of this type of waste could have a possible negative impact on the environment and human health due to potentially hazardous substances that are generally associated with EEE. At the same time, your cooperation in the correct disposal of this product will contribute to the efficient use of natural resources. For more information about where you can take your waste equipment for recycling, please contact your local city office, or your household waste collection service.

Documents / Resources



[tc electronic Multi Monitor Switching Control Station](#) [pdf] User Guide
Multi Monitor Switching Control Station, Monitor Switching Control Station, Switching Control Station, Control Station, Station

References

-  [Behringer | Home](#)
-  [Music Tribe](#)
-  [Music Tribe](#)
-  [Music Tribe](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.