



tc electronic TC2290 NATIVE Legendary Dynamic Delay Plug-In with Optional Hardware Desktop Controller User Guide

Home » tc electronic » tc electronic TC2290 NATIVE Legendary Dynamic Delay Plug-In with Optional Hardware Desktop Controller User Guide [™]

Contents

- 1 TC2290 NATIVE / TC2290-DT Legendary Dynamic Delay Plug-
- in
- **2 Important Safety Instructions**
- **3 LEGAL DISCLAIMER**
- **4 LIMITED WARRANTY**
- 5 Activate your TC2290 iLok license
- 6 Get a Free Demo License
- 7 Connecting the TC2290-DT Desktop Controller
- 8 Operating the TC2290
- 9 Other important information
- 10 tc electronic
- 11 Documents / Resources
 - 11.1 References
- **12 Related Posts**

TC2290 NATIVE / TC2290-DT Legendary Dynamic Delay Plug-in





Legendary Dynamic Delay Plug-in with Optional Hardware Desktop Controller and Signature Presets

Important Safety Instructions

WARNING: Terminals marked with this symbol carry electrical current of sufficient magnitude to constitute risk of electric shock. Use only high-quality professional speaker cables with 1/4" TS or twist-locking plugs pre-installed. All other installation or modification should be performed only by qualified personnel.

WARNING: This symbol, wherever it appears, alerts you to the presence of uninsulated dangerous voltage inside the enclosure – voltage that may be sufficient to constitute a risk of shock.

CAUTION: This symbol, wherever it appears, alerts you to important operating and maintenance instructions in the accompanying literature. Please read the manual.

CAUTION: To reduce the risk of electric shock, do not remove the top cover (or the rear section). No user serviceable parts inside. Refer servicing to qualified personnel.

CAUTION: To reduce the risk of fire or electric shock, do not expose this appliance to rain and moisture. The apparatus shall not be exposed to dripping or splashing liquids and no objects filled with liquids, such as vases, shall be placed on the apparatus.

CAUTION : These service instructions are for use by qualified service personnel only. To reduce the risk of electric shock do not perform any servicing other than that contained in the operation instructions.

Repairs have to be performed by qualified service personnel.

- 1. Read these instructions.
- 2. Keep these instructions.
- 3. Heed all warnings.
- 4. Follow all instructions.
- 5. Do not use this apparatus near water.
- 6. Clean only with dry cloth.
- 7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- 8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- 9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- 10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- 11. Use only attachments/accessories specified by the manufacturer.
- 12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tipover.
- 13. Unplug this apparatus during lightning storms or when unused for long periods of time.
- 14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- 15. The apparatus shall be connected to a MAINS socket outlet with a protective earthing connection.
- 16. Where the MAINS plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.
- 17. Correct disposal of this product : This symbol indicates that this product must not be disposed of with household waste, according to the WEEE Directive (2012/19/EU) and your national law. This product should be taken to a collection center licensed for the recycling of waste electrical and electronic equipment (EEE). The mishandling of this type of waste could have a possible negative impact on the environment and human health due to potentially hazardous substances that are generally associated with EEE. At the same time, your cooperation in the correct disposal of this product will contribute to the efficient use of natural resources. For more information about where you can take your waste equipment for recycling, please contact your local city office, or your household waste collection service.
- 18. Do not install in a confined space, such as a book case or similar unit.
- 19. Do not place naked flame sources, such as lighted candles, on the apparatus.
- 20. Please keep the environmental aspects of battery disposal in mind. Batteries must be disposed-of at a battery collection point.
- 21. Use this apparatus in tropical and/or moderate climates.

LEGAL DISCLAIMER

Music Tribe accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice.

All trademarks are the property of their respective owners. Midas, Klark Teknik, Lab Gruppen, Lake, Tannoy, Turbosound, TC Electronic, TC Helicon, Behringer, Bugera, Auratone and Coolaudio are trademarks or registered trademarks of Music Tribe Global Brands Ltd.

© Music Tribe Global Brands Ltd.

2020 All rights reserved.

LIMITED WARRANTY

For the applicable warranty terms and conditions and additional information regarding Music Tribe's Limited Warranty, please see complete details online at musictribe.com/warranty.

Thank you for purchasing the TC2290 dynamic delay

. Read through this Quick Start Guide to get things set up, and don't forget to download the full manual from tcelectronic.com for all the in-depth explanations.

Software Download and Installation

The combined TC2290 plug-in installer for both the NATIVE and DT Desktop Controller products can be downloaded from the following page:

www.tcelectronic.com/TC2290-dt/support/

The TC2290 plug-in requires either an active PACE iLok license (when buying the NATIVE version) or a connected Desktop Controller (when you have purchased the DT version). All parameters are available in the plug-in.

Save the installer file (.pkg or .msi file) in a convenient location on your hard drive. Double click the installer and follow the instructions to install the plug-in.



Activate your TC2290 iLok license

(when you have purchased the NATIVE version)

Step 1: Install iLok

The first step is to create an iLok user account at www.iLok.com and install the PACE iLok License Manager on your computer if it's your first time using iLok.

Step 2: Activation

In the received mail (when buying the NATIVE version) you will find your personal Activation Code. To activate your software, please use the Redeem an Activation Code feature in the PACE iLok License Manager.



Get a Free Demo License

Make use of this hassle-free offer to try out our plug-ins before you buy.

- 14-Day Trial Period
- · Fully Functional
- · No Feature Limitations
- · No Physical iLok Key Needed

Step 1: Install iLok

The first step is to create a free iLok user account at www.iLok.com and install the PACE iLok License Manager on your computer if it's your first time using iLok.

Step 2: Get your free license

Go to http://www.tcelectronic.com/brand/tcelectronic/free-trial-TC2290-native and enter your iLok User ID.


Step 3: Activation

Activate your software in the PACE iLok License Manager.

Connecting the TC2290-DT Desktop Controller

(when you have purchased the DT Desktop Controller version)

Getting the Desktop Controller up and running couldn't get any easier. Plug the included USB cable into the unit's rear micro-USB port, and connect the other end to a free USB port on your computer. The Desktop Controller is bus powered so no other power cables are necessary, and no additional drivers need to be manually installed.

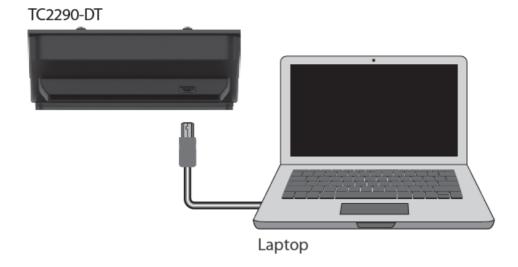

The Desktop Controller will light up upon successful connection. You can now apply the plug-in to a channel in your DAW to begin using the effect. This process may vary slightly depending on your software, but generally should require these steps:

- Select a channel or bus in your DAW to which you would like to add the effect Access the mixer page where you should see a section dedicated to effect slots
- Open the menu where you can select from a list of effect types, which probably includes many stock plugins
 that are included with the DAW. There should be submenu to view general VST/AU/AAX options.
- The plug-in will likely be found in a dedicated TC Electronic folder. Select the TC2290 and it will now be added to the signal chain.

Double click on the effect slot that contains the TC2290 to view the plug-in UI. There should be a green link icon at the bottom, and text that indicates successful connection between the plug-in and the Desktop Controller.

Operating the TC2290

After you have installed the plug-in, and either activated the iLok license or connected the TC2290-DT Desktop Controller via USB, you can begin inserting the plug-in to your tracks.

Adjustments to the effect are done in two ways. Either by using the plug-in user interface or via the physical Desktop Controller.



Download the full user manual from to learn about all the details of both the plug-in and the Desktop Controller functionality.

Other important information

- 1. Register online. Please register your new Music Tribe equipment right after you purchase it by visiting tcelectronic.com. Registering your purchase using our simple online form helps us to process your repair claims more quickly and efficiently. Also, read the terms and conditions of our warranty, if applicable.
- 2. Malfunction. Should your Music Tribe Authorized Reseller not be located in your vicinity, you may contact the Music Tribe Authorized Fulfiller for your country listed under "Support" at tcelectronic.com. Should your country not be listed, please check if your problem can be dealt with by our "Online Support" which may also be found under "Support" at tcelectronic.com. Alternatively, please submit an online warranty claim at tcelectronic.com BEFORE returning the product.
- 3. Power Connections. Before plugging the unit into a power socket, please make sure you are using the correct mains voltage for your particular model. Faulty fuses must be replaced with fuses of the same type and rating without exception.

Hereby, Music Tribe declares that this product is in compliance with Directive 2014/30/EU, Directive 2011/65/EU and Amendment 2015/863/EU, Directive 2012/19/EU, Regulation 519/2012 REACH SVHC and Directive 1907/2006/EC.

Full text of EU DoC is available at https://community.musictribe.com/

EU Representative: Music Tribe Brands DK A/S

Address: Ib Spang Olsens Gade 17, DK - 8200 Aarhus N, Denmark

tc electronic

Documents / Resources



tc electronic TC2290 NATIVE Legendary Dynamic Delay Plug-In with Optional Hardware Desktop Controller [pdf] User Guide

TC2290 NATIVE, TC2290-DT, Legendary Dynamic Delay Plug-In with Optional Hardware Deskt op Controller

References

- Music Tribe
- 12 TC Electronic | Home
- iLok.com
- C TC Electronic | Home
- © TC Electronic | Free Trial TC2290 Native
- Music Tribe

Manuals+,