Manuals+ — User Manuals Simplified.

ΞTCI
**153CP
Desktop
Microphone**

TCI-153CP Desktop Microphone Owner's Manual

Contents

ΞTCI

TCI-153CP Desktop Microphone

- **Model:** TCI-153CP
- **Power Supply:** DC3V or Phantom Power 48V

Package Contents

- Microphone Base ………………………………………………… x1
- Gooseneck (41cm)…………………………………………………..x1
- Connection Cable (8m)…………………………………………x1
- Connection Cable (8m)…………………………………………x1
- XLR to 6.35mm (1/4″) plug adapter………………………….x1
- User Manual …………………………………………………..x1

Descriptions

This desktop microphone is an ideal solution for meetings, conferences, and public address needs. It features a sophisticated switch ON/OFF to support push-to-talk and push-to-luck, and features a flexible gooseneck,which allows you to angle it to an ideal speaking position, a removable foam pop filter included. The 8m cable with a female XLR plug is ready for connection with the microphone base, at the other end there is a male XLR plug ready for connection with the amplifier,and a XLR to 6.35mm (1/4″) plug adapter is provided. The microphone is powered using a DC3V battery in the base or by connecting to an XLR jack with +48V Phantom Power.

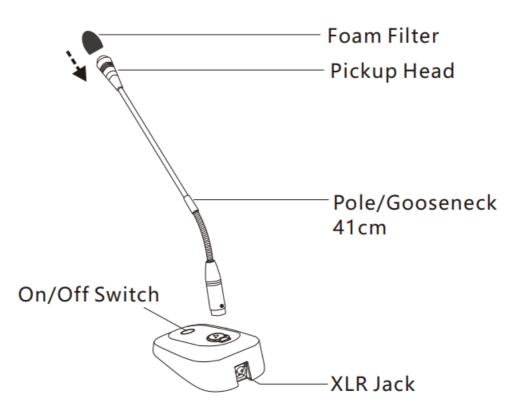## Specifications

- **Model No.: TCI-153CP**
- **Capsule Type:**
  - Condenser
- **Frequency Response:**

- 30Hz-20kHz
- **Polar Pattern:**
  - Cardioid
- **Output:**
  - 200Ω / Balanced
- **Sensitivity:**
  - -42±2dB
- **Sound Pick-up Distance:**
  - 45cm
- **Base Dimension (WxDxH):**
  - 114x168x57mm
- **Gooseneck Length:**
  - 410mm
- **Battery Working Time:**
  - 24hrs (3V battery)
- **Power Supply:**
  - DC3V battery or 48V Phantom Power
- **Indicator:**
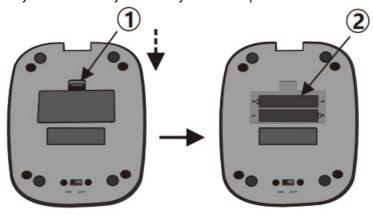 - Base OLED, Mic. LED
- **Net Weight:**
  - 0.60kg

Operating Instruction

1. Assemble the microphone Insert the microphone pole into the microphone base mounting socket in a straight line, and put the foam filter
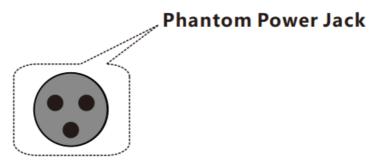
Supply the power

When using the DC3V battery Put the battery in the way of correct polar.
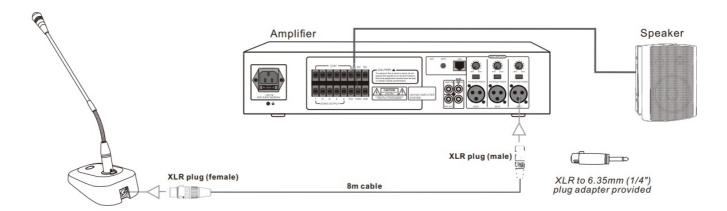

When use +48V Phantom Power

Use the provided cable to connect with the Phantom Power jack on the amplifier or audio mixer (please refer to step 3).

Please do not put the battery on if you decide to use the +48V Phantom Power.

Connect microphone with audio cable to PA equipment

Adjust the volume of the amplifier to the "0" position before turning on the amplifier and microphone, then adjust the volume of the amplifier slowly to make sure the microphone achieves the best effect.

Attention

- The speaker will whistle if the microphone is too near to the speaker or the volume of the amplifier is too high, take care of keeping a certain distance and to limit the volume of the amplifier otherwise damage may be caused to the amplifier or the speaker.
- Take out the battery if the microphone will not be used for a long time, otherwise, the device may be damaged by the spillage of the degenerative battery.

Frequently Asked Questions (FAQ)

Q: What power options are available for the TCI-153CP microphone?

A: The microphone can be powered using either DC3V batteries or by connecting it to an XLR jack with +48V Phantom Power.

Q: How do I connect the microphone to my audio equipment?
A: Use the provided XLR cable to connect the microphone base to an amplifier or audio mixer. Ensure that the amplifier volume is appropriate for optimal performance.

Documents / Resources

TCI TCI-153CP Desktop Microphone [pdf] Owner's Manual
TCI-153CP Desktop Microphone, TCI-153CP, Desktop Microphone, Microphone

References

- **User Manual**