



TCP Select Series Linear High Bay Luminaire Owner's Manual

[Home](#) » [TCP](#) » TCP Select Series Linear High Bay Luminaire Owner's Manual 

TCP Select Series Linear High Bay Luminaire



Contents

- [1 Important instruction](#)
- [2 Reasons to choose the Select Series Linear High Bay from TCP](#)
- [3 Ideal Applications](#)
- [4 Specifications](#)
- [5 Applications](#)
- [6 Features](#)
- [7 Hardware Included](#)
- [8 Dimensions](#)
- [9 Photometric Report](#)
- [10 Characteristics](#)
- [11 Photometric Report](#)
- [12 Zonal Lumen Summary](#)
- [13 Technology Cast In A Beautiful Light](#)
- [14 Customer Support](#)
- [15 Documents / Resources](#)
 - [15.1 References](#)
- [16 Related Posts](#)

Important instruction

The Select Series Linear High Bay by TCP is a versatile solution for endless applications. With an all-metal frame and included mounting hardware, the HB by TCP is quick to install and will provide a long-lasting, durable light source for years to come.

Reasons to choose the Select Series Linear High Bay from TCP

- Steel frame with no scalloping, pop riveted, and rounded-edge corners
- Frosted lens standard to eliminate glare
- Smooth, even lighting without shadows
- Wide beam spread due to angled LED design providing clean cutoff
- includes 6 foot power cord
- 50,000 hour rated life
- 0-10V smooth dimming Includes V brackets and 5ft hanging chain
- Damp location rated

Ideal Applications

- High ceiling locations
- Commercial settings
- Industrial settings
- Retail settings
- Warehouses

Specifications

Input Line Voltage	120-277 VAC
Input Line Frequency (Hz)	50/60Hz
Surge Protection	6kV
Wattage	160/185/200W
Lumens	24,600/28,000/30,500L
Lumens per Watt (LPW)	>130 LPW
Rated Life	50,000 hours
Minimum Starting Temperature	-20°C
Maximum Operating Temperature	50°C
CRI	>80
Power Factor	>90%
THD	<20%
Ratings	UL/cUL damp location rated, DLC Standard 5.1
Controls	0-10V dimming (standard)

Listings

RoHS Compliant
DLC 5.1 Standard

Warranty

Five year limited warranty against defects in manufacturing.

Applications

The Select Series Linear High Bay by TCP is a versatile solution for endless applications. With an all-metal frame and included mounting hardware, the HB by TCP is quick to install and will provide a long-lasting, durable light source for years to come. Best for use in high ceiling locations in commercial, industrial, retail, or warehouse settings.

Features

- Post painted steel frame with no scalloping, pop riveted, and rounded-edge corners
- Frosted lens standard to eliminate glare
- No shadows for smooth, even lighting
- Damp location rated
- 250W or 400W HID equivalent
- Wide beam spread

Hardware Included


- 2 Tong Hangers
- 5' Jack Chains

- 6-Foot Pre-wired Cord

Catalog Ordering Matrix Example: HB2UZDSW5CCT					
FAMILY	SIZE	VOLTAGE	DIMMING	WATTAGE1 (LUMEN PACKAGE S2)	COLOR TEMPERATURE
HB – HB Series Linear High Bay	2 – 2 Feet	U – 120-277V	ZD – 0-10V Dimming	SW5 – 160/185/200W (24,600/28,000/30,500L)	CCT – 4000K/5000K Selectable


1. Actual wattage may differ by +/- 10%.
2. Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

Dimensions

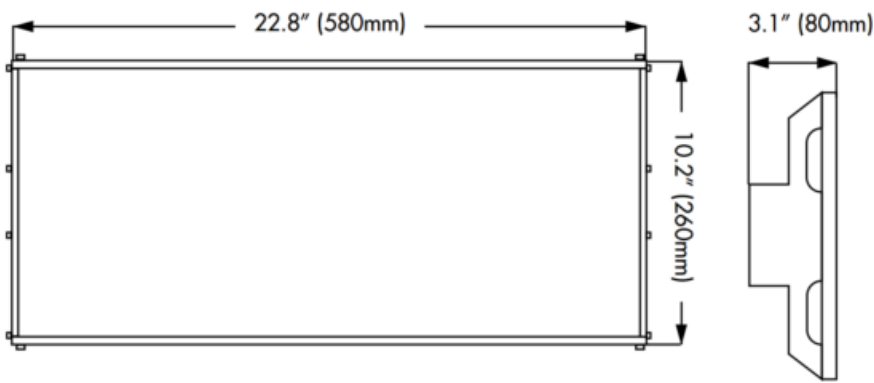

Photometric Report

Polar Graph

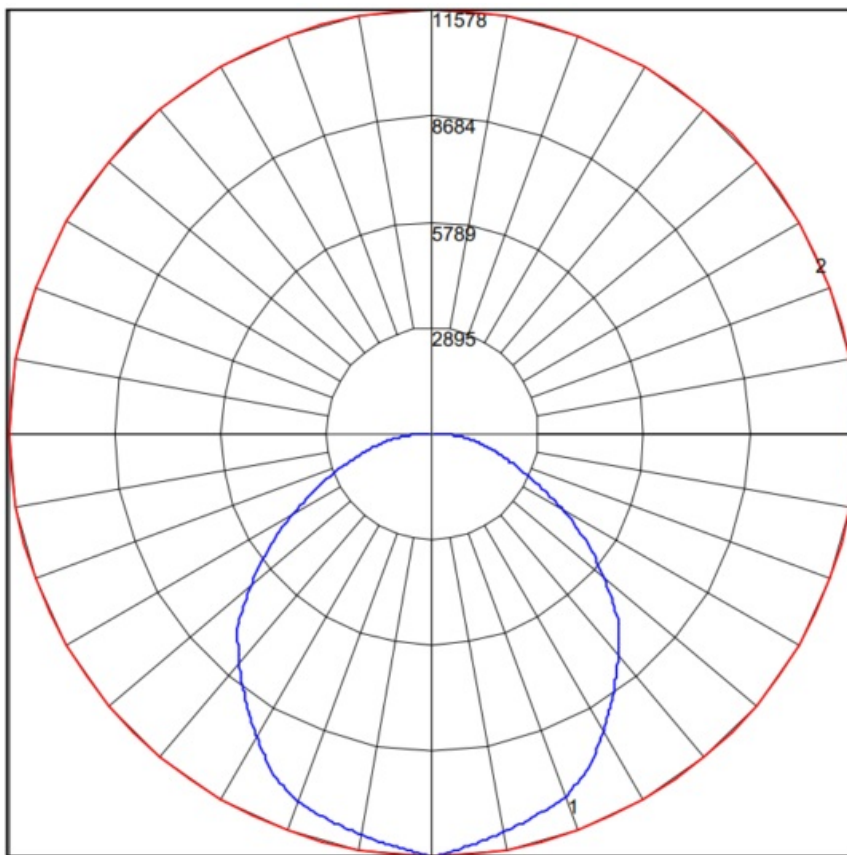

Maximum Candela = 11578 Located At Horizontal Angle = 0, Vertical Angle = 0

1 – Vertical Plane Through Horizontal Angles (0 – 180) (Through Max. Cd.)


2 – Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)

Characteristics

Luminaire Lumens	29997
Total Luminaire Efficiency	100 %
Luminaire Efficacy Rating (LER)	158
Total Luminaire Watts	190.407
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.22
Spacing Criterion (90-270)	1.24
Spacing Criterion (Diagonal)	1.34
Basic Luminous Shape	Rectangular
Luminous Length (0-180)	1.12 m
Luminous Width (90-270)	0.54 m
Luminous Height	0.00 m

Specifications and dimensions subject to change without notice.

Based off wattage setting at 200W

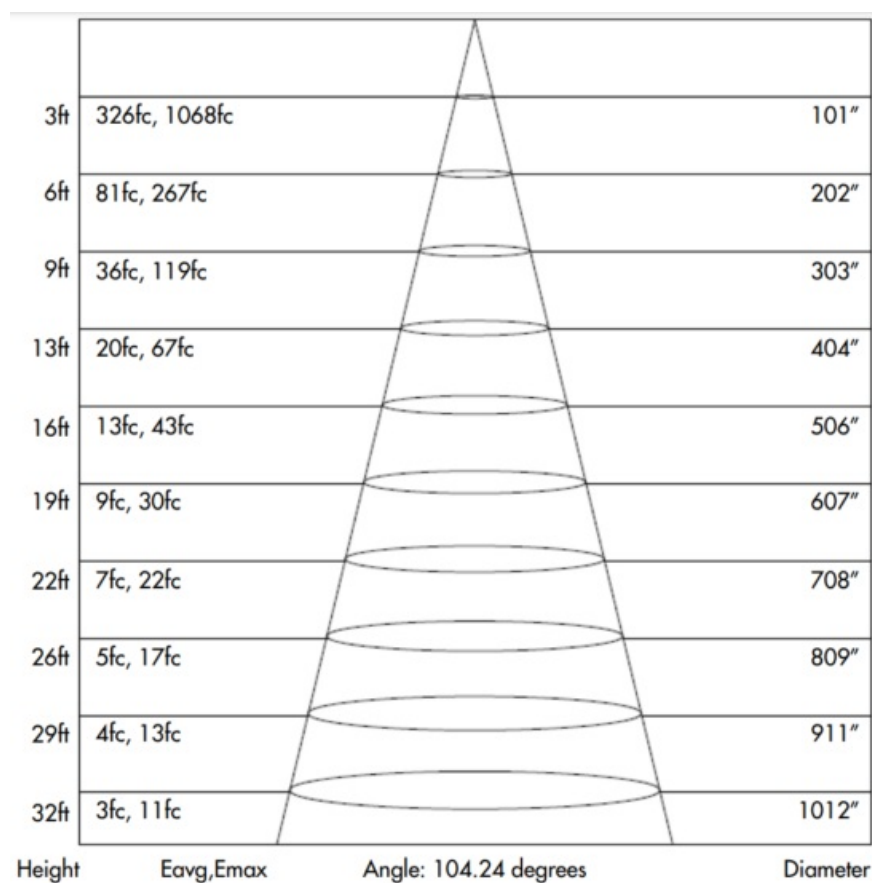

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Photometric Report

Based on photometric data for TCP Item # HB2UZDSW5CCT

Coefficients of Utilization – Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
R W	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	100	97	106	102	99	95	98	95	92	94	92	89	91	89	87	85
2	100	92	85	79	97	90	84	79	86	81	77	83	79	75	80	76	73	71
3	91	81	73	67	89	89	72	66	76	70	65	74	68	64	71	66	63	60
4	84	72	63	57	81	71	63	56	68	61	56	66	60	55	64	58	54	52
5	77	64	56	49	75	63	55	49	61	54	48	59	53	48	57	52	47	45
6	71	58	49	43	69	57	49	43	55	48	42	54	47	42	52	46	42	40
7	66	53	44	38	64	52	44	38	50	43	38	49	42	37	48	42	37	35
8	62	48	40	34	60	48	40	34	46	39	34	45	38	34	44	38	33	31
9	58	44	36	31	56	44	36	31	43	35	30	41	35	30	40	35	30	28
10	54	41	33	28	53	40	33	28	39	32	28	38	32	28	38	32	27	26

Zonal Lumen Summary

Zone	Lumens	%Lamp	%Fixt
0-20	4163.26	13.90	13.90
0-30	8827.01	29.40	29.40
0-40	14337.76	47.80	47.80
0-60	24526.11	81.80	81.80
0-80	29450.6	98.20	98.20
0-90	29996.76	100.00	100.00
10-90	28914.93	96.40	96.40
20-40	10174.5	33.90	33.90
20-50	15699.55	52.30	52.30
40-70	13392.36	44.60	44.60
60-80	4924.49	16.40	16.40
70-80	1720.48	5.70	5.70
80-90	546.16	1.80	1.80
90-110	0.00	0.00	0.00
90-120	0.00	0.00	0.00
90-130	0.00	0.00	0.00
90-150	0.00	0.00	0.00
90-180	0.00	0.00	0.00
110-180	0.00	0.00	0.00
0-180	29996.76	100.00	100.00

Total Luminaire Efficiency = N.A.%

Specifications and dimensions subject to change without notice.

Technology Cast In A Beautiful Light

For over 30 years, TCP has been designing, developing and delivering energy-efficient lighting into the market. Thanks to our cutting-edge technology and manufacturing expertise, we have shipped billions of high quality lighting products. With TCP, you can count on a lighting product that is designed to meet the needs of the market – that transforms your surroundings and envelopes you in warmth – lighting that generates beauty with every flip of the switch.

Customer Support



5 YEAR
WARRANTY

Not all versions of this product are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: [800-324-1496](tel:800-324-1496) | tcpi.com

©TCP APR 2024/WF525250

For the most up-to-date specs and warranty information, please visit www.tcpi.com

Not all versions of this product are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.

For more information on the quality and care TCP can deliver, call us at 800.324.1496 or visit tcpi.com
325 Campus Dr. | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516



Documents / Resources



[TCP Select Series Linear High Bay Luminaire](#) [pdf] Owner's Manual

Select Series, Select Series Linear High Bay Luminaire, Linear High Bay Luminaire, High Bay Luminaire, Luminaire

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.