




teleadapt H0701B 7 In 1 USB Type-C Hub User Manual

[Home](#) » [teleadapt](#) » teleadapt H0701B 7 In 1 USB Type-C Hub User Manual 

teleadapt H0701B 7 In 1 USB Type-C Hub



Contents

- [1 7-in-1 USB Type-C® Slimline Hub](#)
- [2 Product Description](#)
- [3 Features and Specifications](#)
- [4 Connections](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)

7-in-1 USB Type-C® Slimline Hub

Thank you for purchasing this TeleAdapt 7-in-1 USB TypeC® Slimline Hub. Please read this User Manual carefully before using the hub and then keep the manual in a safe place for future reference.

Product Description

This USB Type-C® Slimline Hub is an integrated solution for power, data, video, SD card reader and Ethernet. It works with any USB Type-C® or Thunderbolt host PC that supports DP Alt Mode and allows you to connect it to:

- an HDMI display for video,
- USB Type-A devices for data transmission,
- Gigabit Ethernet through the RJ45 port,
- SD/MMC and Micro SD cards.

In addition the USB Type-C® female port supports charging for the host PC and additional power for the hub.

Features and Specifications

- Slim and compact aluminum housing.
- Compatible with USB Type-C® and Thunderbolt host PC, laptop, tablet or smartphone with DP Alt Mode.
- **Host**
 - DP 1.4 Alt Mode, HBR3 max. 32.4Gbps (8.1Gbps/ lane for video and data transfer).
- **HDMI**
 - 4K@60Hz (4K/30Hz if DP Alt Mode 1.2 host).
- **HDR.**
 - RGB 8/10/12 bps; YCbCr4:2:2/YCbCr4:2:0 8/10/12 bpc.
 - HDCP 2.3 and 1.4.
- **Ethernet**
 - 10/100/1000Mbps.
- **USB Type A (x2)**
 - USB 3.0, max. 5Gbps data transfer.
 - Total combined output max 8W, single port output max (7.5W, 5V/1.5A).
- **USB Type-C®**
 - Fast Role Swap.
 - 8W dedicated to hub, remaining power (max. 92W) available to host.
 - PD Charging 100W (20V/5A).
- **SD/Micro SD**
 - Secure Digital v3.0 UHS-I
 - SDR12 (12.5Mbyte/s)/SDR25(25Mbyte/s)/
SDR50(50Mbyte/s)/DDR50(50Mbyte/s)/
SDR104(104Mbyte/s)
 - SD/Micro SD can work simultaneously



HDMI



Micro SD/SD



USB Type-A



USB Type-C®



Ethernet

Ports

Upstream (host) 1 x USB-C Male Downstream 1 x HDMI Female
2 x USB A Female
1 x RJ45
1 x SD card slot
1 x Micro SD card slot
1 x USB-C Female (100W PD charging)

Physical

Weight 88.2g

Size 136.1 x 34 x 14 mm

Warranty

Limited 1 Year

Environmental

Operating Temp. 0°C to +45°C

Operating Humidity 10% to 90 % RH (non-condensing)

Storage Temp. -10°C to +70°C

Storage Humidity 10% to 90 % RH (non-condensing)


Power

USB-C PD Charging 100W(20V/5A)

Regulatory


Certifications FCC, CE

Connections

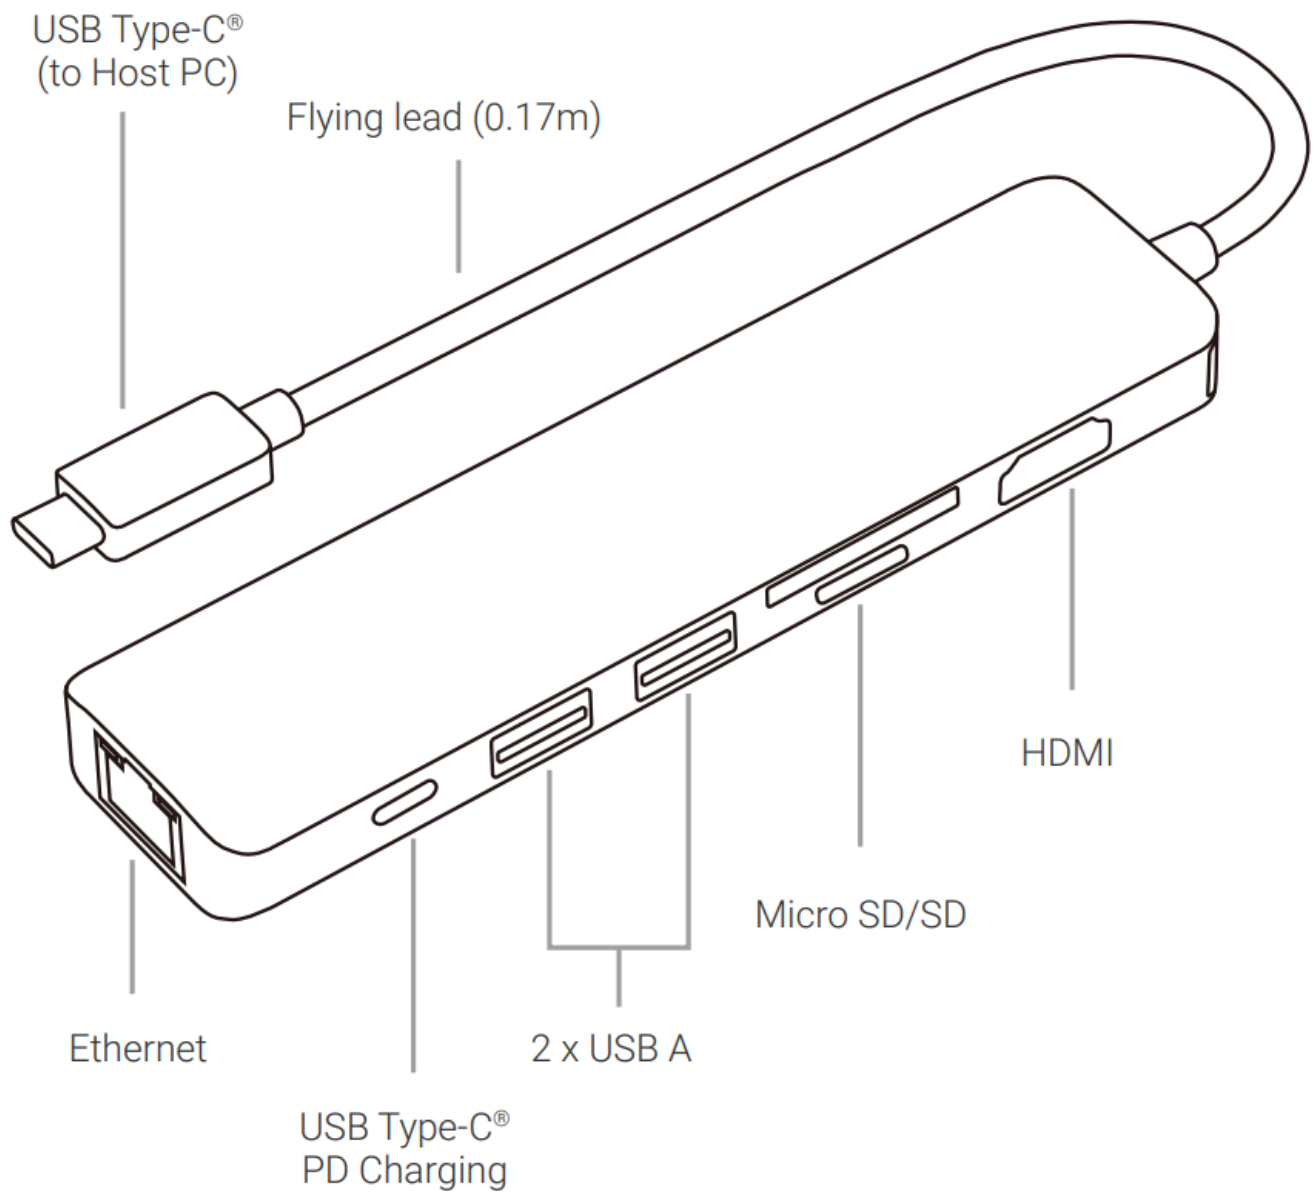

teleadapt

Documents / Resources



[teleadapt H0701B 7 In 1 USB Type-C Hub](#) [pdf] User Manual

H0701B, H0701SG, H0701B 7 In 1 USB Type-C Hub, 7 In 1 USB Type-C Hub, USB Type-C Hub, Type-C Hub, Hub