



TELARAN 435006 LCD Display for MC 24V Series User Manual

[Home](#) » [TELARAN](#) » TELARAN 435006 LCD Display for MC 24V Series User Manual 

TELARAN COMMUNICATIONS (1986) LTD
טלראן תקשורת (1986) בע"מ

LCD display for MC 24V series
p.n.435006
User Manual



Contents

[1 Features](#)

[2 Installation Dimensions](#)

[3 Technical Parameters](#)

[4 Documents / Resources](#)

[5 Related Posts](#)

Features

- LCD graphical main menu, for real-time monitoring of real-time data and operating status of the controller.
- Two-button design for menu viewing and parameters setting, easy to operate.
- No external power supply is required, and the LCD unit can be powered by connecting it to the controller via a communication cable.
- Embedded installation.
- Industrial grade design, allowing for use in a variety of harsh environments.


Product picture



Installation Dimensions

Product dimensions: 104.5 × 55.5 × 11.8mm

Installation dimensions: 96 × ϕ 3.5mm

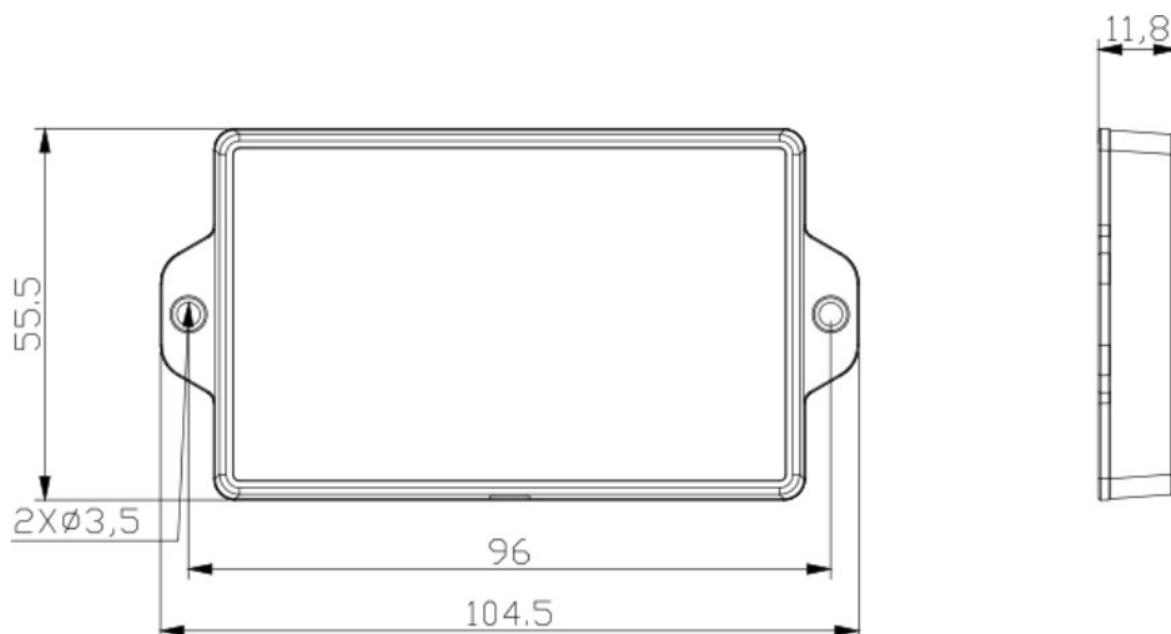

Technical Parameters

Items	Parameter values
Applicable models of controller	p.n.435008
	p.n.435009
Input voltage	5V-12V
Standby power consumption	< 0.03W
Operating power consumption	< 0.04W
Fixed baud rate	9600bps
Communication mode	TTL
Interface type	PH2.0
Connection cable length	1.5M
Operating temperature	-35°C +65°C
IP rating	IP32
Weight	90g
Altitude	≤ 3000M
Dimensions	104.5 × 55.5 × 11.8mm



Fax: 03-5214524

office@telran.co.il

Phone: 03-5575110

www.telran.co.il

Technical support *2023



Documents / Resources

	TELRAN 435006 LCD Display for MC 24V Series [pdf] User Manual 435006, LCD Display for MC 24V Series, 435006 LCD Display for MC 24V Series
---	--

[Manuals+](#)