



TEMPANY
Ring Sizing

CHECK YOUR RING SIZE FROM BELOW TABLE WITH YOUR METHOD		METHOD 1	METHOD 2
US RING SIZE	UK RING SIZE	CIRCUMFERENCE	DIAMETER
(ORDER SIZE)		mm	inch
US 5.0	P	46.2	1.81
US 5.5	Q	46.5	1.83
US 6.0	R	46.8	1.84
US 6.5	S	47.1	1.85
US 7.0	T	47.4	1.87
US 7.5	U	47.7	1.88
US 8.0	V	48.0	1.89
US 8.5	W	48.3	1.90
US 9.0	X	48.6	1.91
US 9.5	Y	48.9	1.92
US 10.0	Z	49.2	1.94
US 10.5	AA	49.5	1.95
US 11.0	AB	49.8	1.96
US 11.5	AC	50.1	1.97
US 12.0	AD	50.4	1.98
US 12.5	AE	50.7	1.99
US 13.0	AF	51.0	2.00
US 13.5	AG	51.3	2.01
US 14.0	AH	51.6	2.02
US 14.5	AI	51.9	2.03
US 15.0	AJ	52.2	2.04
US 15.5	AK	52.5	2.05
US 16.0	AL	52.8	2.06
US 16.5	AM	53.1	2.07
US 17.0	AN	53.4	2.08
US 17.5	AO	53.7	2.09
US 18.0	AP	54.0	2.10
US 18.5	AQ	54.3	2.11
US 19.0	AR	54.6	2.12
US 19.5	AS	54.9	2.13
US 20.0	AT	55.2	2.14
US 20.5	AU	55.5	2.15
US 21.0	AV	55.8	2.16
US 21.5	AW	56.1	2.17
US 22.0	AX	56.4	2.18
US 22.5	AY	56.7	2.19
US 23.0	AZ	57.0	2.20
US 23.5	BA	57.3	2.21
US 24.0	BB	57.6	2.22
US 24.5	BC	57.9	2.23
US 25.0	BD	58.2	2.24
US 25.5	BE	58.5	2.25
US 26.0	BF	58.8	2.26
US 26.5	BG	59.1	2.27
US 27.0	BH	59.4	2.28
US 27.5	BI	59.7	2.29
US 28.0	BJ	60.0	2.30
US 28.5	BK	60.3	2.31
US 29.0	BL	60.6	2.32
US 29.5	BM	60.9	2.33
US 30.0	BN	61.2	2.34
US 30.5	BO	61.5	2.35
US 31.0	BP	61.8	2.36
US 31.5	BQ	62.1	2.37
US 32.0	BR	62.4	2.38
US 32.5	BS	62.7	2.39
US 33.0	BT	63.0	2.40
US 33.5	BU	63.3	2.41
US 34.0	BV	63.6	2.42
US 34.5	BW	63.9	2.43
US 35.0	BX	64.2	2.44
US 35.5	BY	64.5	2.45
US 36.0	BZ	64.8	2.46
US 36.5	CA	65.1	2.47
US 37.0	CB	65.4	2.48
US 37.5	CC	65.7	2.49
US 38.0	CD	66.0	2.50
US 38.5	CE	66.3	2.51
US 39.0	CF	66.6	2.52
US 39.5	CG	66.9	2.53
US 40.0	CH	67.2	2.54
US 40.5	CI	67.5	2.55
US 41.0	CJ	67.8	2.56
US 41.5	CK	68.1	2.57
US 42.0	CL	68.4	2.58
US 42.5	CM	68.7	2.59
US 43.0	CN	69.0	2.60
US 43.5	CO	69.3	2.61
US 44.0	CP	69.6	2.62
US 44.5	CQ	69.9	2.63
US 45.0	CR	70.2	2.64
US 45.5	CS	70.5	2.65
US 46.0	CT	70.8	2.66
US 46.5	CU	71.1	2.67
US 47.0	CV	71.4	2.68
US 47.5	CW	71.7	2.69
US 48.0	CX	72.0	2.70
US 48.5	CY	72.3	2.71
US 49.0	CZ	72.6	2.72
US 49.5	DA	72.9	2.73
US 50.0	DB	73.2	2.74
US 50.5	DC	73.5	2.75
US 51.0	DD	73.8	2.76
US 51.5	DE	74.1	2.77
US 52.0	DF	74.4	2.78
US 52.5	DG	74.7	2.79
US 53.0	DH	75.0	2.80
US 53.5	DI	75.3	2.81
US 54.0	DJ	75.6	2.82
US 54.5	DK	75.9	2.83
US 55.0	DL	76.2	2.84
US 55.5	DM	76.5	2.85
US 56.0	DN	76.8	2.86
US 56.5	DO	77.1	2.87
US 57.0	DP	77.4	2.88
US 57.5	DQ	77.7	2.89
US 58.0	DR	78.0	2.90
US 58.5	DS	78.3	2.91
US 59.0	DT	78.6	2.92
US 59.5	DU	78.9	2.93
US 60.0	DV	79.2	2.94
US 60.5	DW	79.5	2.95
US 61.0	DX	79.8	2.96
US 61.5	DY	80.1	2.97
US 62.0	DZ	80.4	2.98
US 62.5	EA	80.7	2.99
US 63.0	EB	81.0	3.00
US 63.5	EC	81.3	3.01
US 64.0	ED	81.6	3.02
US 64.5	EE	81.9	3.03
US 65.0	EF	82.2	3.04
US 65.5	EG	82.5	3.05
US 66.0	EH	82.8	3.06
US 66.5	EI	83.1	3.07
US 67.0	EJ	83.4	3.08
US 67.5	EK	83.7	3.09
US 68.0	EL	84.0	3.10
US 68.5	EM	84.3	3.11
US 69.0	EN	84.6	3.12
US 69.5	EO	84.9	3.13
US 70.0	EP	85.2	3.14
US 70.5	EQ	85.5	3.15
US 71.0	ER	85.8	3.16
US 71.5	ES	86.1	3.17
US 72.0	ET	86.4	3.18
US 72.5	EU	86.7	3.19
US 73.0	EV	87.0	3.20
US 73.5	EW	87.3	3.21
US 74.0	EX	87.6	3.22
US 74.5	EY	87.9	3.23
US 75.0	EZ	88.2	3.24
US 75.5	FA	88.5	3.25
US 76.0	FB	88.8	3.26
US 76.5	FC	89.1	3.27
US 77.0	FD	89.4	3.28
US 77.5	FE	89.7	3.29
US 78.0	FF	90.0	3.30
US 78.5	FG	90.3	3.31
US 79.0	FH	90.6	3.32
US 79.5	FI	90.9	3.33
US 80.0	FJ	91.2	3.34
US 80.5	FK	91.5	3.35
US 81.0	FL	91.8	3.36
US 81.5	FM	92.1	3.37
US 82.0	FN	92.4	3.38
US 82.5	FO	92.7	3.39
US 83.0	FP	93.0	3.40
US 83.5	FQ	93.3	3.41
US 84.0	FR	93.6	3.42
US 84.5	FS	93.9	3.43
US 85.0	FT	94.2	3.44
US 85.5	FU	94.5	3.45
US 86.0	FV	94.8	3.46
US 86.5	FW	95.1	3.47
US 87.0	FX	95.4	3.48
US 87.5	FY	95.7	3.49
US 88.0	FZ	96.0	3.50
US 88.5	GA	96.3	3.51
US 89.0	GB	96.6	3.52
US 89.5	GC	96.9	3.53
US 90.0	GD	97.2	3.54
US 90.5	GE	97.5	3.55
US 91.0	GF	97.8	3.56
US 91.5	GG	98.1	3.57
US 92.0	GH	98.4	3.58
US 92.5	GI	98.7	3.59
US 93.0	GO	99.0	3.60
US 93.5	GP	99.3	3.61
US 94.0	GQ	99.6	3.62
US 94.5	GR	99.9	3.63
US 95.0	GS	100.2	3.64
US 95.5	GT	100.5	3.65
US 96.0	GU	100.8	3.66
US 96.5	GV	101.1	3.67
US 97.0	GW	101.4	3.68
US 97.5	GX	101.7	3.69
US 98.0	GY	102.0	3.70
US 98.5	GZ	102.3	3.71
US 99.0	HA	102.6	3.72
US 99.5	HB	102.9	3.73
US 100.0	HC	103.2	3.74
US 100.5	HD	103.5	3.75
US 101.0	HE	103.8	3.76
US 101.5	HF	104.1	3.77
US 102.0	HG	104.4	3.78
US 102.5	HH	104.7	3.79
US 103.0	HI	105.0	3.80
US 103.5	HJ	105.3	3.81
US 104.0	HK	105.6	3.82
US 104.5	HL	105.9	3.83
US 105.0	HM	106.2	3.84
US 105.5	HN	106.5	3.85
US 106.0	HO	106.8	3.86
US 106.5	HP	107.1	3.87
US 107.0	HQ	107.4	3.88
US 107.5	HR	107.7	3.89
US 108.0	HS	108.0	3.90
US 108.5	HT	108.3	3.91
US 109.0	HU	108.6	3.92
US 109.5	HV	108.9	3.93
US 110.0	HW	109.2	3.94
US 110.5	HX	109.5	3.95
US 111.0	HY	109.8	3.96
US 111.5	HZ	110.1	3.97
US 112.0	IA	110.4	3.98
US 112.5	IB	110.7	3.99
US 113.0	IC	111.0	4.00
US 113.5	ID	111.3	4.01
US 114.0	IE	111.6	4.02
US 114.5	IF	111.9	4.03
US 115.0	IG	112.2	4.04
US 115.5	IH	112.5	4.05
US 116.0	II	112.8	4.06
US 116.5	IJ	113.1	4.07
US 117.0	IK	113.4	4.08
US 117.5	IL	113.7	4.09
US 118.0	IM	114.0	4.10
US 118.5	IN	114.3	4.11
US 119.0	IO	114.6	4.12
US 119.5	IP	114.9	4.13
US 120.0	IQ	115.2	4.14
US 120.5	IR	115.5	4.15
US 121.0	IS	115.8	4.16
US 121.5	IT	116.1	4.17
US 122.0	IU	116.4	4.18
US 122.5	IV	116.7	4.19
US 123.0	IW	117.0	4.20
US 123.5	IX	117.3	4.21
US 124.0	IY	117.6	4.22
US 124.5	IZ	117.9	4.23
US 125.0	JA	118.2	4.24
US 125.5	JB	118.5	4.25
US 126.0	JC	118.8	4.26
US 126.5	JD	119.1	4.27
US 127.0	JE	119.4	4.28
US 127.5	JF	119.7	4.29
US 128.0	JG	120.0	4.30
US 128.5	JH	120.3	4.31
US 129.0	JI	120.6	4.32
US 129.5	JB	120.9	4.33
US 130.0	JC	121.2	4.34
US 130.5	JD	121.5	4.35
US 131.0	JE	121.8	4.36
US 131.5	JF	122.1	4.37
US 132.0	JG	122.4	4.38
US 132.5	JH	122.7	4.39
US 133.0	JI	123.0	4.40
US 133.5	JB	123.3	4.41
US 134.0	JC	123.6	4.42
US 134.5	JD	123.9	4.43
US 135.0	JE	124.2	4.44
US 135.5	JF	124.5	4.45
US 136.0	JG	124.8	4.46
US 136.5	JH	125.1	4.47
US 137.0	JI	125.4	4.48
US 137.5	JB	125.7	4.49
US 138.0	JC	126.0	4.50
US 138.5	JD	126.3	4.51
US 139.0	JE	126.6	4.52
US 139.5	JF	126.9	4.53
US 140.0	JG	127.2	4.54
US 140.5	JH	127.5	4.55
US 141.0	JI	127.8	4.56
US 141.5	JB	128.1	4.57
US 142.0	JC	128.4	4.58
US 142.5	JD	128.7	4.59
US 143.0	JE	129.0	4.60
US 143.5	JF	129.3	4.61
US 144.0	JG	129.6	4.62
US 144.5	JH	129.9	4.63
US 145.0	JI	130.2	4.64
US 145.5	JB	130.5	4.65
US 146.0	JC	130.8	4.66
US 146.5	JD	131.1	4.67
US 147.0	JE	131.4	4.68
US 147.5	JF	131.7	4.69
US 148.0	JG	132.0	4.70
US 148.5	JH	132.3	4.71
US 149.0	JI	132.6	4.72
US 149.5	JB	132.9	4.73
US 150.0	JC	133.2	4.74
US 150.5	JD	133.5	4.75
US 151.0	JE	133.8	4.76
US 151.5	JF	134.1	4.77
US 152.0	JG	134.4	4.78
US 152.5	JH	134.7	4.79
US 153.0	JI	135.0	4.80
US 153.5	JB	135.3	4.81
US 154.0	JC	135.6	4.82
US 154.5	JD	135.9	4.83
US 155.0	JE	136.2	4.84
US 155.5	JF	136.5	4.85
US 156.0	JG	136.8	4.86
US 156.5	JH	137.1	4.87

CHECK YOUR RING SIZE FROM BELOW TABLE WITH YOUR METHOD		METHOD 1		METHOD 2	
					
US RING SIZE (ORDER SIZE)	UK RING SIZE	CIRCUMFERENCE		DIAMETER	
		mm	inch	mm	inch
US 3.0	F	44.2	1.74	14.07	0.554
US 3.5	G	45.5	1.79	14.48	0.570
US 4.0	H	46.8	1.84	14.88	0.586
US 4.5	I	48	1.89	15.29	0.602
US 5.0	J 1/2	49.3	1.94	15.70	0.618
US 5.5	K 1/2	50.6	1.99	16.10	0.634
US 6.0	L 1/2	51.9	2.04	16.51	0.650
US 6.5	M 1/2	53.1	2.09	16.92	0.666
US 7.0	N 1/2	54.4	2.14	17.32	0.682
US 7.5	O 1/2	55.7	2.19	17.73	0.698
US 8.0	P 1/2	57	2.24	18.14	0.714
US 8.5	Q 1/2	58.3	2.29	18.54	0.730
US 9.0	R 1/2	59.5	2.34	18.95	0.746
US 9.5	S 1/2	60.8	2.39	19.35	0.762
US 10.0	T 1/2	62.1	2.44	19.76	0.778
US 10.5	U 1/2	63.4	2.49	20.17	0.794
US 11.0	V 1/2	64.4	2.54	20.57	0.810
US 11.5	W 1/2	65.9	2.59	20.98	0.826
US 12.0	X 1/2	66.6	2.65	21.39	0.842
US 12.5	Z	68.5	2.70	21.79	0.858
US 13.0	Z1	69.7	2.75	22.20	0.874
US 13.5	Z2	71	2.80	22.61	0.890
US 14.0	Z3	72.3	2.85	23.01	0.906
US 14.5	Z4	73.6	2.90	23.42	0.922

Product Information

Specifications:

- Product: Ring Sizing Tool
- Manufacturer: TempAmy
- Compatibility: Rings of similar width
- Website: www.tempamy.co

Product Usage Instructions

Step 1: Print the Page

Print this page on A4 paper, ensuring it is set to 100% scale (not 'fit to page').

Step 2: Check Printing

To verify the correct printing, place a credit card in the box below. It should fit perfectly within the box.

Step 3: Determine Ring Size

1. Choose an existing ring with a similar width to the one you intend to purchase.
2. Place the band of your ring on the provided chart below.
3. Match the inside edge of your ring band to the nearest size circle on the chart.
4. If your size falls between two circles, it is recommended to select the larger size for a comfortable fit.


Ring Sizing Instruction

- Step 1

Print this page A4, set to 100% (not 'fit to page')

- STEP 2


To check printing is correct, ensure a credit card fits perfectly in the box below

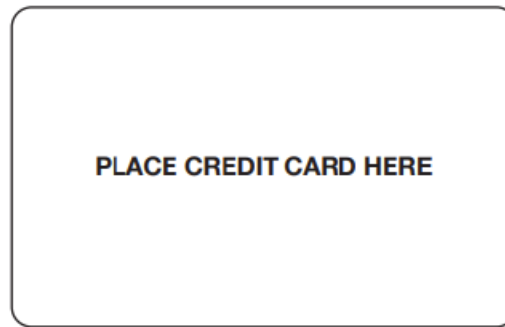

- STEP 3

Choose an existing ring that is a similar width to what you are looking to purchase. Place the place the band of your ring on the chart below and match the inside edge to the nearest size circle.

If you fall between two sizes, we suggest choosing the larger size.

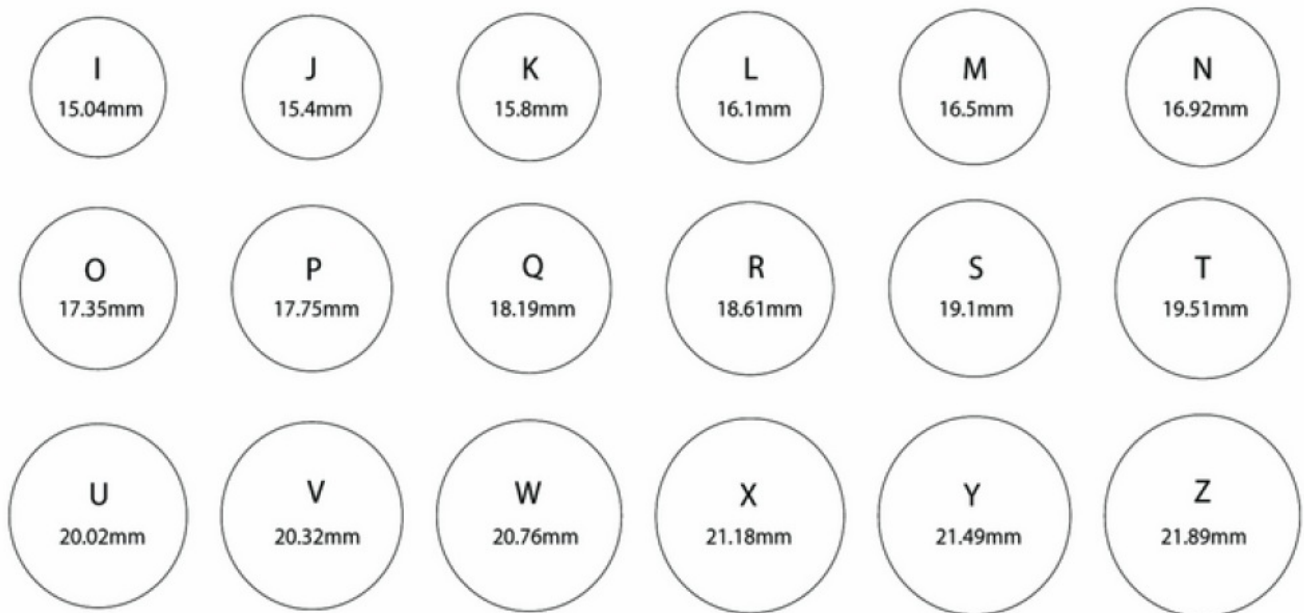

Frequently Asked Questions

- Q: How do I know if I printed the page correctly?

A: To ensure correct printing, use a credit card to check if it fits perfectly within the designated box on the page.

- Q: What if my ring size falls between two circles on the chart?

A: In such cases, it is advisable to choose the larger size for a better fit and comfort.

www.tempany.co

Documents / Resources



This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.