



# TENIO CV6317-000 Single-ended, rectangular fiber closure User Manual

[Home](#) » [TENIO](#) » TENIO CV6317-000 Single-ended, rectangular fiber closure User Manual 

## Contents

- [1 TENIO CV6317-000 Single-ended, rectangular fiber closure](#)
- [2 Product Classification](#)
  - [2.1 General Specifications](#)
- [3 Dimensions](#)
- [4 Ordering Tree](#)
  - [4.1 Material Specifications](#)
  - [4.2 Environmental Specifications](#)
- [5 Packaging and Weights](#)
- [6 Regulatory Compliance/Certifications](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)
- [8 Related Posts](#)

# TENIO

**TENIO CV6317-000 Single-ended, rectangular fiber closure**



TENIO™ Small Fiber Optic Splice Closure, Gel Cable sealing, no pre-installed trays, with test valve

- Single-ended, toolless closure for splicing feeder, access and drop cables
- Features modular building blocks that fastens installation and reduces inventory
- Gel cable sealing technology allows easy adding or removing of a wide size range of cables
- Compatible with most common cable types: e.g. loose tube, central core, ribbon fiber
- Compatible with CommScope's CWDM modules and optical splitter trays

## Product Classification

- Regional Availability EMEA | Latin America
- Product Type Single-ended, rectangular fiber closure
- Product Brand TENIO™
- Product Series TENIO

## General Specifications


- Cable Entry Drop Port Style Gel block
- Cable Entry Main Port Style Gel block
- Cable Ports Quantity, total 6 multi-out ports (30 cables)
- Cable Sealing Type Compressed gel
- Closure Sealing Type Side latch
- Closure Style Single-ended
- Color Black
- Mounting Wall
- Network Area Type Distribution | Drop
- Splice Tray Included, quantity 0

- Splices per Tray, quantity 12
- Splicing Capacity, Single Fusion, maximum 144
- Splicing Type, Supported Single fusion

### Dimensions

- Height 230 mm | 9.055 in
- Width 134 mm | 5.276 in
- Length 389 mm | 15.315 in
- Main Cable Diameter, maximum 16 mm | 0.63 in

### Ordering Tree

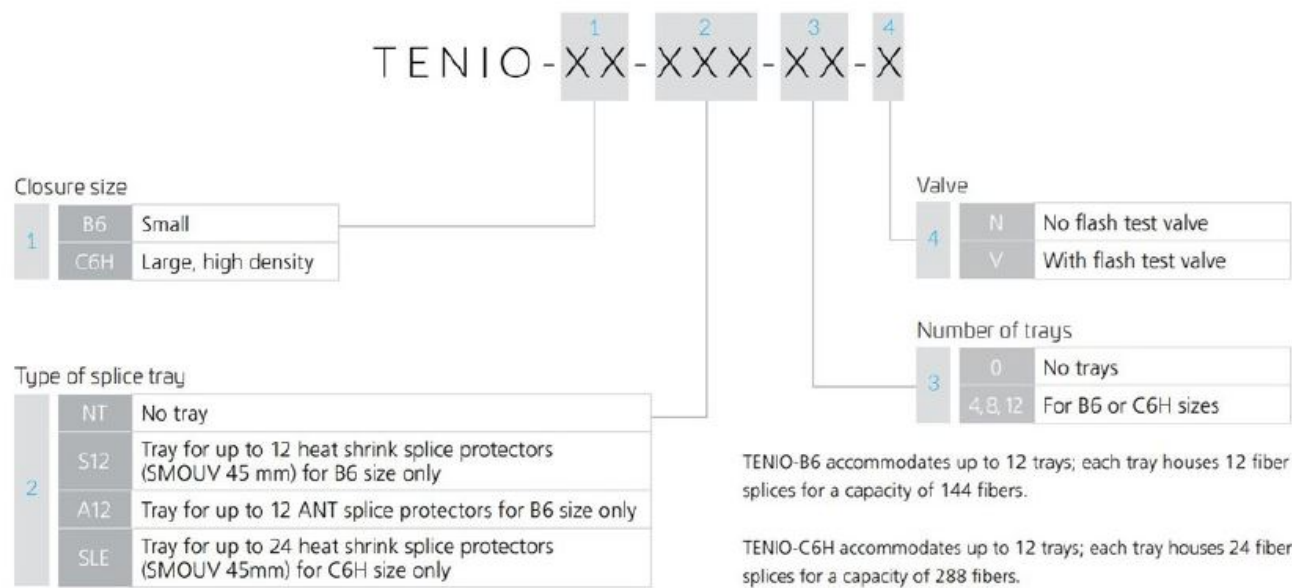

### Material Specifications

- Material Type Impact-resistant polymer

### Environmental Specifications

- Environmental Space Below ground | Buried
- Qualification Standards IEC 61300, 2 m waterhead
- Water Resistance Flash test valve at 5 psi (40 kPa)

### Packaging and Weights

- Packaging quantity 1
- Packaging Type Box | Carton
- Weight, net 1 kg | 2.205 lb


### Regulatory Compliance/Certifications

### Agency Classification

- CHINA-ROHS Below maximum concentration value
- ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system
- REACH-SVHC Compliant as per SVHC revision on [www.commscope.com/ProductCompliance](http://www.commscope.com/ProductCompliance)
- ROHS Compliant

©2022 CommScope, Inc. All rights reserved. All trademarks identified by ® or ™ are registered trademarks, respectively, of CommScope. All specifications are subject to change without notice. See [www.commscope.com](http://www.commscope.com) for the most current information. Revised: January 12, 2022

**Documents / Resources**

	<p><a href="#">TENIO CV6317-000 Single-ended, rectangular fiber closure</a> [pdf] User Manual CV6317-000, Single-ended closure, rectangular fiber, fiber closure, rectangular closure</p>
---	---

**References**

-  [CommScope | now meets next](#)
-  [Product Compliance](#)