




[Home](#) » [testo](#) » **testo 174 T BT Mini Data Logger for Temperature Instruction Manual** 

***testo 174 T BT Mini Data Logger for Temperature
Instruction Manual***



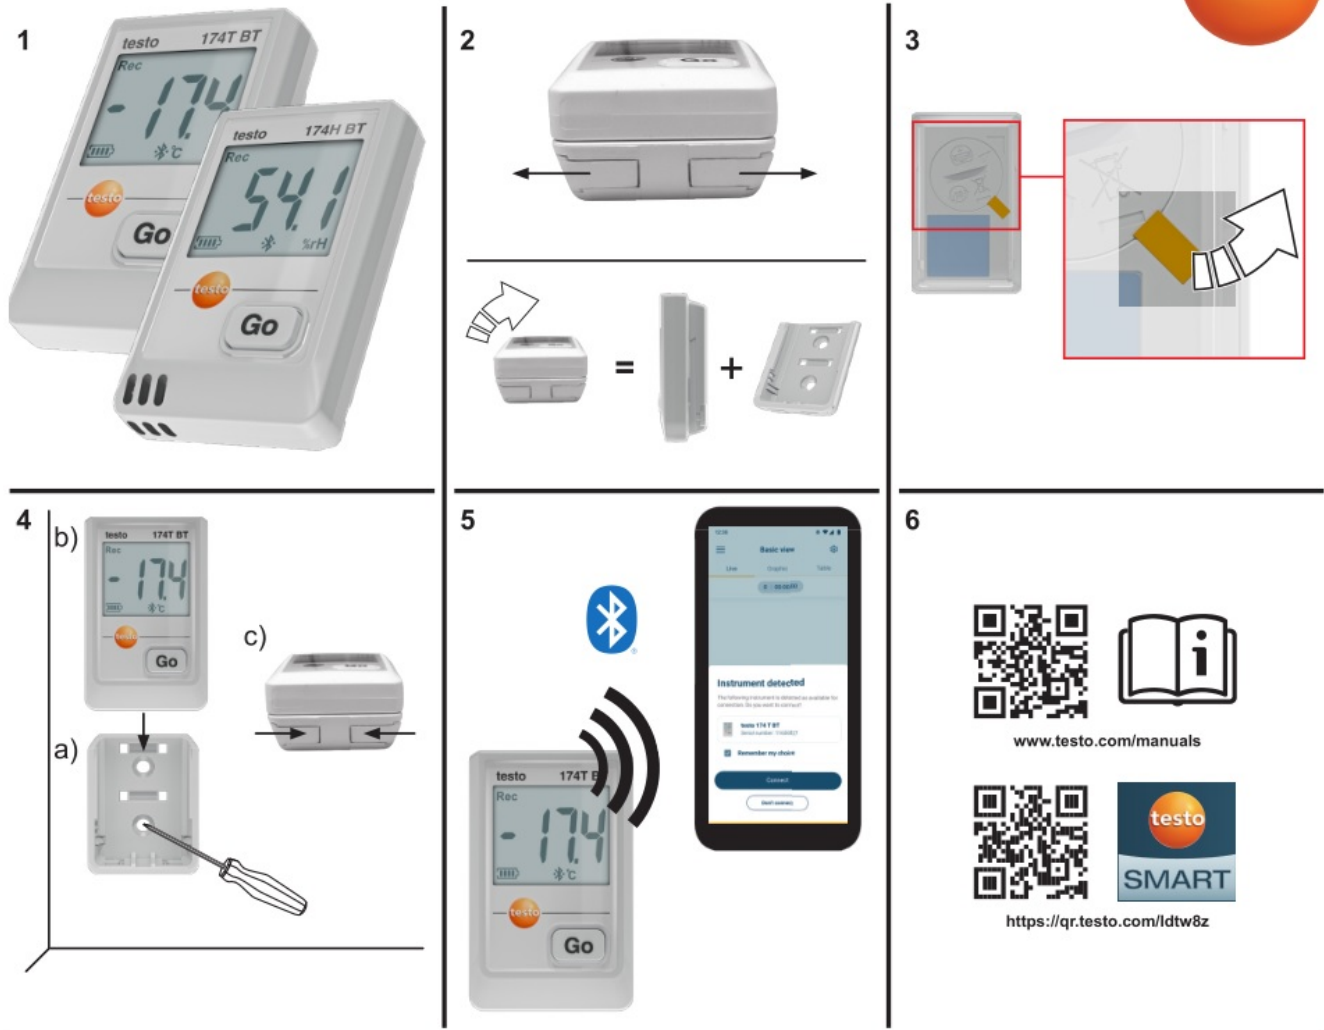




60 x 38 x 18.5 mm 2.4 x 1.5 x 0.7 in 	testo 174 T: -30 ... +70 °C -22 ... +158 °F testo 174 H: -20 ... +70 °C -4 ... +158 °F -40 ... +70 °C -40 ... +158 °F 	2x 3 V (CR 2032 Lithium) testo 174 T BT: 500 days (15 min meas. cycle, +25 °C / 77 °F) testo 174 H BT: 1 year (15 min meas. cycle, +25 °C / 77 °F)	testo 174 T BT: 0.1 °C 0.1 °F testo 174 H BT: 0.1 °C 0.1 °F 0.1 °C	testo 174 T BT: T: -30 ... +70 °C -22 ... +158 °F testo 174 H BT: -20 ... +70 °C -4 ... +158 °F (0 ... 100 % RH)	testo 174 T BT: ± 0.5 °C (-30 ... +70 °C) ± 0.5 °F (-22 ... +158 °F) testo 174 H BT: ± 0.5 °C (-20 ... +70 °C) ± 0.5 °F (4 ... +158 °F) ±3 % RH (2 % RH ... 98 % RH) @ 25 °C ± 0.03 % RH/K ± 1 digit	35 g 1.2 oz testo 174 T BT: IP 65 testo 174 H BT: IP 20	







www.testo.com/manuals

<https://qr.testo.com/ldtw8z>

Product	testo 174 T BT testo 174 H BT
Model	0572 1742 0572 1743
Mat.-No.	0572 1742 01 0572 1743 01
Date	17.10.2024

 The use of the wireless module is subject to the regulations and stipulations of the respective country of use, and the module may only be used in countries for which a country certification has been granted. The user and every owner has the obligation to adhere to these regulations and prerequisites for use, and acknowledges that the re-sale, export, import etc. in particular in countries without wireless permits, is his responsibility.

Country	Comments
Australia	 E 1561
Canada	For testo 174 T BT: 6127B-05721742 For testo 174 H BT: 6127B-05721743 See IC Warnings
Europa + EFTA	  Hereby, Testo SE & Co. KGaA declares that the radio equipment types testo 174 T BT (0572 1742) and testo 174 H BT (0572 1743) are in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: https://www.testo.com/eu-conformity EU countries: Belgium (BE), Bulgaria (BG), Denmark (DK), Germany (DE), Estonia (EE), Finland (FI), France (FR), Greece (GR), Ireland (IE), Italy (IT), Latvia (LV), Lithuania (LT), Luxembourg (LU), Malta (MT), Netherlands (NL), Austria (AT), Poland (PL), Portugal (PT), Romania (RO), Sweden (SE), Slovakia (SK), Slovenia (SI), Spain (ES), Czech Republic (CZ), Hungary (HU), Republic of Cyprus (CY). EFTA countries: Iceland, Liechtenstein, Norway, Switzerland  WEEE Reg. no.: DE 75334352

Japan	Contains 0344 0050 BLE module  204-B00974 See Japan information	
Korea	 R-R-te2-05601405 See KCC Warning	
United Kingdom (UK)	  The UK Declaration of Conformity can be found on the testo homepage www.testo.com under the product specific downloads.	
USA	 For testo 174 T BT: WAF-05721742 For testo 174 H BT: WAF-05721743 See FCC Warnings	
Bluetooth® Information / 蓝牙信息	Feature 特征与参数	Values 数值
	Bluetooth® range / 范围	up to 30 m (98 feet) (free field / 无障碍 场地)
	Radio Type / 无线类型	Bluetooth® Low Energy (BLE)
	Company / 制造商	Testo SE & Co. KGaA testo 0344 0050
	RF Band / 射频频段	2402 – 2480 MHz
	Power output / 输出功率	< 10 dBm
Bluetooth® SIG List	Declaration ID	D068914
	Member company	Testo SE & Co. KGaA
NSF	For testo 174 T BT: 	
EN12830	For testo 174 T BT: Acc. to EN12830-S, T, 0.5 Ia	

IC Warnings

CAN ICES-003(B) / NMB-003(B)

This Class B digital apparatus complies with Canadian ICES-003.

RSS-Gen & RSS-247 statement This device contains licence-exempt

transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s).

Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Caution: Radio Frequency Radiation Exposure

The product comply with the Canada portable RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in this manual. The further RF exposure reduction can be achieved if the product can be kept as far as possible from the user body or set the device to lower output power if such function is available.

Co-Location

This device must not be co-located or operated in conjunction with any other antenna or transmitter.

FCC Warnings

Information from the FCC (Federal Communications Commission)

For your own safety

Shielded cables should be used for a composite interface. This is to ensure continued protection against radio frequency interference.

FCC warning statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or

television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Shielded interface cable must be used in order to comply with the emission limits.

Warning

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution: Radio Frequency Radiation Exposure

The device has been evaluated to meet general RF exposure requirement, The device can be used in portable exposure condition without restriction. Federal Communication Commission (FCC) Radiation Exposure Statement Power is so low that no RF exposure calculation is needed.

Co-Location


This device must not be co-located or operated in conjunction with any other antenna or transmitter.

Contents [[hide](#)]

1 Documents / Resources

1.1 References

Documents / Resources

	testo 174 T BT Mini Data Logger for Temperature [pdf] Instruction Manual 174 T BT, 174 T BT Mini Data Logger for Temperature, Mini Data Logger f or Temperature, Data Logger for Temperature, Temperature
---	---

References

- [User Manual](#)

📁 testo

🔍 174 T BT, 174 T BT Mini Data Logger for Temperature, Data Logger for Temperature, Mini Data Logger for Temperature, Temperature, testo

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.