




The Home Depot 52DB Ceiling Fan with Lights

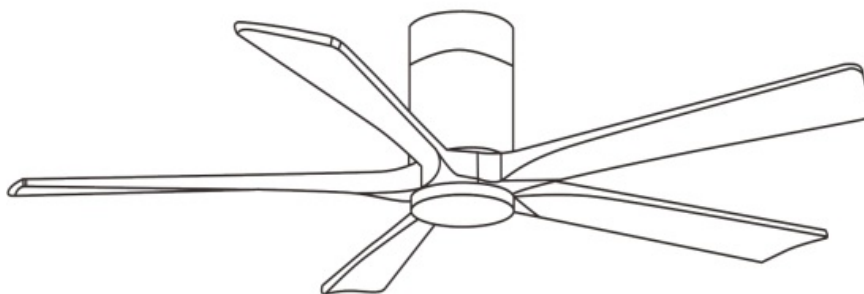

Contents [[hide](#)]

- [1 SAFTY RULES](#)
- [2 BEFORE INSTALLATION](#)
- [3 INSTALL THE FAN](#)
- [4 INSTALL THE MOUNTING BRACKET](#)
- [5 INSTALLING RECEIVER](#)
- [6 INSTALLING FAN BLADES](#)
- [7 INSTALLING LAMP](#)
- [8 OPERATING INSTRUCTIONS](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)


SAFTY RULES

1. To reduce the risk of electric shock, insure electricity has been turned off at the circuit breaker or fuse box before beginning.
2. All wiring must be in accordance with the National Electrical Code and local electrical codes. Electrical installation should be performed by a qualified licensed electrician.

3. **WARNING:** To reduce the risk of electrical shock and fire, do not use this fan with any solid-state fan speed control device.
4. **WARNING:** To reduce the risk of fire, electric shock, or personal injury, mount to outlet box marked “Acceptable for Fan Support of 45kg (99.12 lbs.) Or Less” and use mounting screws provided with the outlet box. Most outlet boxes commonly used for the support of light fixtures are not acceptable for fan support and may need to be replaced. Due to the complexity of the installation of this fan, a qualified licensed electrician is strongly recommended.
5. The outlet box and support structure must be securely mounted and capable of reliably supporting a minimum of 45KGS.
6. The fan must be mounted with a minimum of 7 feet clearance from the trailing edge of the blades to the floor.
7. Avoid placing objects in the path of the blades.
8. To avoid personal injury or damage to the fan and other items, be cautious when working around or cleaning the fan.
9. Do not use water or detergents when cleaning the fan or fan blades. A dry dust cloth or lightly dampened cloth will be suitable for most cleaning.
10. After making electrical connections, spliced conductors should be turned upward and pushed carefully up into the outlet box. The wires should be spread apart with the grounded conductor and the equipment-grounding conductor on one side of the outlet box.
11. Electrical diagrams are for reference only.
12. The fan is suitable for indoor use only.

TOOLS REQUIRED

- Phillips screwdriver



- Flat blade screwdriver



- Step ladder



- Wire stripper




- Electrical tape







BEFORE INSTALLATION


Unpack your fan and check the contents. You should have followings:



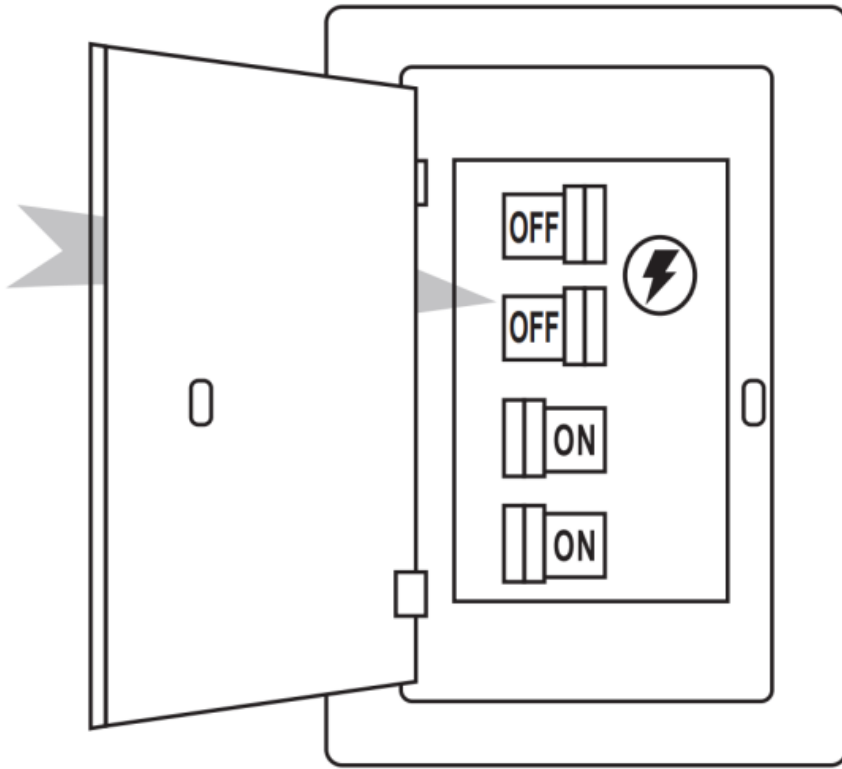


Contact a licensed electrician if you are not good at performing electrical work. It's the licensed electrician who installs the fan, if required by the local code. Do not use the fan with a dimmer switch. Turn off power at breaker.

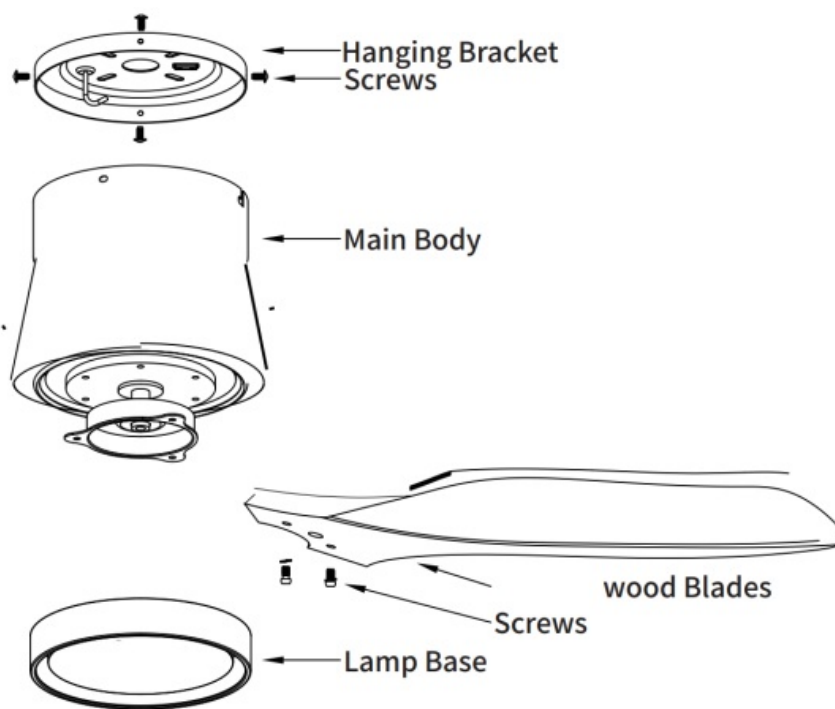

Tools and Materials Required

			
External Hexagonal Wrench	Wire Stripper	Phillips Screw drive	Step Ladder



									
1/4 * 15 screw	6	Balance sticker	2	Explosion screw	4	Gasket	6	Self-tapping screws	4

INSTALL THE FAN


Tools Required: Phillips Screwdriver, Pair of Pliers, Straight slot screwdriver, Adjustable Wrench, Step Ladder and Wire Cutters.

INSTALL THE MOUNTING BRACKET


To prevent personal injury and damage, ensure that the hanging location allows the blade a clearance of 7.5 feet (2.3 metets) from the floor and 18 inches (45.72 centimeters) from any wall or obstruction.

1. For the concrete ceiling: Mark the location for the ceiling fan first, then drill two holes

in the ceiling to aid in securing ceiling bracket with two expansion screws provided, and secure the mounting bracket to the building structure with two expansion screws provided, tighten the screws. (Fig.1)


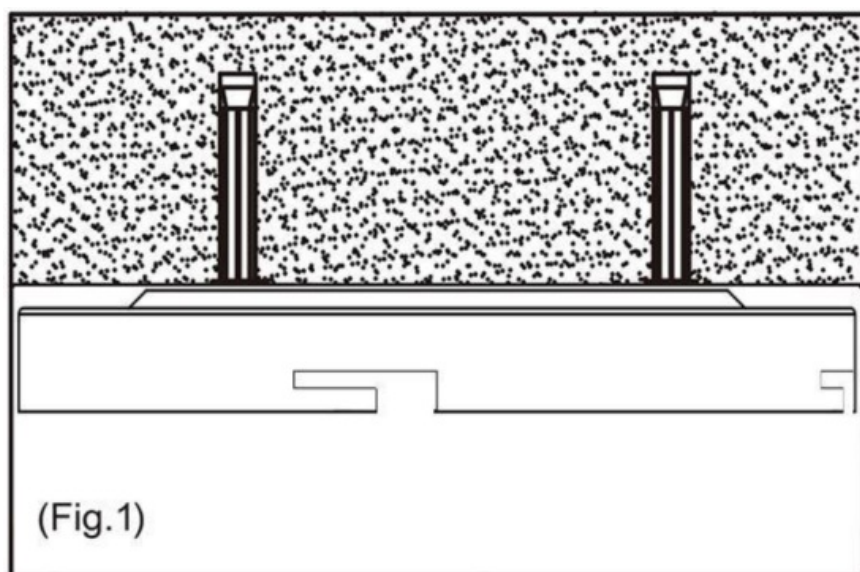


For the Wood Ceiling: Mark the location for the ceiling fan first, secure the mounting bracket to the building structure with four wood screws provided. (Fig.2)

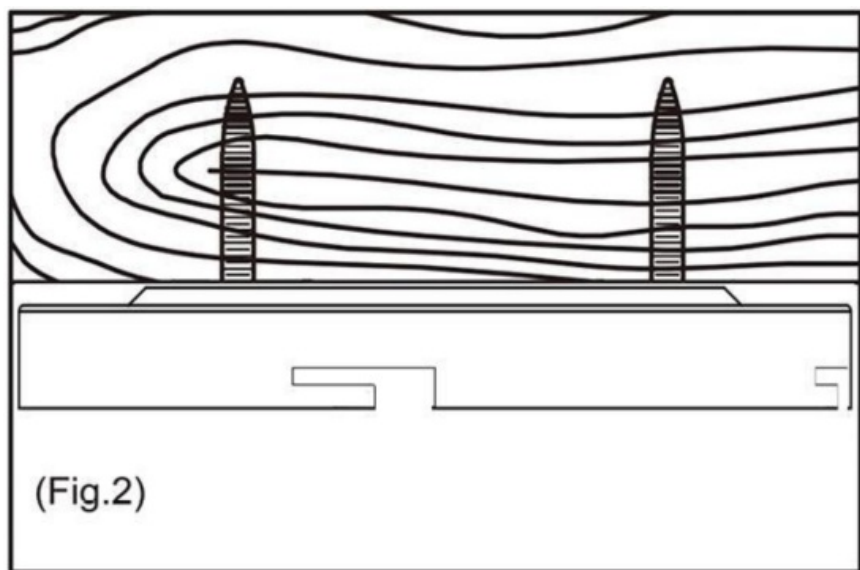


NOTE: Hanger after the installation must be able to withstand the weight of 45 kgs or more.

INSTALLING RECEIVER

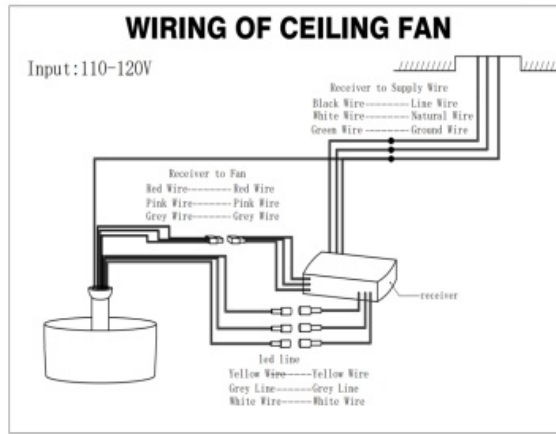

INSTALLING FAN BLADES

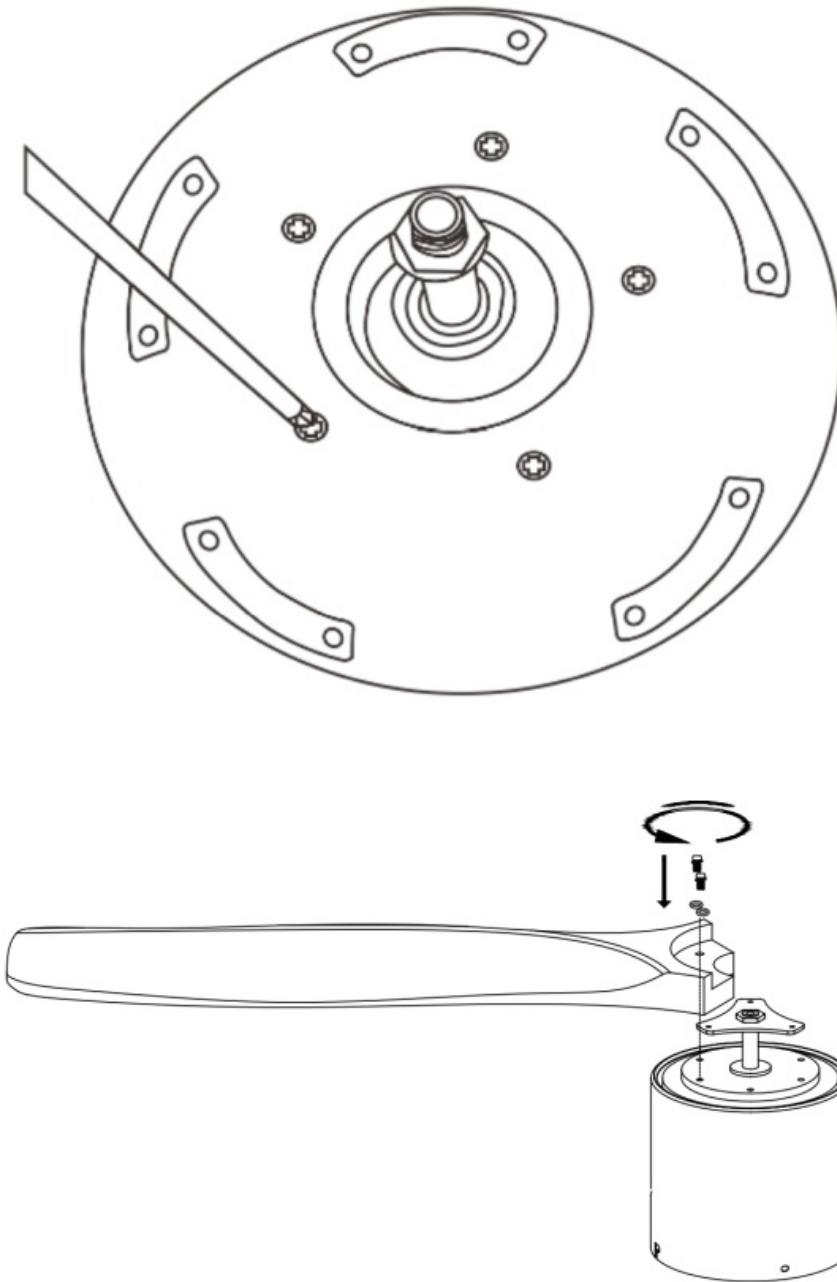


Before installing fan blades, remove the motor's fastener that is only used to protect the motor from damages in transit then install fan blades on fan's motor, align holes of blades and motor, then screw blades with provided screws.


Please confirm that all blades are in correct places and tightly screwed.

Install the accessory large iron plate onto the motor,

INSTALLING LAMP

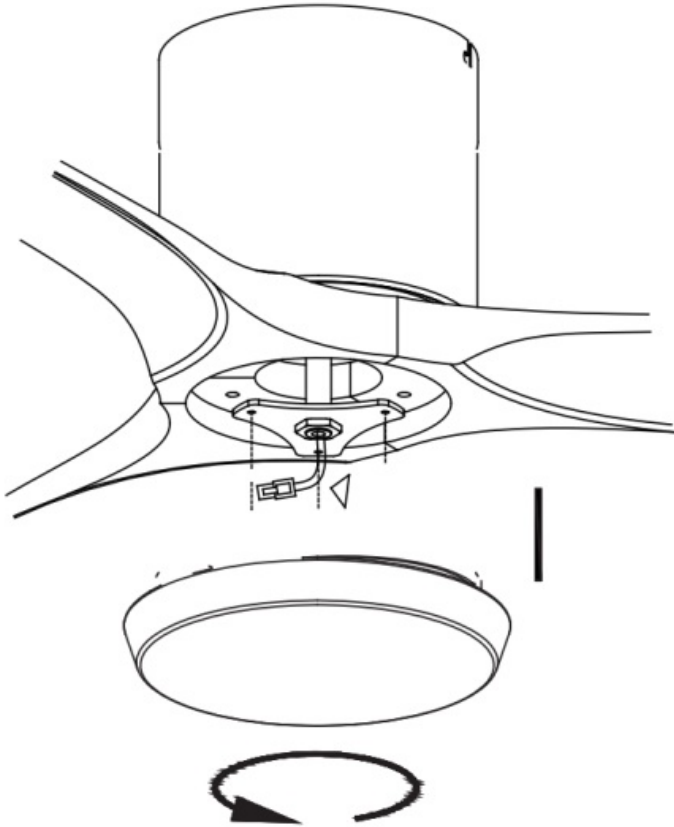


OPERATING INSTRUCTIONS

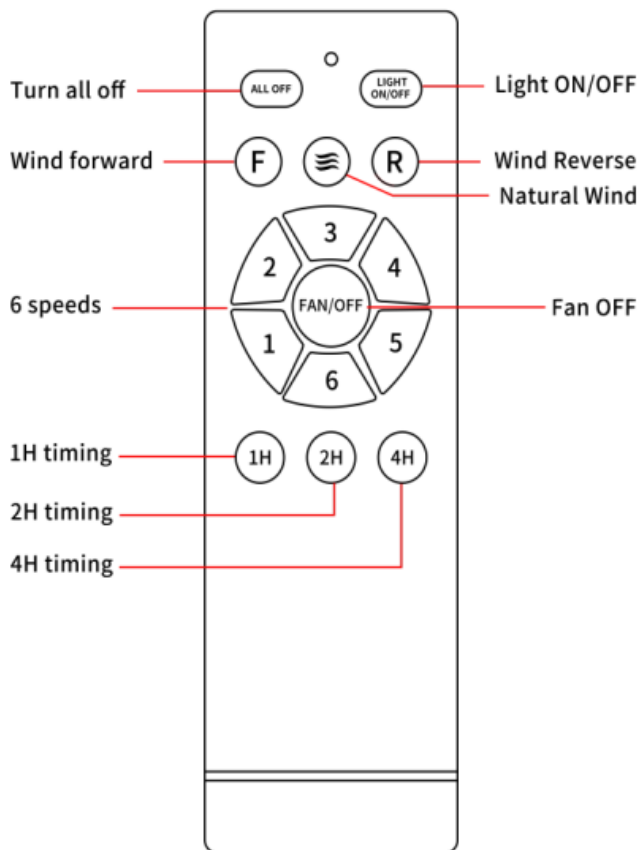

Using AAA 1.5V x2 battery

When the remote control cannot control the fan light, you can use the following method to code: first turn off the power switch (wall or main switch), then turn it back on after 10 seconds. Once you see the light on, immediately press and hold the “FAN OFF” button on the remote control for 5 seconds to start the fan.

Documents / Resources

	The Home Depot 52DB Ceiling Fan with Lights [pdf] Installation Guide 52DB, 52DB Ceiling Fan with Lights, Ceiling Fan with Lights, Fan with Lights, Lights
---	--

References

- [User Manual](#)

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.