



THULE Omnistor 5200 Wall Mounted Range Awning Instructions

[Home](#) » [THULE](#) 




Thule Omnistor 5200
Instructions



Omnistor 5200


Contents

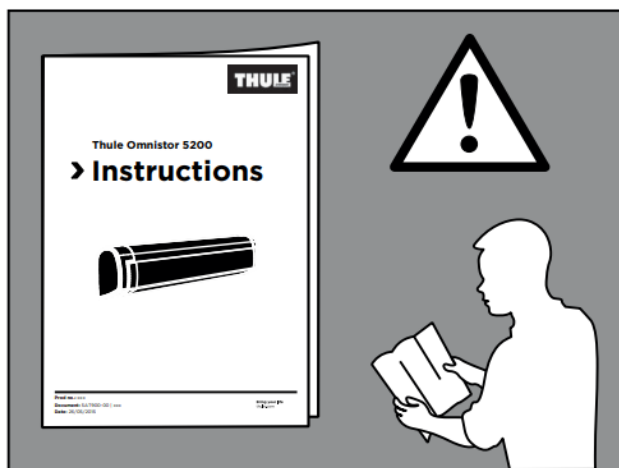


- [1 Omnistor 5200 Wall Mounted Range Awning](#)
- [2 INSTALLATION](#)
- [3 USER MANUAL](#)
- [4 Warranty](#)
- [5 General remarks](#)
- [6 OPTION](#)
- [7 THULE TENTS](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)






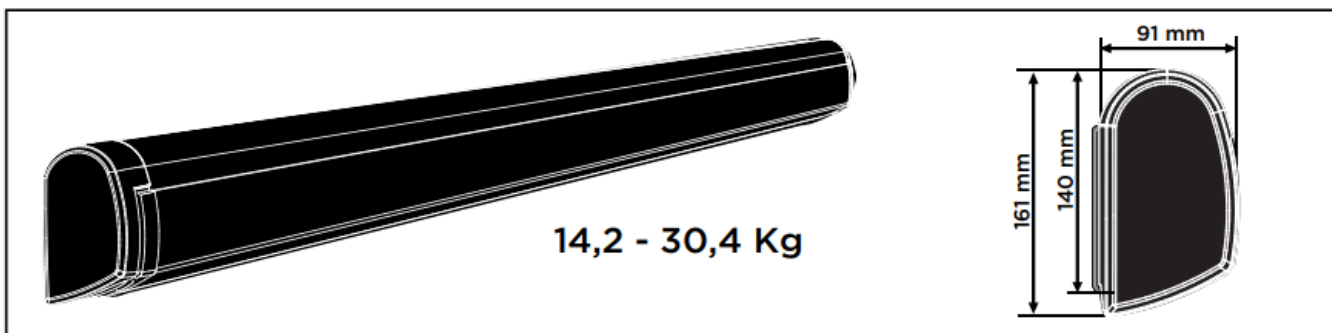


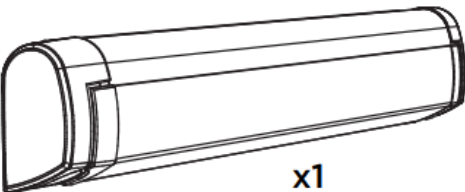











Prod no.: xxx
 Document: 5AT900-00 | xxx
 Date: 26/05/2015

<http://tiny.cc/31xyxx>














| | | | | | | | | |
|---------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|
|  | | | | | | | | |
| x1 | | | | | | | | |
|  | | | | | | | | |
| x1 | | | | | | | | |
|  | | | | | | | | |
| x1 | | | | | | | | |

| | 1,9m | 2,3m | 2,6m | 3,0m | 3,5m | 4,0m | 4,5m | 5,0m |
|-------------------------------------------------------------------------------------|------|------|------|------|------|------|------|------|
|  | x1 | x1 | x1 | x1 | x1 | x2 | | |
|  | x2 | x2 | x2 | x2 | | | x1 | x1 |
|  | | | | | x2 | x2 | | |
|  | | | | | | | x2 | x2 |
|  | x3 | x3 | x3 | x3 | x3 | x4 | x4 | x4 |
|  | x2 | x2 | x2 | x2 | x2 | x2 | x3 | x3 |
|  | x2 | x2 | x2 | x2 | x2 | x2 | x2 | x2 |
|  | x5 | x5 | x5 | x5 | x5 | x6 | x8 | x8 |
|  | x4 | x4 | x4 | x4 | x4 | x4 | x4 | x4 |
|  | x4 | x4 | x4 | x4 | x4 | x4 | x4 | x4 |



| | 1,9m | 2,3m | 2,6m | 3,0m | 3,5m | 4,0m | 4,5m | 5,0m |
|-------------------------------------------------------------------------------------|------|------|------|------|------|------|------|------|
|  | x5 | x5 | x5 | x5 | x5 | x5 | x5 | x5 |
|  | x7 | x7 | x7 | x7 | x7 | x7 | x8 | x10 |
|  | x7 | x7 | x7 | x7 | x7 | x7 | x8 | x10 |
|  | x4 | x4 | x4 | x4 | x4 | x4 | x4 | x4 |
|  | x4 | x4 | x4 | x4 | x4 | x4 | x4 | x4 |
|  | x4 | x4 | x4 | x4 | x4 | x4 | x4 | x4 |
|  | x2 | x2 | x2 | x2 | x2 | x2 | x2 | x2 |
|  | x2 | x2 | x2 | x2 | x2 | x2 | x2 | x2 |




INSTALLATION

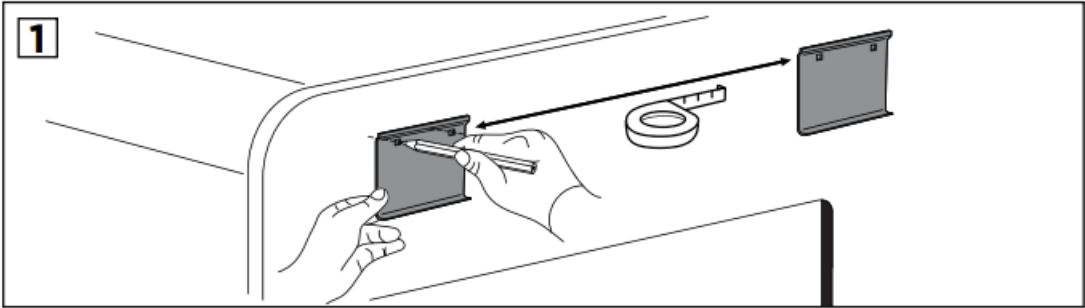



| | |
|--------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| FIX A or B (See P4.)  |  |
| FIX A or B (See P4.)  |  |
| FIX A or C (See P4.)  |  |
| FIX A or C (See P4.)  |  |
| FIX A or C (See P4.)  |  |

*More installation options? Ask your dealer for more information.


| | | |
|-------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| THULE recommends: |  | Prepare SIKA Activator or Körabond HG83 Glue SIKA 252 or Aerostat MS937 |
| |  | Dry 24h |

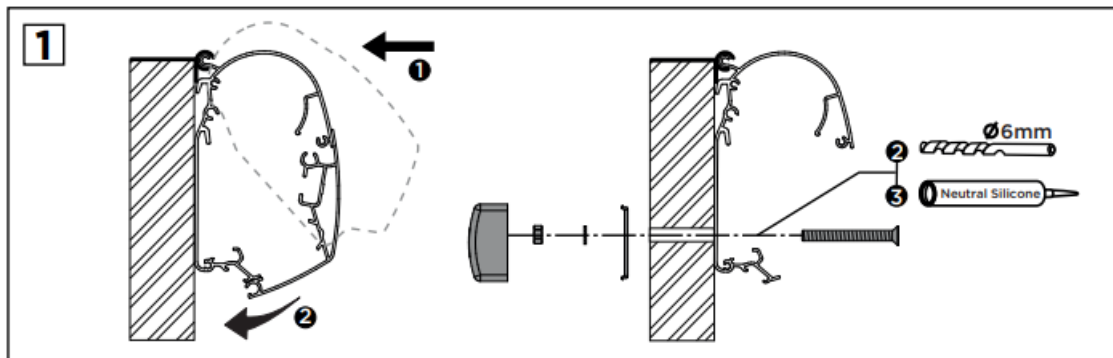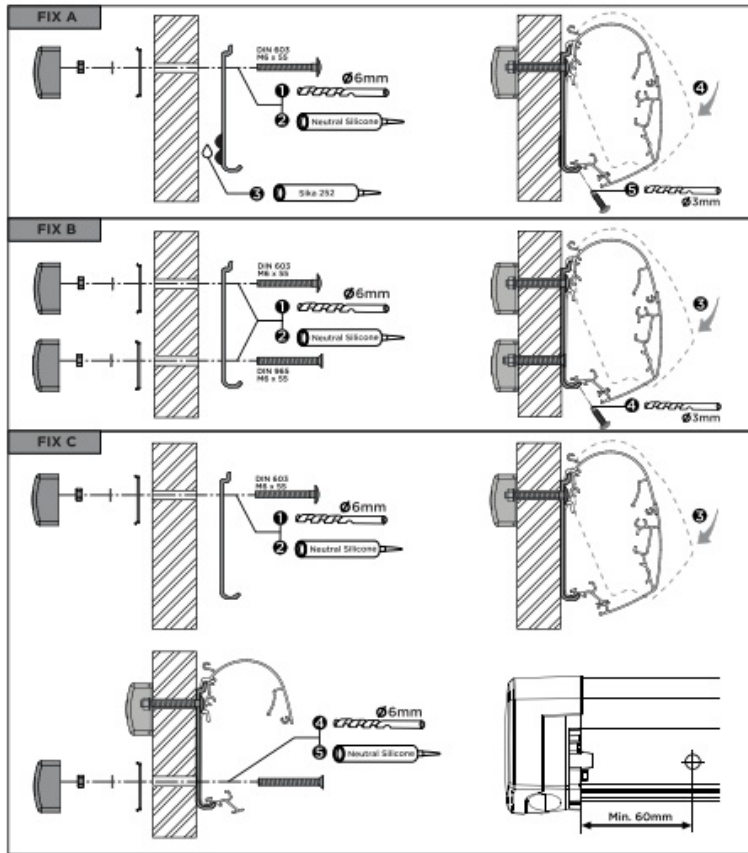
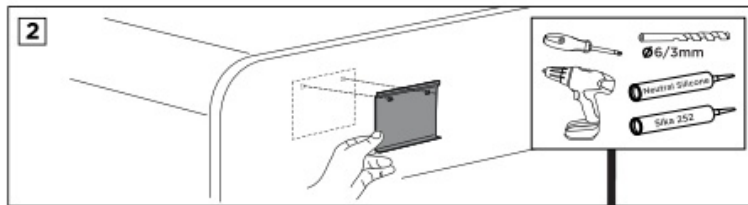


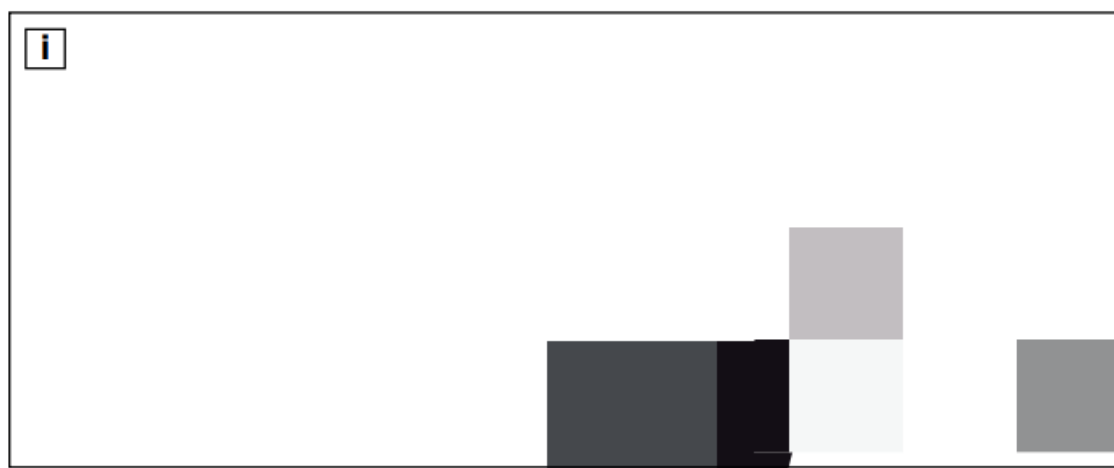

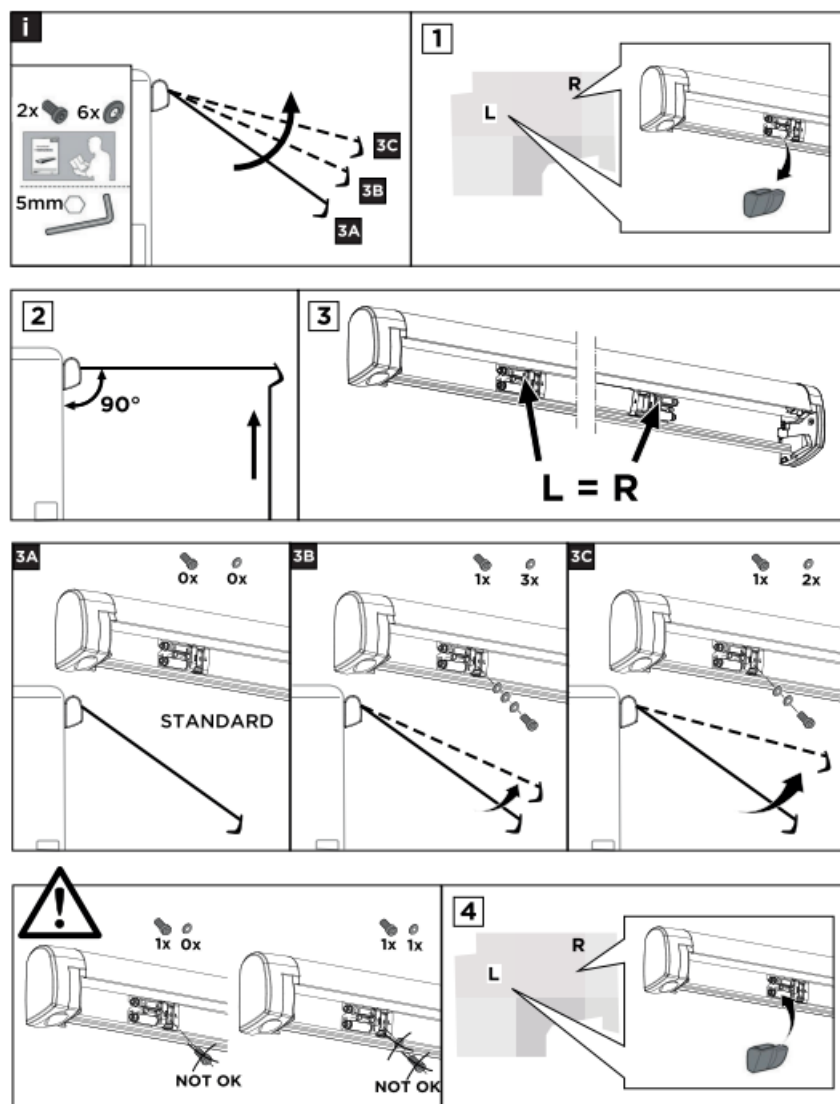


USER MANUAL

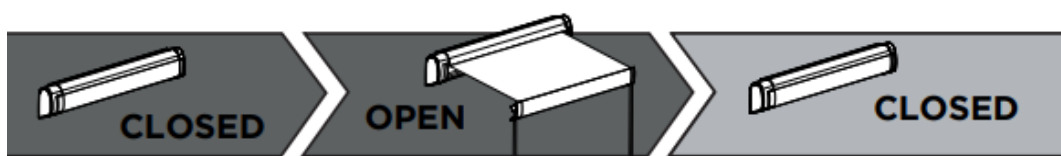



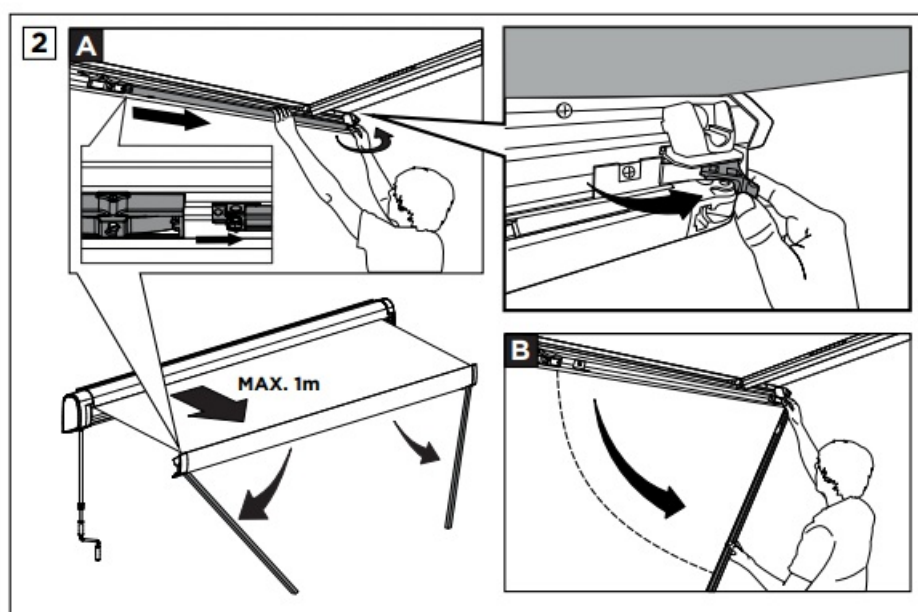
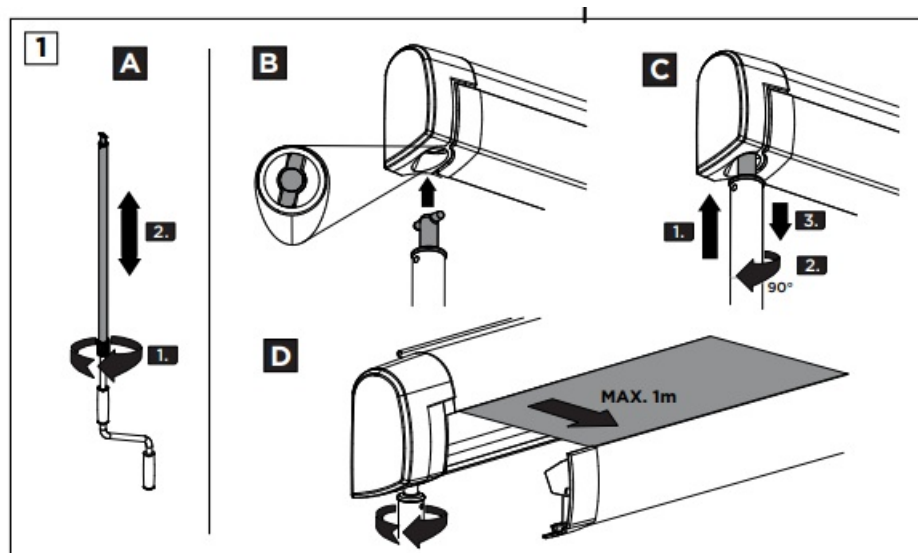


3

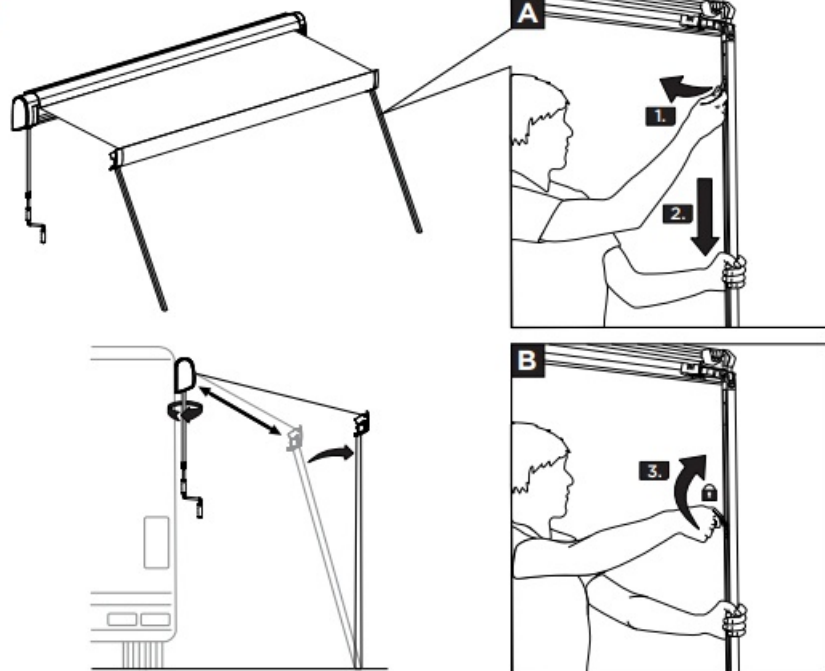


4




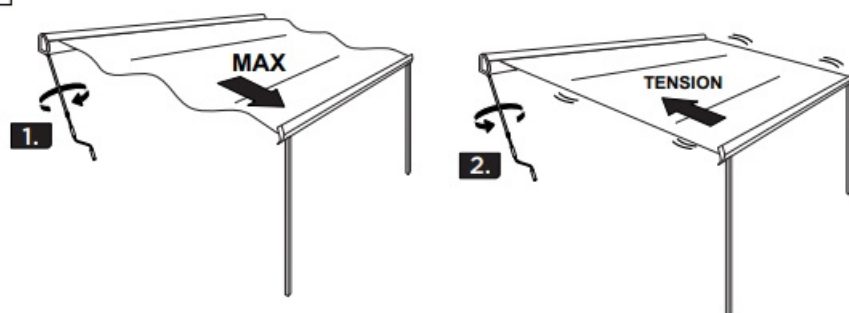


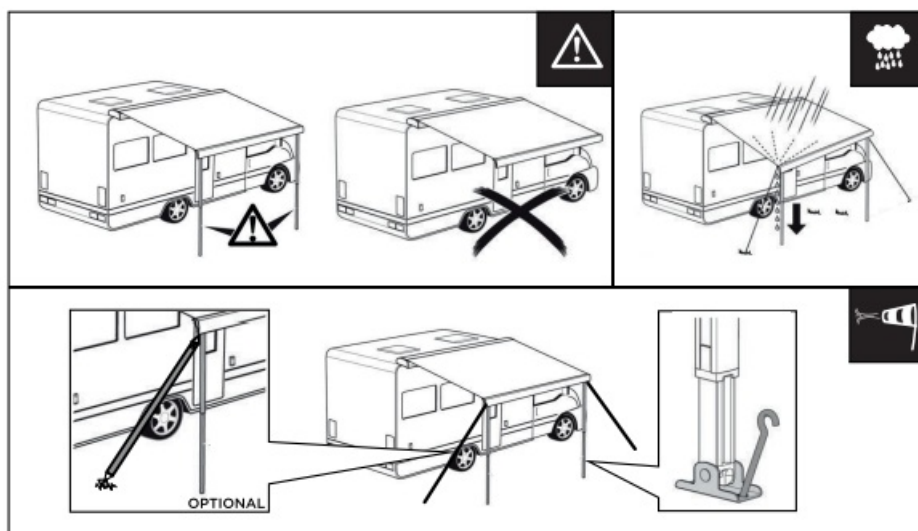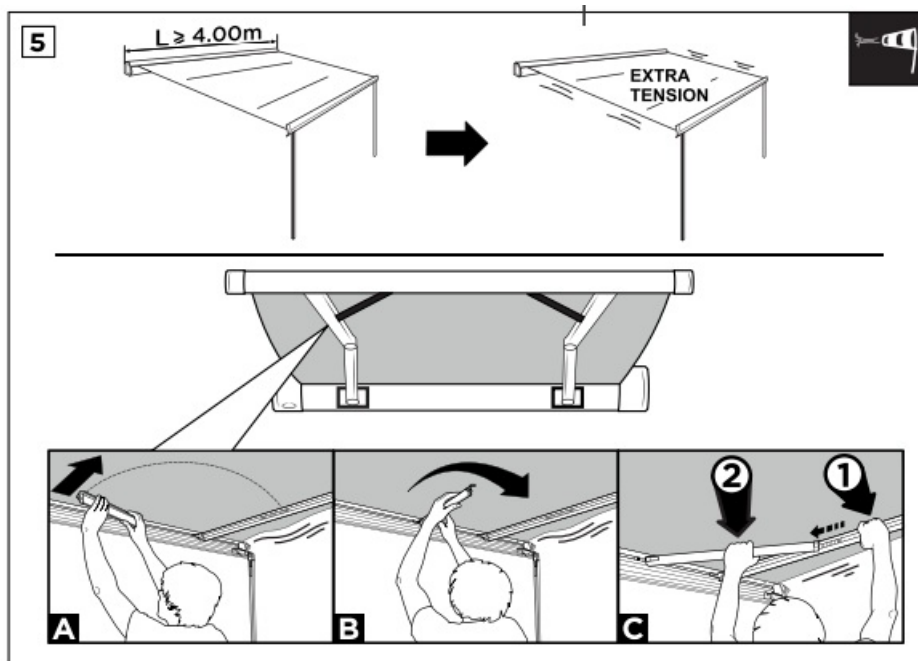


1

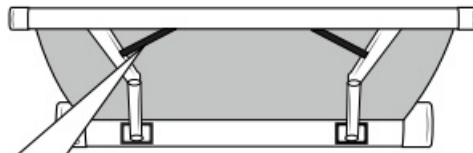

2

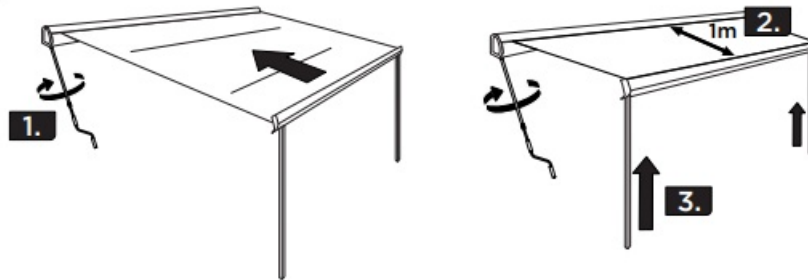

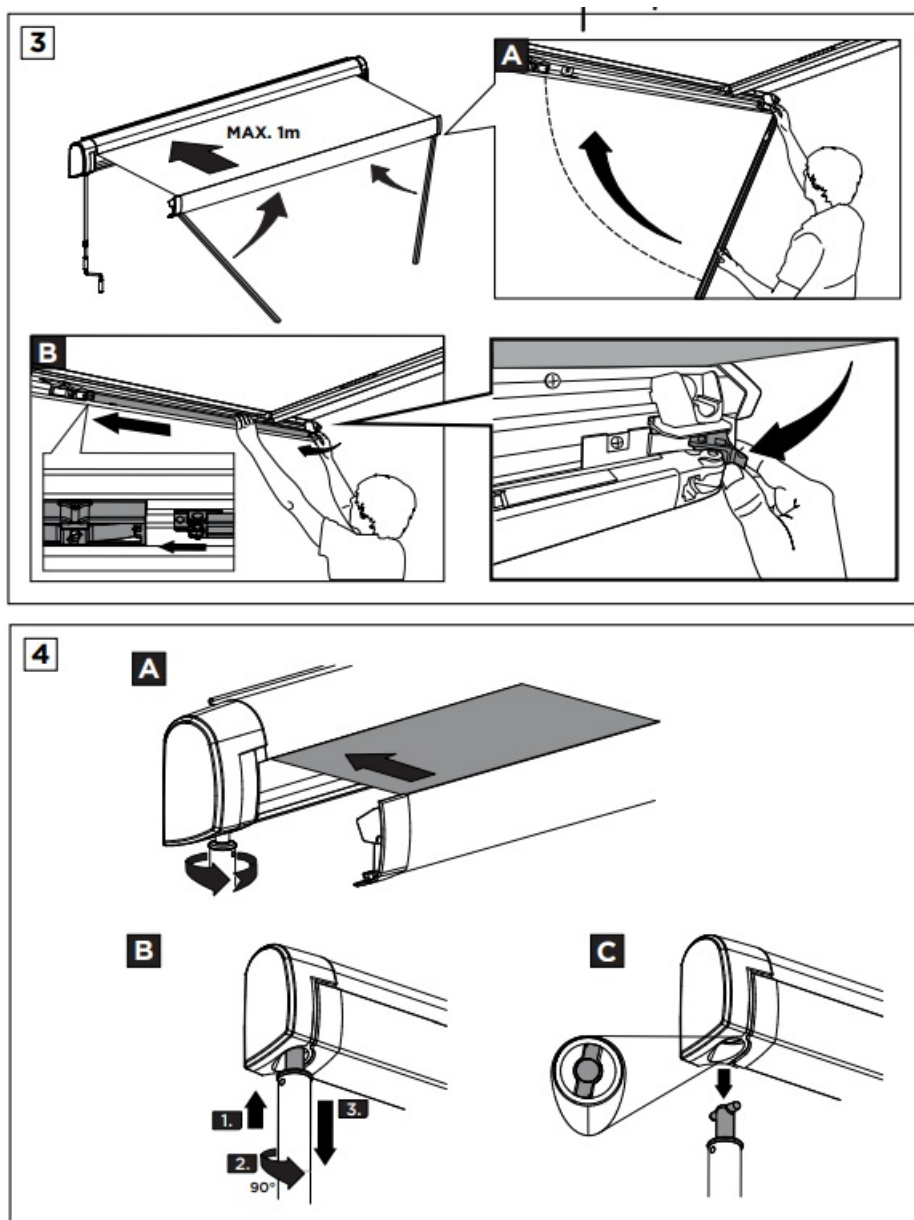

Warranty

- The warranty for the Thule Omnistor awning to the original buyer is two years from date of invoice.
- The warranty covers replacement of parts arising from defects and from the inability of the awning to perform its intended function.
- In case of a defect, consult your dealer with original invoice.
- Defects, which in our judgment occur from misuse, negligence or accident, are not covered by the warranty. In addition, the warranty does not apply if the product is installed or handled improperly or if the awning has been altered in any way or has been repaired by unqualified persons, or if the serial number and/or date has been altered or removed.
- Should the original buyer wish to return to us parts believed to be defective, the parts should be sent prepaid. If we find the parts defective and covered by warranty, they will be repaired and returned. If warranty does not apply or has expired, a nominal charge will be made. Any transport costs are for the owner's account.
- Returned goods should be in solid wrapping.
- No other warranty is given and no representative is authorised to give any warranty or assume liability by words or action under any warranty other than that is contained herein.

This warranty is expressly in lieu of any other expressed or implied warranty of whatever nature and expressly excludes any other or further liability.





General remarks

- Installation must be carried out by a qualified person.
- Check if you have a solid back ground for installation of the adapters of the awning. Fixation must be carried out by bolts and nuts and counter plate and by preference also cleaved with SIKI 252. Contact your dealer or manufacturer of the vehicle. Before drilling, be sure that there is no obstacle at the inside (for example electric cables, gas pipes and so on).
- The adapters must support the awning at the awnings spring arms for a correct and stable mounting. When this is not possible use a full length adapter.
- In order to get a watertight installation, use acid free silicone or SIKI 252 to fill up the drilled holes.
- In order not to damage the fabric when drilling the box, unroll the awning completely and put the support arms so that the fabric is horizontal.
- For the mounting height of the bottom mounting brackets ask your dealer or manufacturer.
- An awning is a sun and not an all-weather protection.


The awning should be closed in case of storm, snow or heavy rain fall (avoid formation of a water pocket).

OPTION


THULE AWNING ACCESSORIES
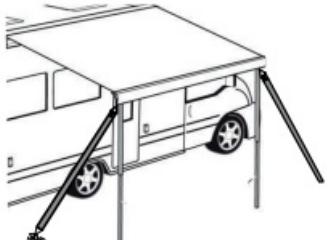
| | |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Thule Quick Tension | Thule Tent Rail 5200 |
|  |  |
| Thule hold down side strap kit | Thule 3rd Support Leg |
|  |  |

Thule Omnicleaner

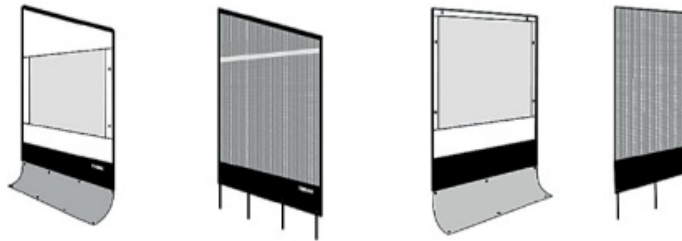

THULE TENTS

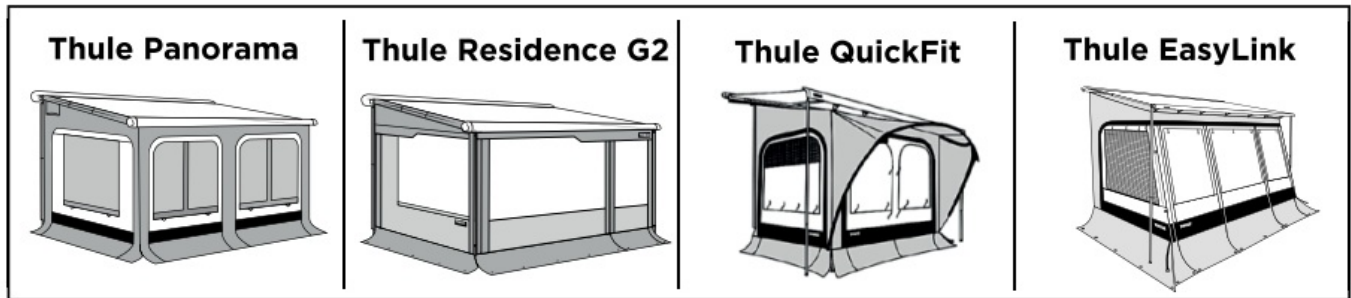

Thule NV, Kortrijkstraat 343 – BE 8930 Menen, BELGIUM



infoRV@thule.com



www.thule.com

5AT900-03

Prod no.: 301XXX

Doc. no.: 5AT900-03 / 3380038700


Date: 01/09/2020

Bring your life

thule.com

More information <https://www.caravansplus.com.au>

Documents / Resources

| | |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p>THULE Omnistor 5200 Wall Mounted Range Awning [pdf] Instructions</p> <p>Omnistor 5200 Wall Mounted Range Awning, Omnistor 5200, Wall Mounted Range Awning, Mounted Range Awning, Range Awning, Awning</p> |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

References

-  [Caravan Accessories - CaravansPlus. Delivered Fast Australia](#)