



# Tigo TS4-A-O Module Level PV Optimizer Instruction Manual

[Home](#) » [Tigo](#) » Tigo TS4-A-O Module Level PV Optimizer Instruction Manual 

Tigo TS4-A-O Module Level PV Optimizer Instruction Manual



## Contents

- [1 Product Information](#)
- [2 Included Features](#)
- [3 Easy Installation](#)
- [4 Smart Commissioning](#)
- [5 TS4-A-O SPECIFICATIONS](#)
- [6 ORDERING INFORMATION](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)
- [8 Related Posts](#)

## Product Information

The TS4-A-O (Optimization) is the advanced add-on optimization solution that brings smart module functionality to standard PV modules for higher reliability. Improve energy efficiency by upgrading underperforming PV systems or adding smart features to new installations.

The TS4-A-O complies with NEC 2017 and 2020 690.12 Rapid Shutdown specifications when installed on each module and accompanied by the Tigo Access Point (TAP) and the Cloud Connect Advanced (CCA). Module-level DC production data, as well as data from other Modbus connected devices, can be analyzed via Tigo's Energy Intelligence Software when connected to the cloud.

The TS4-A-O with UHD-Core technology and expanded specifications supports PV modules up to 700W, and 15A.

## Included Features



Module-level **optimization** for increased energy yield and greater design flexibility



Manual or automatic module-level **shutdown**. Complies with NEC 2017 and 2020.



Module-level **monitoring** for energy production tracking and system management

## Easy Installation

Snap to standard module frame or remove clips for rack mounting

## Smart Commissioning

Configure and commission with your Android or iOS mobile device


## TS4-A-O SPECIFICATIONS

<b>Environmental</b>	
Operating Temperature Range	40°C to +70°C (-40°F to +158°F)
Outdoor Rating	IP68, NEMA 3R
Maximum Elevation	2000m
<b>Mechanical</b>	
Dimensions	W=138.4mm, L= 139.7mm, H= 22.9mm
Weight	520g
<b>Electrical</b>	
Max Input Voltage (VOC @ Lowest Temperature)	80V
Input Voltage Range	16 – 80V*
Maximum Cont. Current (Imax)	15A
Maximum Short Circuit Current (Isc)	20A
Maximum Power	700W
Cable Length (in/out)	0.12/1.2m (standard), 0.62/1.2m (optional)
Connectors	MC4 (standard), EVO2 (optional)
Communication Type	Wireless
Recommended Fuse Rating	30A
Rapid Shutdown Time Limit	30 secs or less**
PVRSE Controlled Conductors	≤30 Vdc, ≤240VA, ≤8A**


TAP required for module-level shutdown and CCA required for monitoring with TS4-A-O.

\*VMOD MAX of the connected panel = TS4-A-O VDCU MAX

\*\*Limits are based on NEC 690.12 rapid shutdown requirements.

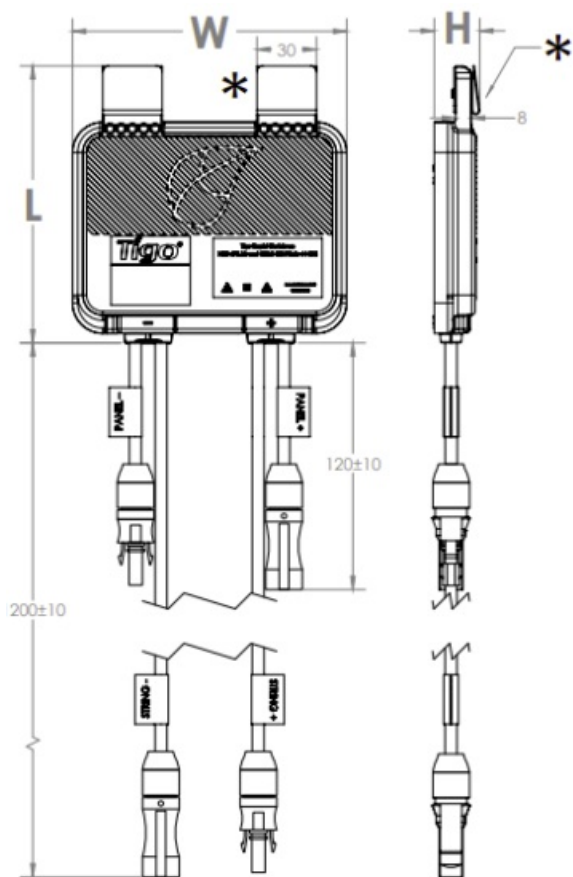

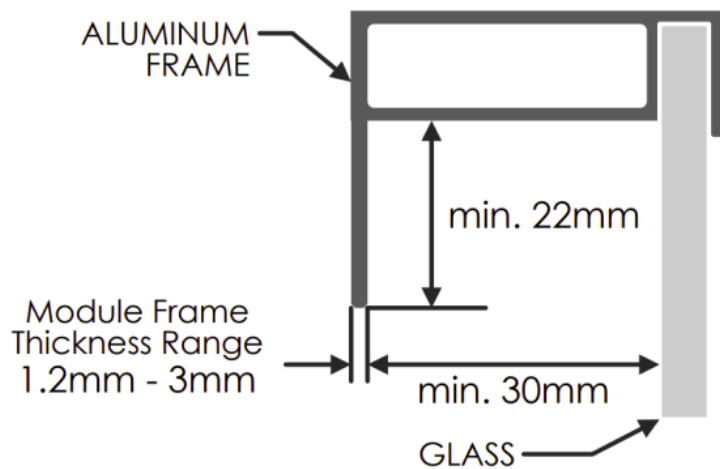

\*Clips can be removed for rack mounting



Module frame specifications for mounting TS4-A

## ORDERING INFORMATION

Standard	Description
461-00252-32	15A, 700W, 1500VUL/1000V IEC, 1.2M Cable, MC4
Options	Description
461-00252-62	15A, 700W, 1500VUL/1000V IEC, 0.62/1.2M Cable, MC4
461-00261-62	15A, 700W, 1500VUL/IEC, 0.62/1.2M Cable, EVO2
461-00261-32	15A, 700W, 1500VUL/IEC, 1.2M Cable, EVO2

	EN 62109-1	
	<a href="http://www.tuv.com">www.tuv.com</a> ID 0007000000	

For sales info:

[sales@tigoenergy.com](mailto:sales@tigoenergy.com)

For product info:

Visit : [tigoenergy.com/products](http://tigoenergy.com/products)

For technical info:

Visit : [support.tigoenergy.com](http://support.tigoenergy.com)

For additional info and product selection assistance, use Tigo's online design tool at [tigoenergy.com/design](http://tigoenergy.com/design)




Downloads

Tigo Energy, Inc. | [www.tigoenergy.com](http://www.tigoenergy.com) | [sales@tigoenergy.com](mailto:sales@tigoenergy.com)



**Tigo**<sup>®</sup>

## Documents / Resources

	<p><a href="#">Tigo TS4-A-O Module Level PV Optimizer</a> [pdf] Instruction Manual            TS4-A-O Module Level PV Optimizer, TS4-A-O, Module Level PV Optimizer, Level PV Optimizer , PV Optimizer</p>
---	--

## References

-  [Product Selection Tool | Tigo Energy](#)

-  [TS4 Flex MLPE | Tigo Energy](#)
-  [Intelligent Solar Energy Systems | Tigo Energy](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.