



TinySine AudioB I2S Bluetooth Digital Audio Receiver Module User Manual

[Home](#) » [TinySine](#) » TinySine AudioB I2S Bluetooth Digital Audio Receiver Module User Manual 

TinySine AudioB I2S Bluetooth Digital Audio Receiver Module



Contents

- [1 Features](#)
- [2 Applications](#)
- [3 Description](#)
- [4 Pin Functions](#)
- [5 Bluetooth programming](#)
- [6 Typical Application](#)
- [7 Dimensions](#)
- [8 FCC Statement](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)
- [10 Related Posts](#)

Features

- Bluetooth 5.1
- 12S digital output
- Sampling Rate: 48KHz
- Bit per Sample: 16 bit
- Left Justified
- Justified Data 1 bit delay
- Apt-X supported
- Low power consumption: 5mA@5V
- HFP V1.6
- HSP V1.2
- A2DP V1.2
- AVRCP v1.4
- Support for smartphone application(APPs)

Applications


- Personal computer
- Background music system
- Musical instrument amplifiers
- Home DIY
- Car audio

Description

If you want to build a digital Bluetooth amplifier board, AudioB I2S Bluetooth audio receiver module is a good choice for your project. This is a Bluetooth 5.0 stereo receiver module, I2S digital output and music resampling frequency is 48KHz. It supports Apt-X supported, and it is based on QCC3031. We breakout pins to 2×10 2mm space male pins. You can integrate it to your project easily. This module has a U.FL connector. You can connect an external 2.4G antenna with it by using a U.FL to SMA cable.

Pin Functions

PIN#		NAME	DIRECTION	DESCRIPTION	
1		Linein A N	Analog in	Line input negative, Channel A	
2		Linein A P	Analog in	Line input positive. Channel A	
3		Linein BP	Analog in	Line input positive, Channel B	
4		linein 8 N	Analog in	I ine input negative, Channel B	
5		AUX DI: I	Digital input	Aux in/line in enable	
6		GND		Ground	
7		GND	–	Ground	
-8	– 9 – –	12S BCK	–	12S synchronous data dock 12S synchronous data output 12S word select	–
–		12S S OIJT			
–		–			
10		12S LRCK	–		
11		Vin	–	Voltage input (+3. N – 5.5V)	
12		MICBIAS	Analog output	Microphone bias output	
13		LED	Analog output	LED anode 3.3V	
14		LEO-	Digit I o tp t	LEDcontrol pin	
15		13.3V	Digital output	3.3V output	
16		GND	–	Ground	
17		FORWARD	Digital input	Next track Nolume+	
18		REWIND	Digital input	Previous track Nolume-	
19	– .	PLAY/ PAUSE	Digital input	-Play/Pause	
20		MUTE	Digit I o tpu	Mute control	

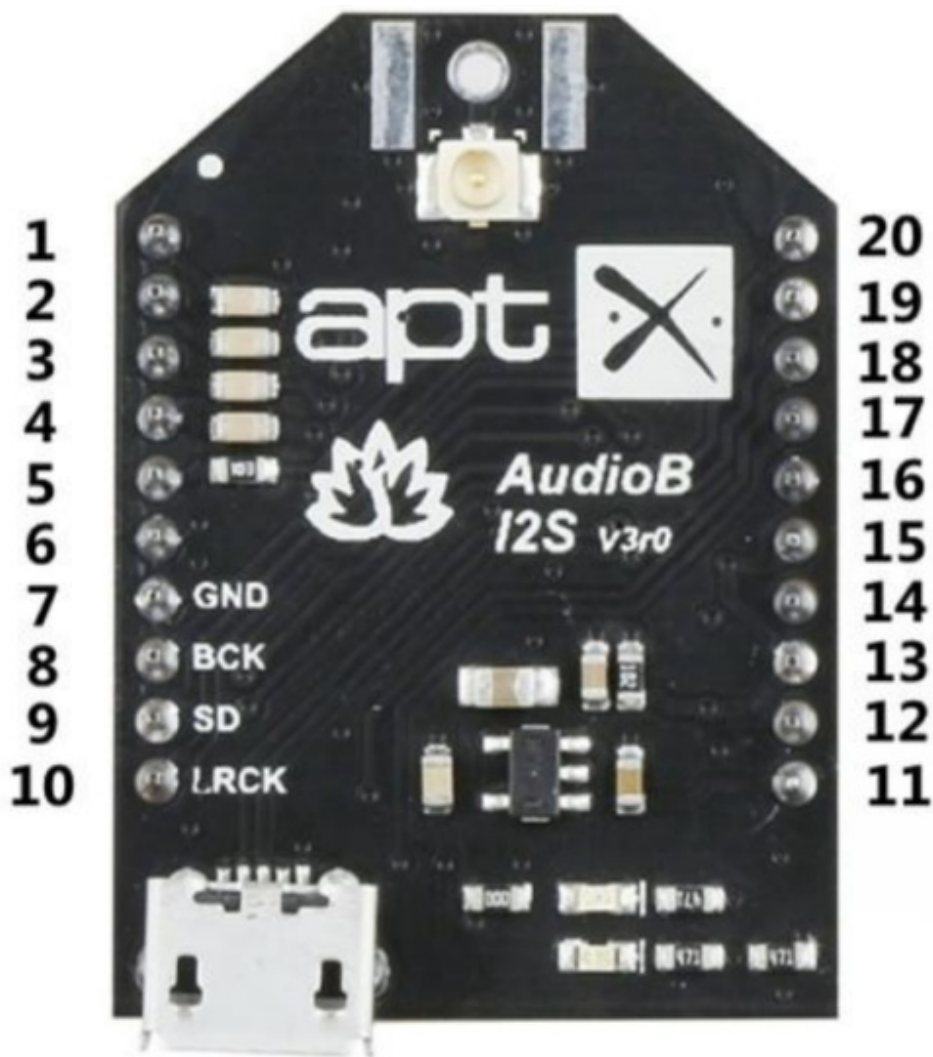

Bluetooth programming


AudioB I2S has a microUSB port, you can do the programming via the USB port. You can change the BT name, Audio tones, Firmware ect... by using the official Qualcomm software.

Typical Application



AudioB I2S can work with Tinsine audio amplifier board which supports I2S input, you can also use it with your audio amplifier board, following picture shows the typical application of this module.

The module PIN7, 8, 9, 10 are I2S output pins, I2S voltage is 3.3V.

- 7 – GND
- 8 – BCK I2S synchronous data clock, It's a 2.304MHz square wave signal.
- 9 – SD I2S synchronous data output.
- 10 – LRCK I2S word select, 48KHz. 1 – Left channel data, 0 – Right channel data

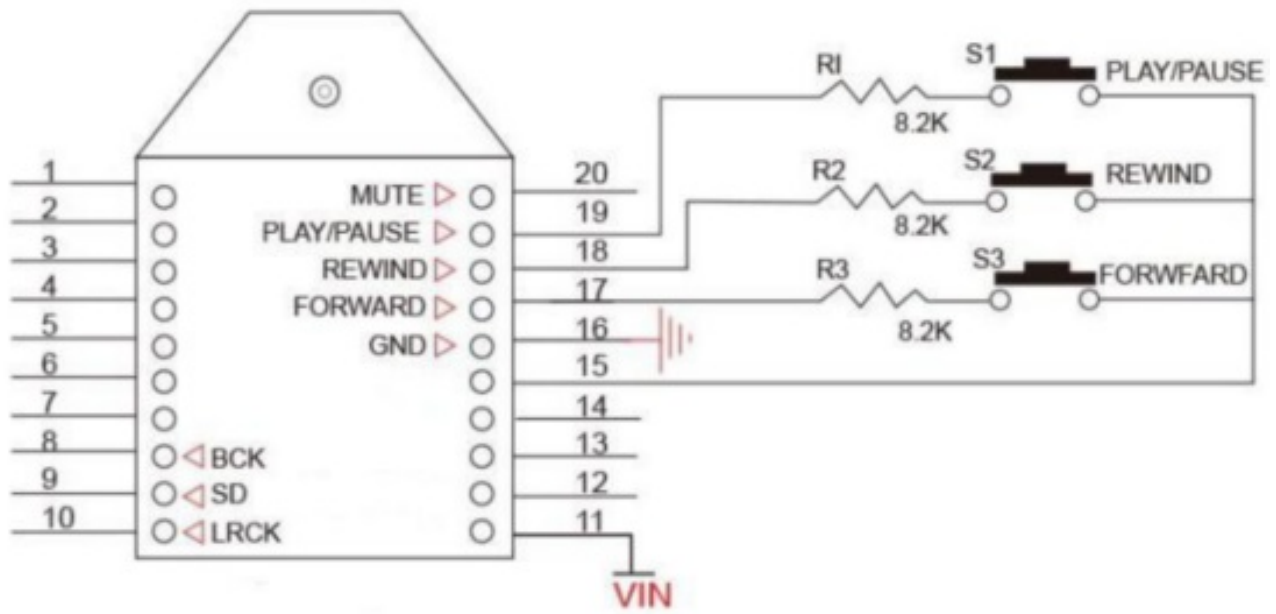

Dimensions

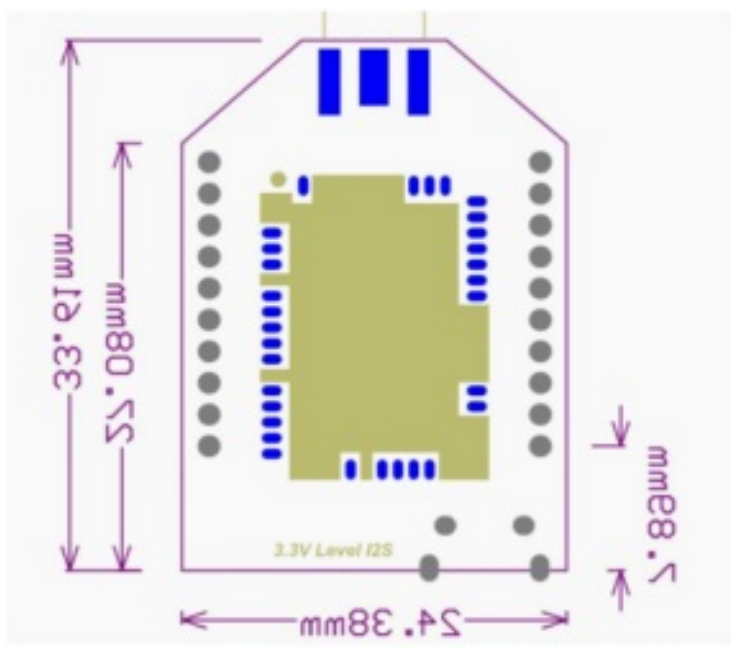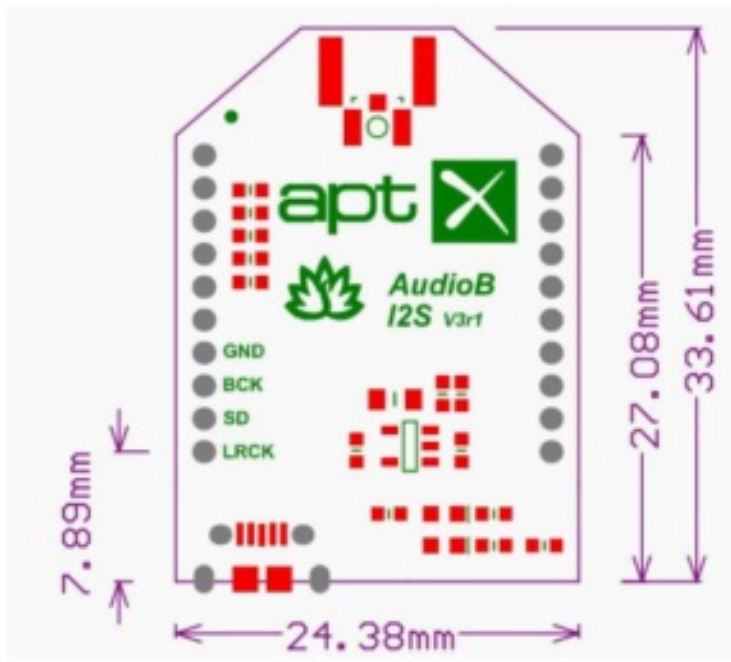

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

RF Exposure

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment

can be used as portable exposure without any restriction.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. Country Code selection feature to be disabled for products marketed to the US/Canada. This device is intended only for OEM integrators under the following conditions:

1. The antenna must be installed such that 20 cm is maintained between the antenna and users, and
2. The transmitter module may not be co-located with any other transmitter or antenna,
3. For all products market in US, OEM has to limit the operation channels in CH1 to CH79 for 2.4G band by supplied firmware programming tool. OEM shall not supply any tool or info to the end-user regarding to Regulatory Domain change. (if modular only test Channel 1-79) As long as the three conditions above are met, further transmitter testing will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

End Product Labeling

The final end product must be labeled in a visible area with the following” Contains FCC ID: 2ARMD-AUDIOBI 2S” Manual Information to the End User The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user’s manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual Integration instructions for host product manufacturers according to KDB 996369 D03 OEM Manual v01.

List of applicable FCC rules

CFR 47 FCC PART 15 SUBPART C & E has been investigated. It is applicable to the modular transmitter

Specific operational use conditions

This module is stand-alone modular. If the end product will involve the Multiple simultaneously transmitting condition or different operational conditions for a stand-alone modular transmitter in a host, host manufacturer have to consult with module manufacturer for the installation method in end system.

Limited module procedures

Not applicable

Trace antenna designs

Not applicable

RF exposure considerations

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Antennas

This radio transmitter FCC ID: 2ARMD-AUDIOBI2S has been approved by Federal Communications Commission to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not

included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Antenna No.:Bluetooth

Type of antenna: PCB Antenna

Gain of the antenna (Max.):3.5 dBi

Frequency range:2402-2480 MHz

Label and compliance information

The final end product must be labeled in a visible area with the following “Contains FCC ID: 2 ARMD-AUDIOBI2S”.

Information on test modes and additional testing requirements

Host manufacturer is strongly recommended to confirm compliance with FCC requirements for the transmitter when the module is installed in the host.

Additional testing, Part 15 Subpart B disclaimer

Host manufacturer is responsible for compliance of the host system with module installed with all other applicable requirements for the system such as Part 15B.

A user's manual for the finished product should include the following statement:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

Note EMI Considerations


Host manufacture is recommended to use D04 Module Integration Guide recommending as “best practice” RF design engineering testing and evaluation in case non-linear interactions generate additional non-compliant limits due to module placement to host components or properties.

How to make changes

This module is stand-alone modular. If the end product will involve the Multiple simultaneously transmitting condition or different operational conditions for a stand-alone modular transmitter in a host, host manufacturer have to consult with module manufacturer for the installation method in end system. According to the KDB 996369 D02 Q&A Q12, that a host manufacture only needs to do an evaluation (i.e., no C2PC required when no emission exceeds the limit of any individual device (including unintentional radiators) as a composite. The host manufacturer must fix any failure.



Documents / Resources

	<p>TinySine AudioB I2S Bluetooth Digital Audio Receiver Module [pdf] User Manual 2ARMD-AUDIOBI2S, 2ARMDAUDIOBI2S, AudioB I2S Bluetooth Digital Audio Receiver Module, AudioB I2S, Bluetooth Digital Audio Receiver Module, Digital Audio Receiver Module, Audio Receiver Module, Receiver Module, Module</p>
---	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.