



TINYTRONICS ESP32-WROOM-32UE Modules with PCB Antenna User Manual

[Home](#) » [TINYTRONICS](#) » TINYTRONICS ESP32-WROOM-32UE Modules with PCB Antenna User Manual 

Contents

- [1 TINYTRONICS ESP32-WROOM-32UE Modules with PCB Antenna](#)
- [2 Product Information](#)
- [3 Overview](#)
- [4 Pin Definitions](#)
- [5 Functional Description](#)
- [6 Crystal Oscillators](#)
- [7 Electrical Characteristics](#)
- [8 Revision History](#)
- [9 FCC Warning](#)
- [10 Documents / Resources](#)
- [11 Related Posts](#)

TINYTRONICS

TINYTRONICS ESP32-WROOM-32UE Modules with PCB Antenna



Product Information

The ESP32-WROOM-32UE is a powerful, generic WiFi-BT-BLE MCU module that can be used in a wide variety of applications. It supports low-power sensor networks as well as demanding tasks such as voice encoding, music streaming, and MP3 decoding.

The module features all GPIOs on the pin-out except for those used for connecting flash. It operates at a voltage range of 3.0 V to 3.6 V and has a frequency range of 2412 MHz to 2462 MHz. It comes with a 4 MB SPI flash for storing user programs and data.

The ESP32-WROOM-32UE module is available in the following configuration:

Module	Chip embedded Flash	PSRAM	Module dimensions (mm)
ESP32-WROOM-32UE	ESP32-D0WDV3	4 MB	N/A

Note: Custom orders are available for ESP32-WROOM-32UE (IPEX) with 8 MB flash or 16 MB flash. For more detailed ordering information, please refer to the Espressif Product Ordering Information.

The ESP32-WROOM-32UE operates on the freeRTOS operating system with LwIP. It also has built-in hardware acceleration for TLS 1.2. The module supports secure (encrypted) over-the-air (OTA) upgrade, allowing users to upgrade their products even after release with minimum cost and effort.

About This Document

This document provides the specifications for the ESP32-WROOM-32UE modules with PCB antenna and IPEX antenna.

Revision History

For revision history of this document, please refer to the last page.

Documentation Change Notification

Espressif provides email notifications to keep customers updated on changes to technical documentation. Please subscribe at www.espressif.com/en/subscribe.

Certification

Download certificates for Espressif products from www.espressif.com/en/certificates.

Disclaimer and Copyright Notice

Information in this document, including URL references, is subject to change without notice. THIS DOCUMENT IS PROVIDED AS IS WITH NO WARRANTIES WHATSOEVER, INCLUDING ANY WARRANTY OF MERCHANTABILITY, NON-INFRINGEMENT, FITNESS FOR ANY PARTICULAR PURPOSE, OR ANY WARRANTY OTHERWISE ARISING OUT OF ANY PROPOSAL, SPECIFICATION OR SAMPLE.

All liability, including liability for infringement of any proprietary rights, relating to use of information in this document is disclaimed. No licenses express or implied, by estoppel or otherwise, to any intellectual property rights are granted herein. The Wi-Fi Alliance Member logo is a trademark of the Wi-Fi Alliance. The Bluetooth logo is a registered trademark of Bluetooth SIG.

All trade names, trademarks and registered trademarks mentioned in this document are property of their respective owners, and are hereby acknowledged.

Copyright © 2019 Espressif Inc. All rights reserved.

Overview

ESP32-WROOM-32UE is a powerful, generic WiFi-BT-BLE MCU module that targets a wide variety of applications, ranging from low-power sensor networks to the most demanding tasks, such as voice encoding, music streaming and MP3 decoding.

It is with all GPIOs on the pin-out except the ones already used for connecting flash. The Module's working voltage can be range from 3.0 V to 3.6 V. Frequency range is 2412 MHz to 2462 MHz. External 40 MHz as clock source for system. There is also a 4 MB SPI flash for storing user programs and data.

The ordering information of ESP32-WROOM-32UE is listed as follows:

Table 1: ESP32-WROOM-32UE Ordering Information

Module	Chip embedded	Flash	PSRAM	Module dimensions (mm)
ESP32-WROOM-32UE	ESP32-D0WD-V3	4 MB 1	/	(18.00 ± 0.10) X (25.50 ± 0.10) X (3.10 ± 0.10) mm (including metallic shield)

Notes:

1. ESP32-WROOM-32UE (IPEX) with 8 MB flash or 16 MB flash is available for custom order.
2. For detailed ordering information, please see Espressif Product Ordering Information.
3. For dimensions of the IPEX connector, please see Chapter 10.

At the core of the module is the ESP32-D0WD-V3 chip*. The chip embedded is designed to be scalable and adaptive. There are two CPU cores that can be individually controlled, and the CPU clock frequency is adjustable from 80 MHz to 240 MHz. The user may also power off the CPU and make use of the low-power co-processor to constantly monitor the peripherals for changes or crossing of thresholds. ESP32 integrates a rich set of peripherals, ranging from capacitive touch sensors, Hall sensors, SD card interface, Ethernet, high-speed SPI, UART, I²S and I²C.

Note: For details on the part numbers of the ESP32 family of chips, please refer to the document ESP32 User Manual.

The integration of Bluetooth, Bluetooth LE and Wi-Fi ensures that a wide range of applications can be targeted, and that the module is all-around: using Wi-Fi allows a large physical range and direct connection to the Internet through a Wi-Fi router, while using Bluetooth allows the user to conveniently connect to the phone or broadcast low energy beacons for its detection. The sleep current of the ESP32 chip is less than 5 A, making it suitable for battery powered and wearable electronics applications. The module supports a data rate of up to 150 Mbps. As such the module does offer industry-leading specifications and the best performance for electronic integration, range, power consumption, and connectivity.

The operating system chosen for ESP32 is freeRTOS with LwIP; TLS 1.2 with hardware acceleration is built in as well. Secure (encrypted) over the air (OTA) upgrade is also supported, so that users can upgrade their products even after their release, at minimum cost and effort. Table 2 provides the specifications of ESP32-WROOM-32UE.


Table 2: ESP32-WROOM-32UE Specifications

Categories	Items	Specifications
------------	-------	----------------

Test	Reliability	HTOL/HTSL/uHAST/TCT/ESD
Wi-Fi	Protocols	802.11 b/g/n 20/n40
		A-MPDU and A-MSDU aggregation and 0.4 s guard interval support
	Frequency range	2.412 GHz ~ 2.462GHz
Bluetooth	Protocols	Bluetooth v4.2 BLE specification
	Radio	NZIF receiver with –97 dBm sensitivity
		Class-1, class-2 and class-3 transmitter
		AFH
	Audio	CVSD and SBC
Hardware	Module interfaces	SD card, UART, SPI, SDIO, I2C, LED PWM, Motor PWM, I2S, IR, pulse counter, GPIO, capacitive touch sensor, ADC, DAC
	On-chip sensor	Hall sensor
	Integrated crystal	40 MHz crystal
	Integrated SPI flash	4 MB
	Integrated PSRAM	–
	Operating voltage/Power supply	3.0 V ~ 3.6 V
	Minimum current delivered by power supply	500 mA
	Recommended operating temperature range	–40 °C ~ 85 °C
	Package size	(18.00±0.10) mm × (31.40±0.10) mm × (3.30±0.10) mm
	Moisture sensitivity level (MSL)	Level 3

Pin Definitions

Pin Layout

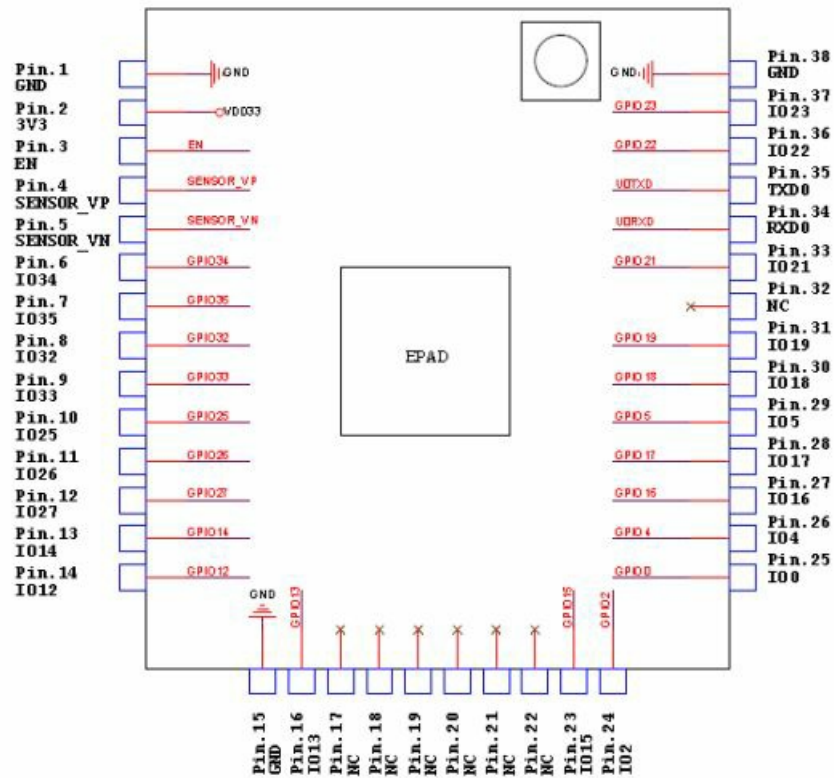

Pin Description

ESP32-WROOM-32UE has 38 pins. See pin definitions in Table 3.

Table 3: Pin Definitions

Name	No.	Type	Function
GND	1	P	Ground
3V3	2	P	Power supply
EN	3	I	Module-enable signal. Active high.
SENSOR_VP	4	I	GPIO36, ADC1_CH0, RTC_GPIO0
SENSOR_VN	5	I	GPIO39, ADC1_CH3, RTC_GPIO3
IO34	6	I	GPIO34, ADC1_CH6, RTC_GPIO4
IO35	7	I	GPIO35, ADC1_CH7, RTC_GPIO5
IO32	8	I/O	GPIO32, XTAL_32K_P (32.768 kHz crystal oscillator input), ADC1_CH4, TOUCH9, RTC_GPIO9
IO33	9	I/O	GPIO33, XTAL_32K_N (32.768 kHz crystal oscillator output), ADC1_CH5, TOUCH8, RTC_GPIO8
IO25	10	I/O	GPIO25, DAC_1, ADC2_CH8, RTC_GPIO6, EMAC_RXD0
IO26	11	I/O	GPIO26, DAC_2, ADC2_CH9, RTC_GPIO7, EMAC_RXD1
IO27	12	I/O	GPIO27, ADC2_CH7, TOUCH7, RTC_GPIO17, EMAC_RX_DV

IO14	13	I/O	GPIO14, ADC2_CH6, TOUCH6, RTC_GPIO16, MTMS, HSPICLK, HS2_CLK, SD_CLK, EMAC_TXD2
IO12	14	I/O	GPIO12, ADC2_CH5, TOUCH5, RTC_GPIO15, MTDI, HSPIQ, HS2_DATA2, SD_DATA2, EMAC_TXD3
GND	15	P	Ground
IO13	16	I/O	GPIO13, ADC2_CH4, TOUCH4, RTC_GPIO14, MTCK, HSPID, HS2_DATA3, SD_DATA3, EMAC_RX_ER
NC	17	–	–
NC	18	–	–
NC	19	–	–
NC	20	–	–
NC	21	–	–
NC	22	–	–
IO15	23	I/O	GPIO15, ADC2_CH3, TOUCH3, MTDO, HSPICS0, RTC_GPIO13, HS2_CMD, SD_CMD, EMAC_RXD3
IO2	24	I/O	GPIO2, ADC2_CH2, TOUCH2, RTC_GPIO12, HSPIWP, HS2_DATA0, SD_DATA0
IO0	25	I/O	GPIO0, ADC2_CH1, TOUCH1, RTC_GPIO11, CLK_OUT1, EMAC_TX_CLK
IO4	26	I/O	GPIO4, ADC2_CH0, TOUCH0, RTC_GPIO10, HSPIHD, HS2_DATA1, SD_DATA1, EMAC_TX_ER
IO16	27	I/O	GPIO16,ADC2_CH8, TOUCH10
IO17	28	I/O	GPIO17,ADC2_CH9, TOUCH11
IO5	29	I/O	GPIO5, VSPICS0, HS1_DATA6, EMAC_RX_CLK
IO18	30	I/O	GPIO18, VSPICLK, HS1_DATA7

Name	No.	Type	Function
IO19	31	I/O	GPIO19, VSPIQ, U0CTS, EMAC_TXD0
NC	32	–	–
IO21	33	I/O	GPIO21, VSPIHD, EMAC_TX_EN
RXD0	34	I/O	GPIO3, U0RXD, CLK_OUT2
TXD0	35	I/O	GPIO1, U0TXD, CLK_OUT3, EMAC_RXD2
IO22	36	I/O	GPIO22, VSPIWP, U0RTS, EMAC_TXD1
IO23	37	I/O	GPIO23, VSPID, HS1_STROBE
GND	38	P	Ground

Notice: GPIO6 to GPIO11 are connected to the SPI flash integrated on the module and are not connected out.

Strapping Pins

ESP32 has five strapping pins, which can be seen in Chapter 6 Schematics:

- MTDI
- GPIO0
- GPIO2
- MTDO
- GPIO5

Software can read the values of these five bits from register "GPIO_STRAPPING".

- During the chip's system reset release (power-on-reset, RTC watchdog reset and brownout reset), the latches of the strapping pins sample the voltage level as strapping bits of "0" or "1", and hold these bits until the chip is powered down or shut down. The strapping bits configure the device's boot mode, the operating voltage of VDD_SDIO and other initial system settings.
- Each strapping pin is connected to its internal pull-up/pull-down during the chip reset. Consequently, if a strapping pin is unconnected or the connected external circuit is high-impedance, the internal weak pull-up/pull-down will determine the default input level of the strapping pins.
- To change the strapping bit values, users can apply the external pull-down/pull-up resistances, or use the host MCU's GPIOs to control the voltage level of these pins when powering on ESP32.
- After reset release, the strapping pins work as normal-function pins.
- Refer to Table 4 for a detailed boot-mode configuration by strapping pins.

Table 4: Strapping Pins

Voltage of Internal LDO (VDD_SDIO)			
Pin	Default	3.3 V	1.8 V
MTDI	Pull-down	0	1

Bootling Mode					
Pin	Default	SPI Boot		Download Boot	
GPIO 0	Pull-up	1		0	
GPIO 2	Pull-down	Don't-care		0	
Enabling/Disabling Debugging Log Print over U0TXD During Booting					
Pin	Default	U0TXD Active		U0TXD Silent	
MTD O	Pull-up	1		0	
Timing of SDIO Slave					
Pin	Default	Falling-edge Sampling	Falling-edge Sampling	Rising-edge Sampling	Rising-edge Sampling
		Falling-edge Output	Rising-edge Output	Falling-edge Output	Rising-edge Output
MTD O	Pull-up	0	0	1	1
GPIO 5	Pull-up	0	1	0	1

Note:

- Firmware can configure register bits to change the settings of "Voltage of Internal LDO (VDD_SDIO)" and "Timing of SDIO Slave" after bootling.
- Internal pull-up resistor (R9) for MTDI is not populated in the module, as the flash and SRAM in ESP32-WROOM-32UE only support a power voltage of 3.3 V (output by VDD_SDIO)

Functional Description

This chapter describes the modules and functions integrated in ESP32-WROOM-32UE.

CPU and Internal Memory

ESP32-D0WD-V3 contains two low-power Xtensa 32-bit LX6 microprocessors. The internal memory includes:

- 448 KB of ROM for bootling and core functions.
- 520 KB of on-chip SRAM for data and instructions.
- 8 KB of SRAM in RTC, which is called RTC FAST Memory and can be used for data storage; it is accessed by the main CPU during RTC Boot from the Deep-sleep mode.
- 8 KB of SRAM in RTC, which is called RTC SLOW Memory and can be accessed by the co-processor during the Deep-sleep mode.
- 1 Kbit of eFuse: 256 bits are used for the system (MAC address and chip configuration) and the remaining 768 bits are reserved for customer applications, including flash-encryption and chip-ID.

External Flash and SRAM

ESP32 supports multiple external QSPI flash and SRAM chips. More details can be found in Chapter SPI in the ESP32 Technical Reference Manual. ESP32 also supports hardware encryption/decryption based on AES to protect developers' programs and data in flash.

ESP32 can access the external QSPI flash and SRAM through high-speed caches.

- The external flash can be mapped into CPU instruction memory space and read-only memory space simultaneously.
 - When external flash is mapped into CPU instruction memory space, up to 11 MB + 248 KB can be mapped at a time. Note that if more than 3 MB + 248 KB are mapped, cache performance will be reduced due to speculative reads by the CPU.
 - When external flash is mapped into read-only data memory space, up to 4 MB can be mapped at a time. 8-bit, 16-bit and 32-bit reads are supported.
- External SRAM can be mapped into CPU data memory space. Up to 4 MB can be mapped at a time. 8-bit, 16-bit and 32-bit reads and writes are supported.

ESP32-WROOM-32UE integrates a 4 MB SPI flash more memory space.

Crystal Oscillators

The module uses a 40-MHz crystal oscillator.

RTC and Low-Power Management

With the use of advanced power-management technologies, ESP32 can switch between different power modes. For details on ESP32's power consumption in different power modes, please refer to section "RTC and Low-Power Management" in ESP32 User Manual.

Peripherals and Sensors

Please refer to Section Peripherals and Sensors in ESP32 User Manual.

Note: External connections can be made to any GPIO except for GPIOs in the range 6-11, 16, or 17. GPIOs 6-11 are connected to the module's integrated SPI flash. For details, please see Section 6 Schematics.

Electrical Characteristics

Absolute Maximum Ratings

Stresses beyond the absolute maximum ratings listed in the table below may cause permanent damage to the device. These are stress ratings only, and do not refer to the functional operation of the device that should follow the recommended operating conditions.

Table 5: Absolute Maximum Ratings

1. The module worked properly after a 24-hour test in ambient temperature at 25 °C, and the IOs in three domains (VDD3P3_RTC, VDD3P3_CPU, VDD_SDIO) output high logic level to ground. Please note that pins occupied by flash and/or PSRAM in the VDD_SDIO power domain were excluded from the test.
2. Please see Appendix IO_MUX of ESP32 User Manual for IO's power domain.

Recommended Operating Conditions

Table 6: Recommended Operating Conditions

Symbol	Parameter	Min	Typical	Max	Unit
VDD33	Power supply voltage	3.0	3.3	3.6	V
I_{VDD}	Current delivered by external power supply	0.5	–	–	A
T	Operating temperature	–40	–	85	°C

DC Characteristics (3.3 V, 25 °C)

Table 7: DC Characteristics (3.3 V, 25 °C)

Symbol	Parameter		Min	Typ	Max	Unit
C_{IN}	Pin capacitance		–	2	–	pF
V_{IH}	High-level input voltage		$0.75 \times V_{DD1}$	–	$V_{DD1} + 0.3$	V
V_{IL}	Low-level input voltage		–0.3	–	$0.25 \times V_{DD1}$	V
I_{IH}	High-level input current		–	–	50	nA
I_{IL}	Low-level input current		–	–	50	nA
V_{OH}	High-level output voltage		$0.8 \times V_{DD1}$	–	–	V
V_{OL}	Low-level output voltage		–	–	$0.1 \times V_{DD1}$	V
I_{OH}	High-level source current ($V_{DD1} = 3.3$ V, $V_{OH} \geq 2.64$ V, output drive strength set to the maximum)	VDD3P3_CPU power domain 1 ; 2	–	40	–	mA
		VDD3P3_RTC power domain 1 ; 2	–	40	–	mA
		VDD_SDIO power domain 1 ; 3	–	20	–	mA

Symbol	Parameter	Min	Typ	Max	Unit
I_{OL}	Low-level sink current (VDD1 = 3.3 V, VOL = 0.495 V, output drive strength set to the maximum)	–	28	–	mA
R_{PU}	Resistance of internal pull-up resistor	–	45	–	kΩ
R_{PD}	Resistance of internal pull-down resistor	–	45	–	kΩ
V_{IL_nRST}	Low-level input voltage of CHIP_PU to power off the chip	–	–	0.6	V

Notes:

1. Please see Appendix IO_MUX of ESP32 User Manual for IO's power domain. VDD is the I/O voltage for a particular power domain of pins.
2. For VDD3P3_CPU and VDD3P3_RTC power domain, per-pin current sourced in the same domain is gradually reduced from around 40 mA to around 29 mA, VOH>=2.64 V, as the number of current-source pins increases.
3. Pins occupied by flash and/or PSRAM in the VDD_SDIO power domain were excluded from the test.

Wi-Fi Radio

Table 8: Wi-Fi Radio Characteristics

Parameter	Condition	Min	Typical	Max	Unit
Operating frequency range <i>note 1</i>	–	2412	–	2462	MHz
Output impedance <i>note2</i>	–	–	*	–	Ω
TX power <i>note3</i>	–	802.11b:24.16dBm;802.11g:23.52dBm 802.11n20:23.01dBm;802.11n40:21.18dBm			
Sensitivity	11b, 1 Mbps	–	–98	–	dBm
	11b, 11 Mbps	–	–89	–	dBm
	11g, 6 Mbps	–	–92	–	dBm
	11g, 54 Mbps	–	–74	–	dBm
	11n, HT20, MCS0	–	–91	–	dBm
	11n, HT20, MCS7	–	–71	–	dBm
	11n, HT40, MCS0	–	–89	–	dBm
	11n, HT40, MCS7	–	–69	–	dBm
Adjacent channel rejection	11g, 6 Mbps	–	31	–	dB
	11g, 54 Mbps	–	14	–	dB
	11n, HT20, MCS0	–	31	–	dB
	11n, HT20, MCS7	–	13	–	dB

1. Device should operate in the frequency range allocated by regional regulatory authorities. Target operating frequency range is configurable by software.
2. For the modules that use IPEX antennas, the output impedance is 50 Ω. For other modules without IPEX antennas, users do not need to concern about the output impedance.
3. Target TX power is configurable based on device or certification requirements.

Bluetooth/BLE Radio

Receiver

Table 9: Receiver Characteristics – Bluetooth/BLE


Parameter	Conditions	Min	Typ	Max	Unit
Sensitivity @30.8% PER	–	–	–97	–	dBm
Maximum received signal @30.8% PER	–	0	–	–	dBm
Co-channel C/I	–	–	+10	–	dB
Adjacent channel selectivity C/I	$F = F_0 + 1 \text{ MHz}$	–	–5	–	dB
	$F = F_0 - 1 \text{ MHz}$	–	–5	–	dB
	$F = F_0 + 2 \text{ MHz}$	–	–25	–	dB
	$F = F_0 - 2 \text{ MHz}$	–	–35	–	dB
	$F = F_0 + 3 \text{ MHz}$	–	–25	–	dB
	$F = F_0 - 3 \text{ MHz}$	–	–45	–	dB
Out-of-band blocking performance	30 MHz ~ 2000 MHz	–10	–	–	dBm
	2000 MHz ~ 2400 MHz	–27	–	–	dBm
	2500 MHz ~ 3000 MHz	–27	–	–	dBm
	3000 MHz ~ 12.5 GHz	–10	–	–	dBm
Intermodulation	–	–36	–	–	dBm

Transmitter

Table 10: Transmitter Characteristics – Bluetooth/BLE

Parameter	Conditions	Min	Typ	Max	Unit
Gain control step	—	—	3	—	dBm
RF power	—	BT3.0:7.73dBm BLE:4.92dBm			dBm
Adjacent channel transmit power	$F = F_0 \pm 2 \text{ MHz}$	—	-52	—	dBm
	$F = F_0 \pm 3 \text{ MHz}$	—	-58	—	dBm
	$F = F_0 \pm > 3 \text{ MHz}$	—	-60	—	dBm
$\Delta f_{1\text{avg}}$	—	—	—	265	kHz
Δf_2 max	—	247	—	—	kHz
$\Delta f_{2\text{avg}}/\Delta f_{1\text{avg}}$	—	—	-0.92	—	—
ICFT	—	—	-10	—	kHz
Drift rate	—	—	0.7	—	kHz/50 s
Drift	—	—	2	—	kHz

Reflow Profile

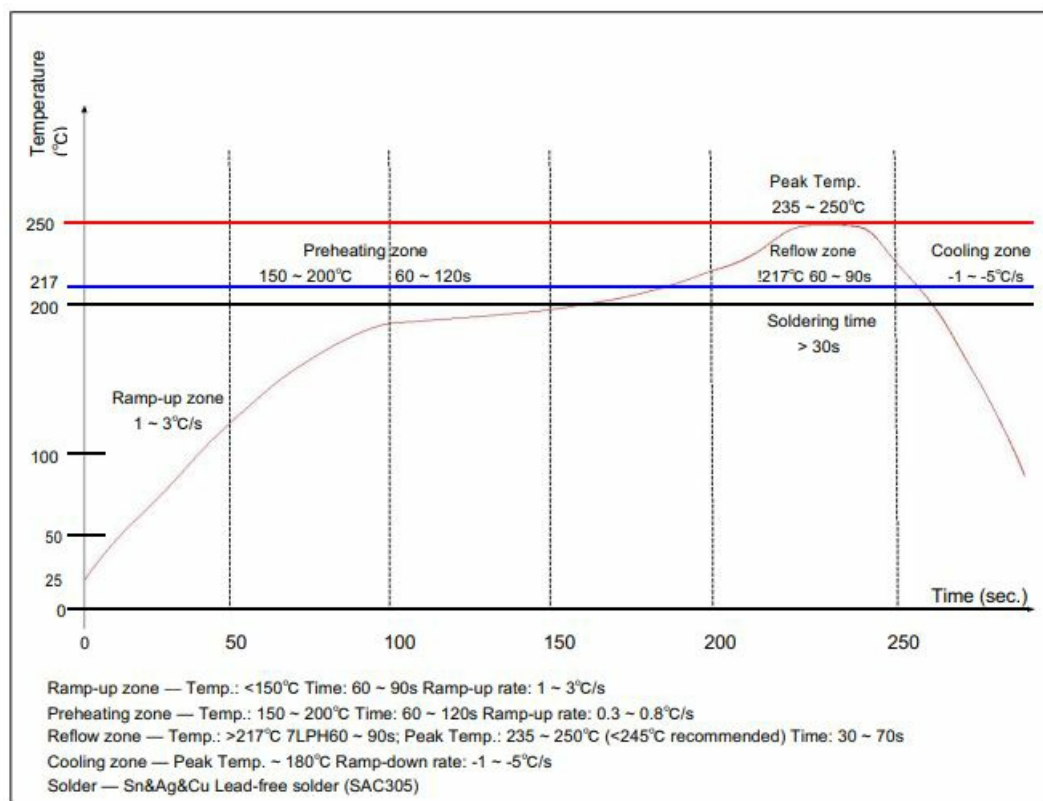

Revision History

Date	Version	Release notes
2020.02	V0.1	Preliminary release for certification CE.

OEM Guidance

1. Applicable FCC rules This module is granted by Single Modular Approval. It complies to the requirements of FCC part 15C, section 15.247 rules.
2. The specific operational use conditions This module can be used in IoT devices. The input voltage to the module is nominally 3.0V-3.6 V DC. The operational ambient temperature of the module is -40 to 85 degree C. Only the embedded PCB antenna is allowed. Any other external antenna is prohibited.
3. Limited module procedures N/A
4. Trace antenna design N/A
5. RF exposure considerations The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body. If the equipment built into a host as a portable usage, the additional RF exposure evaluation may be required as specified by 2.1093.
6. Antenna
Antenna type: Dipole antenna with IPEX connector; Peak gain: 4.4dBi
7. Label and compliance information An exterior label on OEM's end product can use wording such as the following: "Contains Transmitter Module FCC ID: 2AVCN-NWPXXX" or
"Contains FCC ID: 2AVCN-NWPXXX."
8. Information on test modes and additional testing requirements
 - **a)**The modular transmitter has been fully tested by the module grantee on the required number of channels, modulation types, and modes, it should not be necessary for the host installer to re-test all the available transmitter modes or settings. It is recommended that the host product manufacturer, installing the modular transmitter, perform some investigative measurements to confirm that the resulting composite system does not exceed the spurious emissions limits or band edge limits (e.g., where a different antenna may be causing additional emissions).
 - **b)**The testing should check for emissions that may occur due to the intermixing of emissions with the other transmitters, digital circuitry, or due to physical properties of the host product (enclosure). This investigation is especially important when integrating multiple modular transmitters where the certification is based on testing each of them in a stand-alone configuration. It is important to note that host product manufacturers should not assume that because the modular transmitter is certified that they do not have any responsibility for final product compliance.
 - **c)**If the investigation indicates a compliance concern the host product manufacturer is obligated to mitigate the issue. Host products using a modular transmitter are subject to all the applicable individual technical rules as well as to the general conditions of operation in Sections 15.5, 15.15, and 15.29 to not cause interference. The operator of the host product will be obligated to stop operating the device until the interference have been corrected .
9. Additional testing, Part 15 Sub part B disclaimer The final host / module combination need to be evaluated against the FCC Part 15B criteria for unintentional radiators in order to be properly authorized for operation as a Part 15 digital device.

The host integrator installing this module into their product must ensure that the final composite product complies with the FCC requirements by a technical assessment or evaluation to the FCC rules, including the transmitter operation and should refer to guidance in KDB 996369. For host products with certified modular transmitter, the frequency range of investigation of the composite system is specified by rule in Sections 15.33(a)(1) through (a)(3), or the range applicable to the digital device, as shown in Section 15.33(b)(1), whichever is the higher frequency range of investigation When testing the host product, all the transmitters must be operating. The transmitters can be enabled by using publiclyavailable drivers and turned on, so the transmitters are active. In certain conditions it might be appropriate to use a technology-specific call box (test set) where accessory 50 devices or drivers are not available. When testing for emissions from the unintentional radiator, the transmitter shall be placed in the receive mode or idle mode, if possible. If receive mode only is not possible then, the radio shall be passive (preferred) and/or active scanning. In these cases, this would need to enable activity on the communication BUS (i.e., PCIe, SDIO, USB) to ensure the unintentional radiator circuitry is enabled. Testing laboratories may need to add attenuation or filters depending on the signal strength of any active beacons (if applicable) from the enabled radio(s). See ANSI C63.4, ANSI C63.10 and ANSI C63.26 for further general testing details.

The product under test is set into a link/association with a partnering device, as per the normal intended use of the product. To ease testing, the product under test is set to transmit at a high duty cycle, such as by sending a file or streaming some media content.

FCC Warning

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference,
- 2. This device must accept any interference received, including interference that may cause undesired operation

Documents / Resources

<div><div><div>ESP32-WROOM-32UE</div><div>User Manual</div></div><div><div><div><div></div><div></div></div><div><div></div><div></div></div></div><div></div></div></div>	<div><div><div>TINYTRONICS ESP32-WROOM-32UE Modules with PCB Antenna [pdf] User Manual</div><div>2AVCN-NWPXXX, 2AVCNNWPXXX, nwpxxx, ESP32-WROOM-32UE, ESP32-WROOM-32UE</div><div>Modules with PCB Antenna, Modules with PCB Antenna, PCB Antenna, Antenna</div></div></div>
--	---