



TOBENONE UDS019 USB-C Dual Display Docking Station User Guide

[Home](#) » [TOBENONE](#) » TOBENONE UDS019 USB-C Dual Display Docking Station User Guide 

Contents

- [1 TOBENONE UDS019 USB-C Dual Display Docking Station](#)
- [2 Ports and connectors](#)
- [3 Quick Start Guide](#)
- [4 Troubleshooting](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)



TOBENONE UDS019 USB-C Dual Display Docking Station




THANK YOU!

Thank you for your purchase of the Tobenone 14-in-1 USB-C Dual Display Dock UDS-019! Our Dock provides the ability to connect up to TWO HD displays, RJ45 Gigabit Ethernet, audio input and output, 6 USB peripherals and SD/TF slot to your USB-C system via ONE USB-C cable.

Free warranty Extended

Register your product for a FREE upgrade to a 24-Month Warranty: www.tobenone.com/warranty

Ports and connectors

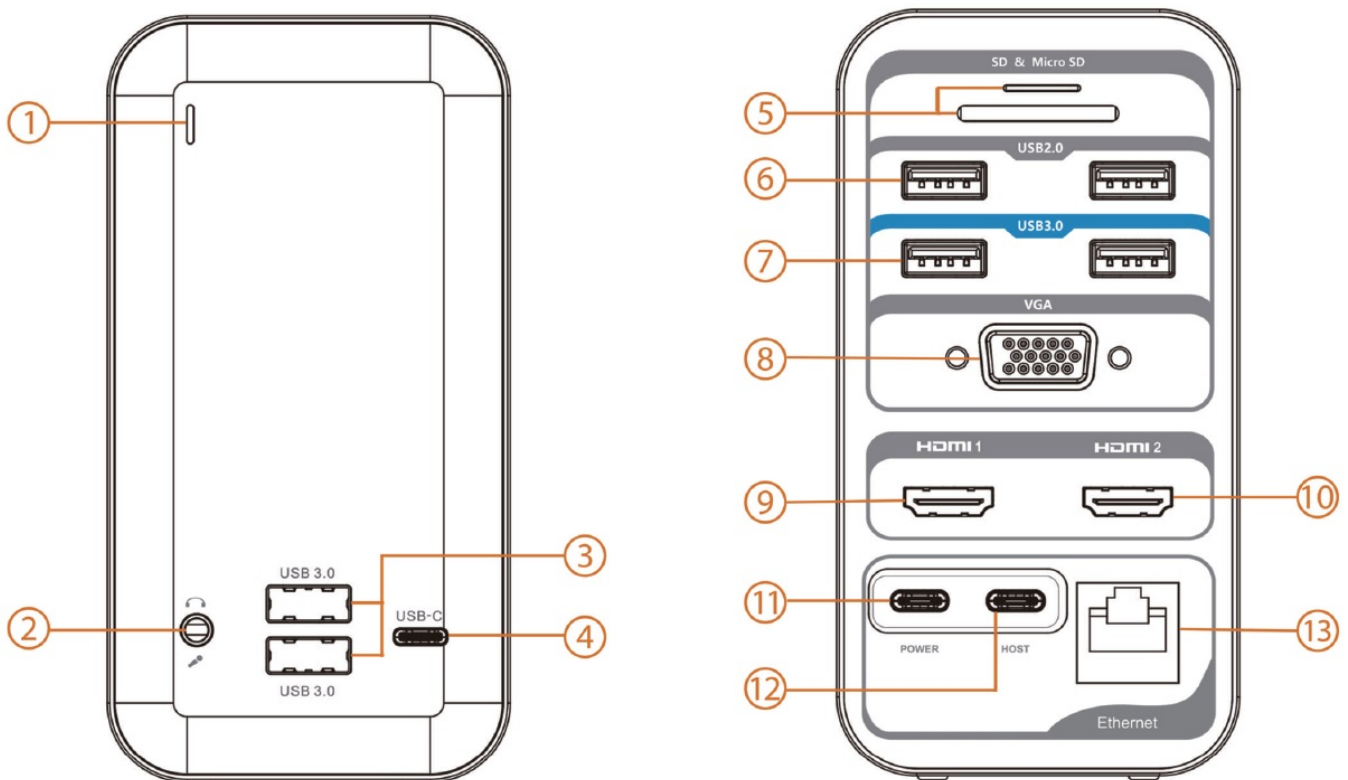

1. working indicator light
2. 3.5mm Audio/Microphone
3. 2 x USB 3.0: 5Gbps, 5V@0.9A
4. USB-C Gen1: Data transfer up to 5Gbps, 5V@0.9A
5. SD/Micro SD: UHS-1, supports SDXC,SDHC,SD,MMC,RS-MMC Card
6. 2 x USB 2.0: 480Mbps, special for mouse and keyboard
7. 2 x USB 3.0: 5Gbps, 5V@0.9A
8. VGA: 1080P@60Hz
9. HDMI 1: 4K@30Hz
10. HDMI 2: 4K@30Hz or 4K@60Hz on DP1.4
11. USB-C PD 3.0: Support 100W adapter, max 87W charging for safety
12. USB-C to Host: Connect your USB-C laptop
13. RJ45 Gigabit Ethernet: 10/100/1000Mbps

Quick Start Guide

Step 1: Connect power adapter to USB-C Power(@) input port on the dock

Step 2: Connect the dock and laptop via USB HOST(@) and a USB-C to USB-C cable as provided

Step 3: Connect two monitors via any two ports of HDMI 1, HDMI 2 and VGA

Dual HD Extended Monitors Configuration



HDMI1 + HDMI2 OR HDMI1 + VGA OR HDMI2 + VGA

Step 4: Attach USB 3.0 and USB-C devices(USB driver, keyboard, mouse, printer etc.) to the USB ports on both the front and back of the dock(3,4,6,7), Insert SD card, TF/Micro SD card into SD/TF slot(5)



Keyboard



Mouse



USB Drive



Printer



Phone



SD



TF

Step 5: Connect speaker/headphones or microphone to the front audio ports(2). Connect the Ethernet cable to RJ45 Ethernet port(13)



Troubleshooting

NO display output via HDMI and VGA.

1. Please make sure the USB-C port of your devices(Laptop/Tablet) supports display output feature (Alt-mode DisplayPort)
2. Please check if the connection between the monitors, dock and laptop is tight
3. Please use the Standard HDMI and VGA cable, HDMI to HDMI and VGA to VGA cable is recommended

NO audio output from monitor

1. Please make sure your monitor supports audio output function
2. Set the external monitor as default audio output device

Any questions, we are here to help!

Email: support@tobenone.com

Because the only question we can't fix is the one we don't know



Documents / Resources

	TOBENONE UDS019 USB-C Dual Display Docking Station [pdf] User Guide UDS019 USB-C Dual Display Docking Station, UDS019, USB-C Dual Display Docking Station, Display Docking Station, Docking Station
---	---

